

Interpretable Real-Time Win Prediction for Honor of Kings – a Popular Mobile MOBA Esport

Zelong Yang

Tsinghua-Berkeley Shenzhen Institute, Tsinghua University
yangzelong14@gmail.com

Deng Cai

The Chinese University of Hong Kong
thisisjcykcd@gmail.com

Zhufeng Pan

University of California, Los Angeles
panzhufeng@cs.ucla.edu

Yan Wang

AI Lab, Tencent Inc.
brandenwang@tencent.com

Shuming Shi

AI Lab, Tencent Inc.
shumingshi@tencent.com

Shao-Lun Huang

Tsinghua-Berkeley Shenzhen Institute, Tsinghua University
shaolun.huang@sz.tsinghua.edu.cn

Xiaojiang Liu

AI Lab, Tencent Inc.
kieranliu@tencent.com

ABSTRACT

With the rapid prevalence and explosive development of MOBA esports (Multiplayer Online Battle Arena electronic sports), many research efforts have been devoted to automatically predicting the game results (win predictions). While this task has great potential in various applications such as esports live streaming and game commentator AI systems, previous studies suffer from two major limitations: 1) insufficient *real-time* input features and high-quality training data; 2) *non-interpretable* inference processes of the black-box prediction models. To mitigate these issues, we collect and release a large-scale dataset that contains real-time game records with rich input features of the popular MOBA game *Honor of Kings*. For interpretable predictions, we propose a *Two-Stage Spatial-Temporal Network (TSSTN)* that can not only provide accurate real-time win predictions but also attribute the ultimate prediction results to the contributions of different features for interpretability. Experiment results and applications in real-world live streaming scenarios show that the proposed TSSTN model is effective both in prediction accuracy and interpretability.

CCS CONCEPTS

•Applied computing → Forecasting;

KEYWORDS

datasets, MOBA esports, win prediction, interpretable

1 INTRODUCTION

Nowadays, MOBA esports have become increasingly popular. For example, one of the world's three most popular and highest-grossing MOBA games *Honor of Kings* (*HoK*, whose international version is named *Arena of Valor*) is attracting more than 80 million daily active players and 200 million monthly active players¹. Other popular MOBA games *DotA II* and *LoL* also have tens of millions of



Figure 1: Application of a non-interpretable prediction model in the LoL 2019 World Championship live streaming. Due to the lack of interpretability, the commentators can merely make simple comments like “Now the win probability of the Blue Team is 80%”.

players worldwide. In the last *King Pro League* Fall 2019 tournament for *HoK*, the prize pool reached 1.13 million dollars². Due to the enormous popularity of MOBA esports, related industries such as esports live streaming and game commentator AI systems have emerged with increasingly huge amounts of profit. Under the circumstances, much research [3, 9, 13, 17, 23, 25] has been done for automatic MOBA esports win predictions.

Although some progress has been made, existing studies on MOBA esports win predictions are limited in terms of the following two aspects.

First, previous studies have limited scope of applications because of their input feature designs. Specifically, most existing MOBA esports datasets [3, 13, 17, 19] only support pre-game win predictions because only pre-game features such as team compositions (hero selections) are included. However, real-time predictions are more informative and useful in practice. Other MOBA esports datasets suffer from insufficient real-time features. For example, the dataset of [25] only contains three real-time features: gold, experience, and death. The lack of sufficient discriminative features can limit the prediction accuracy, impeding the usage in practice.

¹https://en.wikipedia.org/wiki/Honor_of_Kings

²https://liquipedia.net/arenaofvalor/King_Pro_League/2019/Fall

Second, current win prediction models for MOBA esports [8, 26] are black-box neural models that mix different features in the same vector space, which can not provide any clue as to why the prediction is made. The lack of interpretability dramatically limits their applications in industry scenarios such as esports live streaming. As one can see in Figure 1, the non-interpretable prediction model used in *LoL* 2019 World Championship can only give the win probabilities of the two teams (80% and 20%). Since the game commentators are not aware of the underlying reasons for the prediction results, they can merely make some simple comments such as “Now the win probability of the Blue Team is 80.0%” which is dull and non-informative. In contrast, once we can provide more interpretable predictions such as: {WinProbBlue: 80.0%, Factor 1: towers, Factor 2: team compositions}, more attractive comments can be made such as: “*The Blue Team destroyed three towers in the past five minutes and thus accumulated a huge advantage in terms of vision. Besides, with a more powerful team composition, they now have a very high win probability of 80.0%*.”

To address the above problems, we collect and release a large-scale dataset that contains abundant real-time game records of the popular MOBA game *HoK*. A critical characteristic of these game records is that they are played by highly-skilled human players (top 1% according to the game leaderboard). Since matches with higher skill levels result in fewer random factors [3, 25], the collected dataset is more predictable and thus can result in more reliable models. The dataset covers 184,362 real human games, and the real-time game records are collected every 30 seconds, generating 5,253,661 data-frames in total. For each data-frame, the most discriminative and human-perceptible features are included, such as teams’ accumulated gold, kill-counts, and tower-counts.

With the collected dataset above, we propose a *Two-Stage Spatial-Temporal Network (TSSTN)*, which gives not only the accurate win predictions but also human-interpretable intermediate results. In the first *Spatial-stage*, features are grouped into six distinct *feature groups* and projected onto six separate representation spaces. Upon these spaces, we build six *Spatial-models* that take individual feature groups as input only and make the respective win predictions. Then, through a deep investigation of MOBA games, we find that the same features are not invariantly important throughout the games due to the different happening time of important in-game events. To better model this “temporal” characteristic, in the second stage (*Temporal-stage*) we assign six time-variant weights to the six Spatial-models, and the ultimate win prediction is made through the weighted combination of Spatial-models’ outputs.

The proposed TSSTN model is interpretable in that it separates the effects of features’ values and importance to decouple their contributions: 1) The Spatial-models’ outputs are independent win predictions based on single feature groups, which indicate the two teams’ **win-or-lose likelihood** in the domains of different feature groups (Spatial-domains). 2) The six time-variant weights of the Temporal-stage represent the **relative importance** of different feature groups at specific time-points. 3) The product of the Spatial-models’ output and its time-variant weight denotes the **contribution** of the single feature group to the ultimate win prediction.

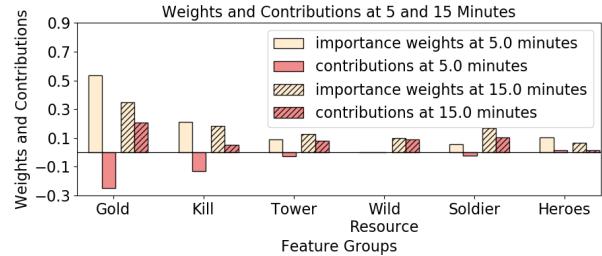


Figure 2: Intermediate prediction results in an *HoK* game. This figure shows the importance weights and contributions of six feature groups in the example game at 5 minutes and 15 minutes.

It is worth noting that high importance does not necessarily lead to a large contribution. For example, team gold is a high-importance feature at most time-points, but its contribution will still be insignificant if the two teams have approximate amounts of gold at the current time-point. On the other hand, features with relatively low importance could still make a non-negligible contribution if the Spatial-model’s distinct prediction output is high enough.

Figure 2 is an illustration of the interpretable intermediate results given by the TSSTN model. As shown, our system gives information about the importance weights and contributions of the six feature groups to explain the underlying reasons for the ultimate predictions. At 5.0 minutes, the most contributed feature groups are *Gold*, *Kill*, and *Tower*, as the pure coral bars show; at 15.0 minutes, the most contributed features change to *Gold*, *Soldier*, and *Wild Resource*, as the hatched coral bars show. In this example, the *Gold* feature’s importance and contribution decrease as the match progresses, while other features’ (such as *Tower* and *Soldier*) contributions and importance increase as the match goes on.

Experiments show that the TSSTN model gives accurate real-time win predictions as well as human-interpretable intermediate results for the popular MOBA game *HoK*. Besides, the TSSTN model has already been implemented in a real-world AI commentator system to provide human-interpretable prediction results.

The contributions of our work are summarized as follows:

- A large-scale *HoK* dataset for real-time MOBA esports win prediction is collected and utilized to train reliable prediction models. This dataset will be publicly released so that other researchers could reproduce our work and carry out their ideas on MOBA esports
- A *Two-Stage Spatial-Temporal Network (TSSTN)* is proposed to make real-time interpretable win predictions by attributing the predictions to the contributions of different features.
- Experiment results and applications in a real-world AI commentator system demonstrate the effectiveness and interpretability of the proposed TSSTN model.

2 RELATED WORK

Due to the high demand of game result forecasts, much research has been done to predict the results of the games, both for traditional

sports and MOBA esports. In this section, we introduce some related work on the topic of game result predictions, including traditional sports win predictions, MOBA esports pre-game win predictions, and MOBA esports real-time win predictions.

2.1 Traditional Sports Win Prediction

Due to the high demand from related industries, there have been many studies aiming to predict the winners of traditional sports, such as basketball [11, 12, 18], football [4, 14], and others [1, 21]. In these works, the authors first collect their datasets containing pre-game or real-time information, then build models to predict the results based on their selected features. These models prove to be useful to some extent, but there are two issues that need to be stressed. Firstly, to make sure that the games are of the same skill level, the datasets should contain games in the same professional competitions, such as *NBA (National Basketball Association)* for basketball and *NFL (National Football League)* for football. However, the amount of such sports competitions' data is way insufficient to train reliable models, considering the limited number of matches every year. Secondly, there are too many off-game variables in traditional sports, such as weather conditions. Therefore it is hard to comprehensively and objectively choose the suitable features.

2.2 MOBA Esports Pre-Game Win Prediction

MOBA esports games, on the other hand, are naturally suitable for the task of result prediction. For one thing, huge amounts of structured non-privacy game data can be easily collected from the game database to train reliable models; for the other, the variables in MOBA esports are relatively fewer and easier to obtain. With the rapid development and prevalence of MOBA esports, much research has been done to predict the results of MOBA esports games, such as [6, 15]. Among these works, [3] first starts the research on MOBA esports result predictions, then [9, 13, 19] follow this work to make pre-game win predictions. Semenov et al. [2016] and Wang et al. [2018] suggest several machine learning methods to predict the MOBA esports using pre-game information such as team compositions. Chen et al. [2018] study the synergy and restrain relations among heroes. These works, however, lack real-time data, which limits their usages.

2.3 MOBA Esports Real-Time Win Prediction

Yang et al. [2016] first use real-time data to predict the results of MOBA esports. However, their training data and selected features are insufficient (just less than one-third of the training data contains real-time information, and only three real-time features are collected). Besides, the results of this work are non-interpretable, which further limits their use. Hodge et al. [2017] use game data of different skill levels to mitigate the inefficiency of training data. [10] is aimed at predicting the events inside the games such as hero deaths. Demediuk et al. [2019] use unsupervised learning technologies to explore the roles of heroes in MOBA esports.

Another type of research on esports win predictions is to train game AI using reinforcement learning technologies, such as [20] for *StarCraft II*, [26, 27] for *Honor of Kings*, and [16] for *DotA II*. Trained appropriately, value-based reinforcement learning models are capable of giving real-valued win prediction results. Although

Table 1: An example data-frame at time 9.5 minutes.

time: 9.5		
win side: ...	middleTowerCnt: 3	
lose side: ...	crystalTowerCnt: 3	
hero id:	AD:	
52, 96, 56, 23, 31	alive: true	
hero: ...	id: 31	
52: ...	Raider: ...	
profession: mage	AP: ...	
deadCnt: 3	overlord: 0	
assistCnt: 1	darkTyrant: 0	
killCnt: 0	numOverlord: 0	
gold: 3338	numDarkTyrant: 0	
96: ...	numTyrant: 0	
56: ...	numRedBuf: 0	
23: ...	numBlueBuf: 0	
31: ...	soldierDist:	
teamGold: 23884	lower: 8544	
kill: 6	upper: 8932	
participation: 0.67	middle: 7273	
towerCnt: 7		

these game AI models can give real-time win predictions, they are black-box models without any interpretability.

Based on these previous works, our work utilizes sufficient MOBA esports data with diverse real-time features and designs a TSSTN model to give reliable and interpretable prediction results. Our work has already been implemented in a real AI commentator system for *HoK*. To the best of our knowledge, our work is among the initial attempts to realize interpretable prediction models for MOBA esports win predictions.

3 DATASET

HoK is a mobile MOBA game that enjoys great popularity globally. In *HoK*, two teams of five heroes combat against each other to destroy the “*Crystal*” (home base) of the rival team for victory. A detailed game introduction can be found at [24].

Based on the game settings, we collect the anonymized information of all the 184,362 games that happened within a randomly chosen day in June 2019 from the official game database. Prior experiments for data scale indicate that one day's data is sufficient for our task. Please note that to ensure the quality of games, only “*Conquerors*”-level games whose participants are top 1% players are collected (according to [3, 25]). To reduce the redundancy of the dataset, we extract the features every half minute. It means that a 15-minute game will transform to 30 data-frames in the collection process, and we obtain 5,253,661 data-frames in total. In each data-frame, 96 features from the game process are extracted, which include sufficient information that we think is helpful for the win prediction. Aside from some obviously useful information such as gold, kill-count, and tower-count of each team, we also calculate some potentially helpful features, such as soldiers' distances to the

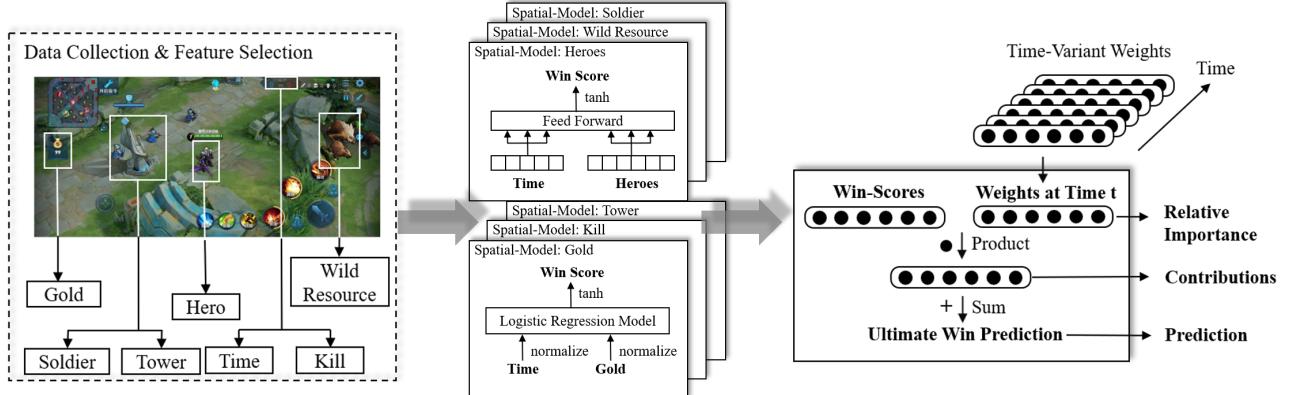


Figure 3: The flowchart of the proposed TSSTN model. The left part displays the data collection and feature selection procedures. The middle part is the Spatial-stage. Each Spatial-model is designed for one feature group to give individual prediction (win-score). The right part shows the Temporal-stage. The time-dependent importance weights combine with Spatial-models' outputs to give the ultimate win prediction. The middle part (Spatial-stage) consists of two kinds of Spatial-models: feed-forward networks and logistic regression models. For feed-forward Spatial-models, the features (including time) are converted into embedding vectors as input; for logistic regression Spatial-models, the input features are scalars.

rival “Crystal”, buff information, and wild resource occupancy. An illustration of one data-frame is shown in Table 1, where fields of different layers are separated using indents, and repeated fields are omitted using ellipses.

In order to facilitate the future study of MOBA esports win predictions, this dataset will be publicly released.³

4 MODEL

In this section, we introduce the Two-Stage Spatial-Temporal Network (TSSTN) model for interpretable real-time MOBA esports win predictions. In the first *Spatial-stage*, we categorize the features into six feature groups: *Gold*, *Kill*, *Tower*, *Wild Resource*, *Soldier*, and *Heroes*. Then we project them onto different representation spaces. Upon each space, a *Spatial-model* is built to compute a *win-score* $s_i \in [-1.0, 1.0]$ that represents the win-or-lose likelihood prediction based on this feature group. Since each Spatial-model is not aware of the features in other feature groups, its output (win-score) can be regarded as the independent win prediction of the team in each specific feature domain. Moreover, these spaces (feature groups) are neither equally important with each other (in spatial-dimensions) nor invariantly important throughout the games (in temporal-dimensions). For example, feature group *Soldier* (soldiers’ distances to the rival Crystal) becomes more and more important because soldiers become more and more potent as the games go on. To better model the temporal variance of feature groups’ relative importance, in the second *Temporal-stage* we assign a time-variant and learnable weight to each Spatial-model. Finally, the inner product of the win-score vector $s = [s_1, s_2, \dots, s_6]$ and the time-dependent importance weight vector $w^t = [w_1^t, w_2^t, \dots, w_6^t]^T$ is the ultimate prediction result F^t . Figure 3 demonstrates the flowchart of the proposed TSSTN model.

In this two-stage architecture, some intermediate results can help interpret the ultimate win predictions. 1) The weight vector w^t at

time t reveals the relative importance of the feature groups at that time. It varies over time because feature groups are not invariantly important at different game processes. 2) The product $w_i^t \cdot s_i$ of feature group x_i ’s importance weight w_i^t and win-score s_i directly contributes to the ultimate win prediction F^t as $F^t = \sum_i w_i^t \cdot s_i$. Therefore, we refer to the value of $w_i^t \cdot s_i$ as the *contribution* of feature group x_i . This contribution reveals the effects of two teams’ feature differences and features’ importance on the ultimate prediction result. Based on this scheme, we can easily explain how the ultimate win prediction F^t is made according to the above interpretable information. In previous studies, this information is hidden in the entangled parameters of the “black-box” models, and there is no way we can interpret them.

4.1 Feature Selection

As for the feature selections for the TSSTN model, we select 11 types of features in every data-frame and classify these features into six feature groups:

- **Gold:** The difference in the accumulated amounts of gold between the two teams. Gold can be used to purchase more powerful equipment to enhance the attributes (such as *health-point*, *attack*, and *defence*) of the heroes.
- **Kill:** The difference in the kill-counts of the two teams. By killing the rival heroes, extra gold and experience can be obtained to purchase equipment and level up, respectively.
- **Tower:** The difference in the numbers of existing defence towers, including three kinds of towers (front, middle, and Crystal towers). Defence towers can hold back the rival heroes and soldiers as well as provide vision.
- **Wild Resource:** The difference of the wild resources, including two types of wild monsters: *Dark Tyrants* and *Overlords*. By killing these monsters, the whole team obtain buffs that can provide extra gold, experience, and attributes.

³ The full dataset will be released in the camera-ready version.

- **Soldier:** The soldiers' distances to the opponent "Crystal", including the distances in the three lanes (top, middle, and bottom lanes). Soldiers are useful in terms of destroying towers, which are unavoidable obstacles to get to the rival "Crystal". As the game goes on, the soldiers will become more and more potent according to the MOBA game settings.
- **Heroes:** The id of heroes selected by the players. Since there are certain restrain and synergy relations among heroes, this information can be utilized to improve the prediction accuracy before and during the games.

As the input of the TSSTN model, different feature groups will be preprocessed in different manners according to their Spatial-models. As the middle part of Figure 3 shows, the first three numerical feature groups will be normalized using min and max feature values, and the rest three categorical feature groups will be converted into embedding vectors.

4.2 Spatial-Stage

As mentioned above, the Spatial-stage consists of three logistic regression models and three feed-forward neural networks called *Spatial-models*. We use logistic regression models for numerical feature groups (*Gold*, *Kill*, and *Tower*), and use two-hidden-layer feed-forward neural networks for categorical feature groups (*Wild Resource*, *Soldier*, and *Heroes*). For Spatial-model i , the input consists of its corresponding feature group x_i introduced in Section 4.1 and the current game time t . The output of Spatial-model i is a win-score $s_i(x_i, t) \in [-1.0, 1.0]$, representing the win-or-lose likelihood prediction based on the single feature group's value difference.

Note that although adopting more sophisticated Spatial-model architectures for different feature groups is possible to improve the overall prediction accuracy further, it is not the primary purpose of this study. We want to focus on the interpretability of MOBA esports win predictions, so we choose simple-architecture networks (logistic regression models and feed-forward networks) for the feature groups. In real-world scenarios, one can deliberately design different model-architectures for different feature groups.

4.3 Temporal-Stage

The Temporal-stage consists of six time-dependent weights, which reflect the relative importance of the six feature groups at different game processes. Given the win-score vector $s(\mathbf{x}, t)$ at time-point t provided by the Spatial-stage (where vector \mathbf{x} represents the six feature groups), the Temporal-stage calculates the ultimate win prediction F^t using the linear combination of importance weights \mathbf{w}^t and win-scores $s(\mathbf{x}, t)$:

$$F^t = \mathbf{w}^t \cdot s(\mathbf{x}, t) = \sum_i^d w_i^t s_i(x_i, t)$$

where d denotes the number of feature groups. Since the weights \mathbf{w}^t represent the relative importance of feature groups at time-point t , we apply the *softmax* function to normalize the importance weight w_i^t for each feature group:

$$w_i^t = \frac{\exp \theta_i^t}{\sum_j \exp \theta_j^t},$$

so that the weight w_i^t satisfy:

$$\sum_i^d w_i^t = 1, w_i^t \geq 0.$$

4.4 Training

To optimize the parameters in the Spatial-stage and the Temporal-stage, we train the Spatial-models and importance weight vectors using cross-entropy loss and back-propagation technologies. By experiments, we find that there is little difference as to train the two stages simultaneously or separately. In the following experiments, we choose to train the two stages simultaneously.

5 EXPERIMENTS

5.1 Experimental Settings

We conduct experiments on the dataset mentioned above. 10,000 games from the dataset are randomly selected as the test set. 90% of the rest 174,362 games are set as the training set and the rest 10% as the validation set.

The parameters of the TSSTN model are as follows. In the Spatial-stage, the Spatial-models for numerical feature groups *Gold*, *Kill*, and *Tower* are logistic regression models with *tanh* as the non-linear function; the Spatial-models for other categorical groups *Wild Resource*, *Soldier*, and *Heroes* are two-hidden-layer feed-forward neural networks with dimensions (256, 16), (256, 16) and (128, 16), respectively. Before the input layer, the feature values (including time) are normalized using min and max values (for logistic regressions) or preprocessed into embedding vectors (for feed-forward networks) as the middle part of Figure 3 shows. For feed-forward network Spatial-models, after each hidden-layer, we use leaky *ReLU* function with parameter 0.01 as the non-linear function and add dropout layer with rate 0.2 to mitigate overfitting. After the output layers of the feed-forward network Spatial-models, we use *tanh* functions to rectify the Spatial-models' outputs (win-scores) to be among $[-1.0, 1.0]$ to represent win-or-lose likelihood.

5.2 Compared Methods

In order to thoroughly evaluate the aforementioned TSSTN model, we compare it with two baselines:

- **Heuristic:** Intuitively, "gold" is one of the most decisive features for the ultimate win predictions, so the *Heuristic* model predicts the game based on the difference of the accumulated gold between the two teams. The team with more gold will be predicted as the winner.

- **Fully-Connected:** A fully-connected neural network that takes all the six feature groups as the input. Before the input layer, the features are preprocessed in the same manner as the TSSTN model. We design four hidden layers for this model with dimensions 1024, 4096, 512 and 64, respectively. After each hidden layer, we add leaky *ReLU* function as the non-linear layer and add dropout layer in order to mitigate overfitting. After the output layer, a *tanh* function is used to give the ultimate win predictions. The settings of the leaky *ReLU* layers and dropout rates are identical to those of the TSSTN model introduced in Subsection 5.1.

Table 2: The accuracy (%) of the three prediction models at five equidistant time-points.

Models	0 min (std)	5 min (std)	10 min (std)	15 min (std)	20 min+ (std)
Heuristic	50.0 (0.00)	69.2 (0.00)	78.4 (0.00)	73.0 (0.00)	63.0 (0.00)
Fully-Connected	54.7 (0.43)	69.3 (0.23)	79.3 (0.12)	75.0 (0.23)	70.0 (0.57)
TSSTN	54.6 (0.36)	69.2 (0.05)	78.5 (0.05)	73.4 (0.09)	67.8 (0.32)

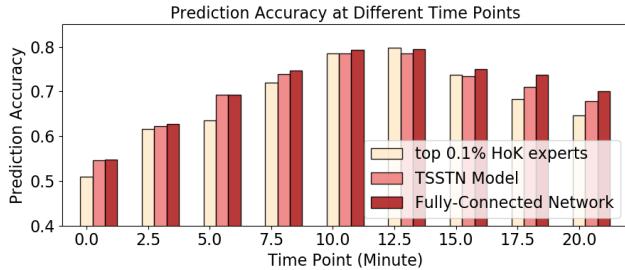


Figure 4: The average prediction accuracy of the three HoK experts and the two automatic prediction models at nine equidistant time-points.

The prediction accuracy of the single-feature-group based prediction models (Spatial-models, such as the prediction model depending on the “*Heroes*” features only) are elaborated in Subsection 5.5. These Spatial-models are separately discussed since they utilize less input information than the three aforementioned models.

5.3 Evaluation Metrics

The prediction accuracy at different game time-points is adopted as the automatic evaluation metrics. Although real-valued winning probabilities can be provided by the TSSTN model and the Fully-Connected Network, we only consider the prediction accuracy of the binary win-or-lose results for the test games. To better evaluate how well the proposed TSSTN model predicts the game-winner, we also recruit three human experts to manually predict the winner of each game given the test game data. All these experts rank top 0.1% in the ladder tournament of *HoK* according to the game leaderboard. The game experts are given access to the real games so they can explore the whole game states and extract their own features and conclusions, and are asked to predict the winners of the games every 2.5 minutes based on the battle situations and their experience. Note that since it is an impossible task to annotate all the 10,000 games in the test set manually due to the limitation of resources, we randomly choose 200 test games for each time-point for human annotation.

5.4 Results

The average prediction accuracy at five equidistant time-points is shown in Table 2. The Fully-Connected Network achieves the best performance in terms of the prediction accuracy at these five time-points. The prediction accuracy of the TSSTN model is higher than the Heuristic model but a little lower than the Fully-Connected Network, since we sacrifice the coupling information among the six feature groups to some extent for interpretability. The accuracy

of the Heuristic model at 0.0 minute is 50.0% since when the two teams have equal gold, the Heuristic model predicts the winner stochastically. Please note that human experts’ prediction results are not included in Table 2 due to the difference of the test sets (200 games versus 10,000). The comparison between *HoK* experts and the proposed TSSTN model is separately shown in Figure 4.

Figure 4 shows the comparisons of the prediction accuracy among human experts and two prediction models, one interpretable model TSSTN and one non-interpretable model Fully-Connected Network. Although the accuracy of the TSSTN model is slightly lower than that of the Fully-Connected Network, it is obviously higher than that of human experts at time-points 0.0, 17.5, and 20.0. Intuitively, predictions at these three time-points are difficult for human experts because many features that are decisive most of the time are not significant enough at these time-points. For example, “gold” is a decisive feature at most time-points. However, at the beginnings of the games (0.0 minute), the two teams have equal gold; and gold is no longer essential after 17.5 minutes because players already accumulated enough gold at that time.

At time-point 0.0 minute, the *HoK* experts appear to have low prediction accuracy, which is because: before the games start, human experts can only “guess” the results based on prior-game information like team compositions, which is quite inaccurate compared with the prediction results of the automatic methods.

As shown in Table 2 and Figure 4, the prediction accuracy of both the human experts and the automatic methods drops after 12.5 minutes, which is because: 1) In the late-game stages, both the levels and equipment of the two teams reach the maximum. Therefore the results of the games are more and more affected by random factors like the players’ accidental mistakes. This fact makes the late-stage games harder to predict. 2) Since the games are not equal-duration, games that are easier to predict often end before late-game stages, therefore the test data-frames are harder to predict at late-game stages time-points, resulting in this prediction accuracy drop.

5.5 Further Analysis

More information about the proposed TSSTN model can be revealed by the six Spatial-models’ individual prediction accuracy and the corresponding importance weights, as shown in Figure 6. At time-point 0.0 minute of the games, the only Spatial-model with a non-trivial (larger than 50%) prediction accuracy is Spatial-model *Heroes*; accordingly, the only non-zero importance weight is also *Heroes*, as shown in the right part of Figure 6. As the games go on, the most accurate Spatial-model is *Gold*, which is also reflected in its high importance weights. After 12.0 minutes in the games, both the prediction accuracy and importance weight of *Gold* begin to drop. This phenomenon might happen because extra gold above some certain threshold becomes useless due to the limited package space for equipment in the late-game stages. After 20.0 minutes in the games, the prediction accuracy of the Spatial-model *Soldier* surpasses that of the Spatial-model *Gold*, so is its corresponding importance weight.

The six Spatial-models’ importance weights and prediction accuracy changes are consistent with our intuition. For example, since the team composition information (*Heroes*) is fixed throughout each

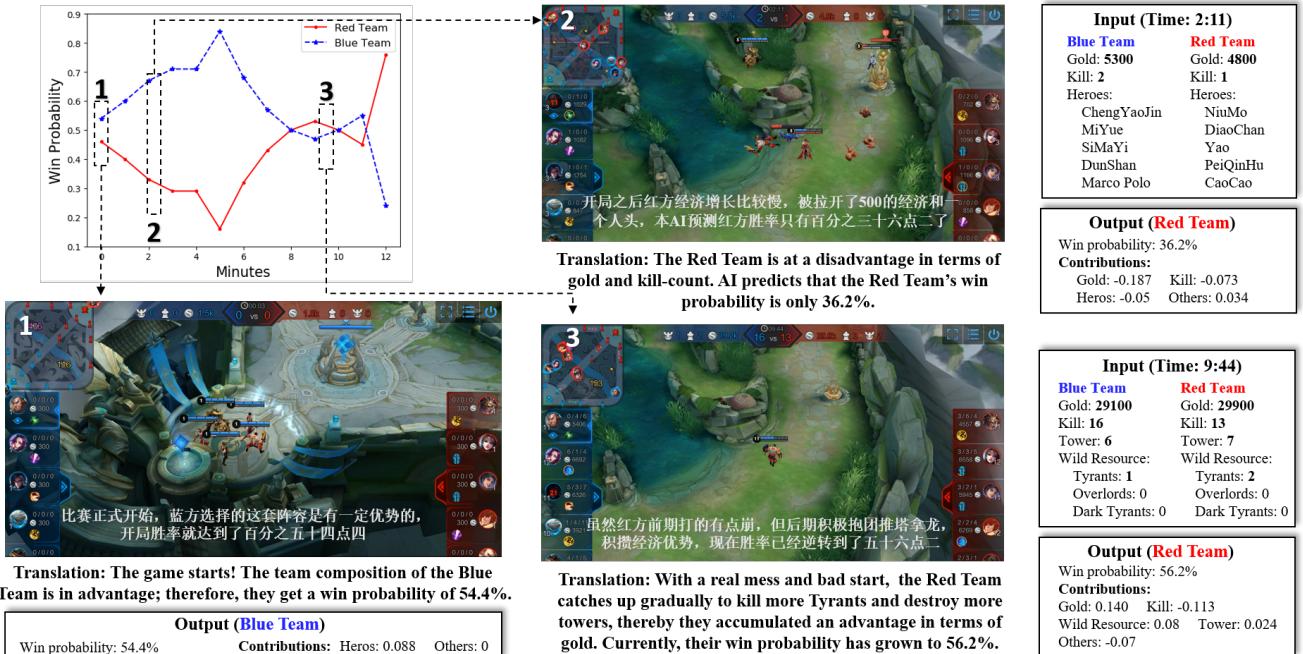


Figure 5: An example *HoK* game in which an AI commentator system gives real-time comments as the game progresses. Among these comments, the win prediction related ones are supported by the proposed TSSTN model. The upper left part of this figure shows the win probability curves of the Blue Team and the Red Team throughout the game. The lower left, upper right and lower right parts show three screenshots in which the AI commentator system utilizes the interpretable intermediate results of the proposed TSSTN model to generate its comments.

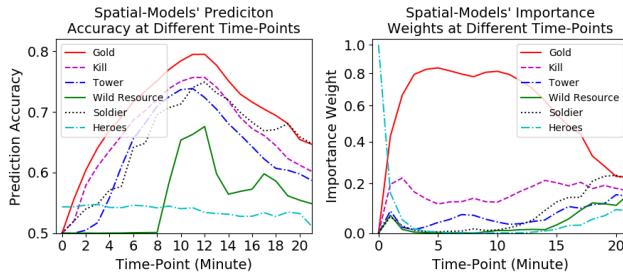


Figure 6: Six Spatial-models' average prediction accuracy and importance weights in the first 20 minutes of the games.

game, the prediction accuracy of the Spatial-model *Heroes* is almost impervious to time, as the left part of Figure 6 shows. Moreover, since the difference in team compositions has relatively limited influence on the game results, the corresponding prediction accuracy of Spatial-model *Heroes* is only slightly above 50.0%. The Spatial-model *Wild Resource* only becomes valid after 8.0 minutes in the games, since its features “Overlord” and “Dark Tyrant” only change after 8.0 and 10.0 minutes, respectively. The Spatial-model *Soldier* (soldiers’ distances to the rival Crystal) becomes more significant after 19.0 minutes compared to other Spatial-models, since soldiers become more and more potent and important in the late-game stages in most MOBA esports, especially *HoK*.

5.6 Interpretability

The proposed TSSTN model now serves as an essential module of an AI commentator system⁴ for *HoK*. Having been deployed for two months (since April 2020), this AI commentator can automatically generate real-time comments for *HoK* games, and a large part of its comments rely on the interpretable prediction results of the proposed TSSTN model. To illustrate the interpretability of the proposed TSSTN model, we exhibit a live-streaming game as an example, as Figure 5 shows.

Specifically, the upper left part of this figure shows two real-time win probability curves for the two teams provided by the TSSTN model. Then the screenshots of three time-points in the live game are exhibited in the lower left, upper right and lower right parts, respectively. In the screenshots, the Chinese subtitles in white are real comments generated by the aforementioned *HoK* AI commentator system, and the corresponding English translations are provided below. At time-point 1 (game time 0:03), since it is the beginning of the game, the TSSTN model predicts that the Blue Team’s win probability is 54.4% based on the team composition (*Heroes*) information only, so the AI commentator generates a comment “*The game starts! The team composition of the Blue Team is in advantage; therefore, they get a win probability of 54.4%*”. Then, at time-point 2

⁴ A live-streaming video record of this system can be found at <https://www.bilibili.com/video/BV1sK411W7JH>, and its English-subtitled record version can be found at https://drive.google.com/drive/folders/1oYT8DDIH0cA7_OXdyr4X3ErNDJXFN734?usp=sharing. Our module works at game time 3:57, 5:04, and 8:25 in this record.

(game time 2:11), due to the disadvantages in *Gold* and *Kill*, the Red Team's win probability drops to 36.2%, and the contributions of feature groups "Gold" and "Kill" to the win prediction are -0.187 and -0.073, respectively. So the AI commentator generates a comment "*The Red Team is at a disadvantage in terms of gold and kill-count. AI predicts that the Red Team's win probability is only 36.2%*". Finally, at time-point 3 (game time 9:44), the Red Team reverses the win probability to 56.2%. This prediction is made based mainly on the difference of "Gold", "Wild Resource", and "Tower" between the two teams, so the AI generates the comment "*With a real mess and bad start, the Red Team catches up gradually to kill more Tyrants and destroy more towers, thereby they accumulate an advantage in terms of Gold. Currently, their win probability has grown to 56.2%*".

Obviously, without the interpretable results, commentators can only make some trivial comments without any attraction to the audience. For example, at time-point 3, one can only comment "*Now the Red team reverses its situation and has a win probability of 56.2%*", which is less informative than the interpretable one made by the AI commentator with the help of the TSSTN model. Currently, the AI commentator generates 157.2 comments per game on average, and a large part of them depend on the proposed TSSTN model with a relatively even distribution over the six feature groups. This is a very significant characteristic that makes our AI commentator system different from other non-interpretable-prediction based systems.

6 CONCLUSION

In this paper, we propose to predict the results of MOBA esports games in an interpretable way. A large-scale *HoK* dataset which contains abundant real-time MOBA game records is collected and released to facilitate this study. Based on this dataset, we further propose a Two-Stage Spatial-Temporal Network (TSSTN) that can give interpretable intermediate results as well as reliable ultimate win predictions. The core idea of this model structure is to separate the effects of features' value differences and features' relative importance in order to decouple the contributions of different features. Our interpretable results can be utilized in various scenarios and promote the development of related industries. For example, the proposed TSSTN model has already been implemented in an AI commentator system for *HoK* and achieves good performance. Our next goal is to construct automatic metrics to quantitatively evaluate the competence of different interpretable methods for MOBA esports win predictions. Further research can be done on improving the prediction accuracy and exploring the applications of interpretable prediction models in different industries.

REFERENCES

[1] Aniket Bhawkar, Bhumi Patel, and Prasad Mahajan. Predicting the winner of Indian Premier League match: A Comparative Study. (????).

[2] Zhengxing Chen, Yuyu Xu, Truong-Huy D Nguyen, Yizhou Sun, and Magy Seif El-Nasr. 2018. Modeling Game Avatar Synergy and Opposition through Embedding in Multiplayer Online Battle Arena Games. *arXiv preprint arXiv:1803.10402* (2018).

[3] Kevin Conley and Daniel Perry. 2013. How does he saw me? a recommendation engine for picking heroes in dota 2. *Np, nd Web* 7 (2013).

[4] Dursun Delen, Douglas Cogdell, and Nihat Kasap. 2012. A comparative analysis of data mining methods in predicting NCAA bowl outcomes. *International Journal of Forecasting* 28, 2 (2012), 543–552.

[5] Simon Demediuk, Peter York, Anders Drachen, James Alfred Walker, and Florian Block. 2019. Role Identification for Accurate Analysis in Dota 2. In *Proceedings of the AAAI Conference on Artificial Intelligence and Interactive Digital Entertainment*, Vol. 15, 130–138.

[6] Victoria Hodge, Sam Devlin, Nicholas Sephton, Florian Block, Peter Cowling, and Anders Drachen. 2019. Win Prediction in Multi-Player Esports: Live Professional Match Prediction. *IEEE Transactions on Games* (2019).

[7] Victoria Hodge, Sam Devlin, Nicholas Sephton, Florian Block, Anders Drachen, and Peter Cowling. 2017. Win prediction in esports: Mixed-rank match prediction in multi-player online battle arena games. *arXiv preprint arXiv:1711.06498* (2017).

[8] Daniel R Jiang, Emmanuel Ekwedike, and Han Liu. 2018. Feedback-based tree search for reinforcement learning. *arXiv preprint arXiv:1805.05935* (2018).

[9] K Kalyanaraman. 2014. *To win or not to win? A prediction model to determine the outcome of a DotA2 match*. Technical Report. Technical report, University of California San Diego.

[10] Adam Katona, Ryan Spick, Victoria Hodge, Simon Demediuk, Florian Block, Anders Drachen, and James Alfred Walker. 2019. Time to Die: Death Prediction in Dota 2 using Deep Learning. *arXiv preprint arXiv:1906.03939* (2019).

[11] Varol Onur Kayhan and Alison Watkins. 2018. A data snapshot approach for making real-time predictions in basketball. *Big data* 6, 2 (2018), 96–112.

[12] Varol Onur Kayhan and Alison Watkins. 2019. Predicting the point spread in professional basketball in real time: a data snapshot approach. *Journal of Business Analytics* 2, 1 (2019), 63–73.

[13] Nicholas Kinkade, L Jolla, and K Lim. 2015. Dota 2 win prediction. *Univ Calif 1* (2015), 1–13.

[14] Carson K Leung and Kyle W Joseph. 2014. Sports data mining: predicting results for the college football games. *Procedia Computer Science* 35 (2014), 710–719.

[15] Ilya Makarov, Dmitry Savostyanov, Boris Litvyakov, and Dmitry I Ignatov. 2017. Predicting Winning Team and Probabilistic Ratings in fiDota 2fi and fiCounter-Strike: Global Offensivefi Video Games. In *International Conference on Analysis of Images, Social Networks and Texts*. Springer, 183–196.

[16] OpenAI. 2018. OpenAI Five. <https://blog.openai.com/openai-five/>. (2018).

[17] Aleksandr Semenov, Peter Romov, Sergey Korolev, Daniil Yashkov, and Kirill Neklyudov. 2016. Performance of machine learning algorithms in predicting game outcome from drafts in Dota 2. In *International Conference on Analysis of Images, Social Networks and Texts*. Springer, 26–37.

[18] Kai Song, Yiran Gao, and Jian Shi. 2020. Making real-time predictions for NBA basketball games by combining the historical data and bookmakerfs betting line. *Physica A: Statistical Mechanics and its Applications* (2020), 124411.

[19] Kuangyan Song, Tianyi Zhang, and Chao Ma. 2015. *Predicting the winning side of DotA2*. Technical Report. Technical report, Stanford University.

[20] Peng Sun, Xinghai Sun, Lei Han, Jiechao Xiong, Qing Wang, Bo Li, Yang Zheng, Ji Liu, Yongshe Liu, Han Liu, and others. 2018. Tstarbots: Defeating the cheating level builtin ai in starcraft ii in the full game. *arXiv preprint arXiv:1809.07193* (2018).

[21] C Soto Valero. 2016. Predicting Win-Loss outcomes in MLB regular season games—A comparative study using data mining methods. *International Journal of Computer Science in Sport* 15, 2 (2016), 91–112.

[22] Nanzhi Wang, Lin Li, Linlong Xiao, Guocai Yang, and Yue Zhou. 2018. Outcome prediction of DOTA2 using machine learning methods. In *Proceedings of 2018 International Conference on Mathematics and Artificial Intelligence*. ACM, 61–67.

[23] Tian Wang. 2018. Predictive Analysis on eSports Games: A Case Study on League of Legends (LoL) eSports Tournaments. (2018).

[24] Wikipedia. 2019. Honor of Kings – Wikipedia, The Free Encyclopedia. https://en.wikipedia.org/wiki/Honor_of_Kings [Online; accessed 15-November-2019].

[25] Yifan Yang, Tian Qin, and Yu-Heng Lei. 2016. Real-time esports match result prediction. *arXiv preprint arXiv:1701.03162* (2016).

[26] Deheng Ye, Zhao Liu, Mingfei Sun, Bei Shi, Peilin Zhao, Hao Wu, Hongsheng Yu, Shaojie Yang, Xipeng Wu, Qingwei Guo, Qiaobo Chen, Yinyuting Yin, Hao Zhang, Tengfei Shi, Liang Wang, Qiang Fu, Wei Yang, and Lanxiao Huang. 2019. Mastering Complex Control in MOBA Games with Deep Reinforcement Learning. (2019). *arXiv:arXiv:1912.09729*

[27] Zhijian Zhang, Haozheng Li, Luo Zhang, Tianyin Zheng, Ting Zhang, Xiong Hao, Xiaoxin Chen, Min Chen, Fangxu Xiao, and Wei Zhou. 2019. Hierarchical Reinforcement Learning for Multi-agent MOBA Game. *arXiv preprint arXiv:1901.08004* (2019).