

EEGUnity: Open-Source Tool in Facilitating Unified EEG Datasets Towards Large-Scale EEG Model

Chengxuan Qin ^{*1,2}, Rui Yang ^{†1}, Wenlong You^{1,2}, Zhige Chen³, Longsheng Zhu^{1,2}, Mengjie Huang⁴, and Zidong Wang⁵

¹School of Advanced Technology, Xi'an Jiaotong-Liverpool University, Suzhou, 215123, China

²School of Electrical Engineering, Electronics and Computer Science, University of Liverpool, Liverpool, L69 3BX, United Kingdom

³Department of Computing, The Hong Kong Polytechnic University, Hong Kong, SAR

⁴Design School, Xi'an Jiaotong-Liverpool University, Suzhou, 215123, China

⁵Department of Computer Science, Brunel University London, Uxbridge, Middlesex, UB8 3PH, United Kingdom

October 11, 2024

Abstract

The increasing number of dispersed EEG dataset publications and the advancement of large-scale Electroencephalogram (EEG) models have increased the demand for practical tools to manage diverse EEG datasets. However, the inherent complexity of EEG data, characterized by variability in content data, metadata, and data formats, poses challenges for integrating multiple datasets and conducting large-scale EEG model research. To tackle the challenges, this paper introduces EEGUnity, an open-source tool that incorporates modules of “EEG Parser”, “Correction”, “Batch Processing”, and “Large Language Model Boost”. Leveraging the functionality of such modules, EEGUnity facilitates the efficient management of multiple EEG datasets, such as intelligent data structure inference, data cleaning, and data unification. In addition, the capabilities of EEGUnity ensure high data quality and consistency, providing a reliable foundation for large-scale EEG data research. EEGUnity is evaluated across 25 EEG datasets from different sources, offering several typical batch processing workflows. The results demonstrate the high performance and flexibility of EEGUnity in parsing and data processing. The project code is publicly available at github.com/Baizhige/EEGUnity.

Keywords: Brain-Computer-Interface, Electroencephalogram Data Integration, Large-Scale Model, Open-Source Software

^{*}C.Qin8@liverpool.ac.uk

[†]Corresponding author: R.Yang@xjtlu.edu.cn

¹This research has been approved by University Ethics Committee of Xi'an Jiaotong-Liverpool University with proposal number EXT20-01-07 on March 31 2020, and is partially supported by: National Natural Science Foundation of China (72401233), Jiangsu Provincial Qinglan Project, Natural Science Foundation of the Jiangsu Higher Education Institutions of China (23KJB520038), and Research Enhancement Fund of XJTLU (REF-23-01-008).

1 Introduction

Brain-computer interfaces (BCI) are really pushing the limits, being able to record over not just days, weeks, but months, years at a time [27]. The proposal of BCI systems has encouraged many researchers to actively explore brain signals and apply BCI systems in various fields: game interaction entertainment, robot control, emotion recognition, fatigue detection, sleep quality assessment, and clinical fields [2, 10, 28, 34, 36, 40]. With the increasing exploration of BCI systems, the demand for neuro-monitoring capabilities has significantly increased. EEG is applied in various BCI systems to collect active electrical signals from the brain. To meet diverse requirements, numerous EEG-based BCI system paradigms have been proposed [1]. The paradigms allow for the selection of an appropriate approach to gather extensive brain electrical signals to form EEG datasets that provide foundational knowledge of specific patterns in the brain [33, 48].

In recent years, there has been a marked increase in both the quantity and demand for EEG data publications. On the one hand, online databases such as Zenodo [7] and PhysioNet [8] have a vast and growing collection of diverse EEG datasets. On the other hand, a study [15] on large EEG models employing over 20 datasets demonstrates the ever-increasing need to process large-scale EEG data. Nevertheless, the inherent characteristics of EEG data present a challenge in data processing [20, 49]. The challenge is primarily attributed to three key factors:

- **Differences in content data:** Variations in the configuration of electrodes, characteristics of the sensor, and circuit structures can lead to significant differences in the dimensions and distribution of EEG data [29, 42, 43];
- **Differences in metadata:** Variations in the la-

beling criteria for metadata (such as channel names and events annotation), along with the absence or errors in standard information, can lead to inconsistencies in annotation [9];

- **Differences in data formats:** Variations in data formats (such as gdf, edf, mat, csv, txt) complicate the standardization and processing steps of data, demonstrating that the processing pipeline must be tailored for each study [9, 30].

The challenges above indicate an urgent need for an efficient large-scale EEG data management tool to simplify data standardization and processing steps, eventually improving data processing efficiency. Table 1 summarizes highly integrated EEG data processing tools, covering their openness and supported platforms. Various EEG data processing tools with comprehensive functionality are widely used in multiple EEG research. Some of the common open-source tools include SPM [22], EEGLAB [4], FieldTrip [30], Brainstorm [35], and MNE-Python [9], offering flexible and powerful analysis capabilities to meet diverse research needs. Additionally, commercial software such as NeuroScan CURRY [39] and BESA [17] are also available.

Despite the significant advantages in functionality and broad applicability offered by existing tools, the tools listed in Table 1 exhibit shortcomings when handling large-scale data. Specifically, the existing tools offer flexible processing for individual datasets, but lack specialized management methods to simultaneously handle multiple datasets with varying content data, metadata, and formats. Therefore, current tools are limited in effectively managing and analyzing heterogeneous EEG data from various sources. As the quantity and demand for EEG datasets continue to increase, the shortcomings become particularly evident, affecting research efficiency and the reliability of results. Therefore, an urgent need is to enhance EEG data processing capability for handling large-scale EEG data.

In this paper, a novel EEG data processing tool named EEGUnity is proposed, aiming to unify diverse EEG datasets from all over the world, as reflected in its name. As illustrated in Fig. 1, the objective of EEGUnity is to manage multiple datasets, efficiently process large-scale data, and enhance data processing efficiency. The introduction of EEGUnity addresses the limitations of existing tools in handling large-scale EEG data and provides a new approach to the unified management and processing of EEG data. EEGUnity offers several innovative features: (1) intelligent data structure inference technology to address the challenge of data heterogeneity; (2) a user-friendly interface for reviewing and modifying EEG dataset annotations to ensure accurate analysis; (3) a comprehensive and unified interface for large-scale data processing to establish a solid foundation for subsequent analyses. These features allow EEGUnity to effectively manage and process heterogeneous EEG data from different sources, enhancing data consistency and comparability.

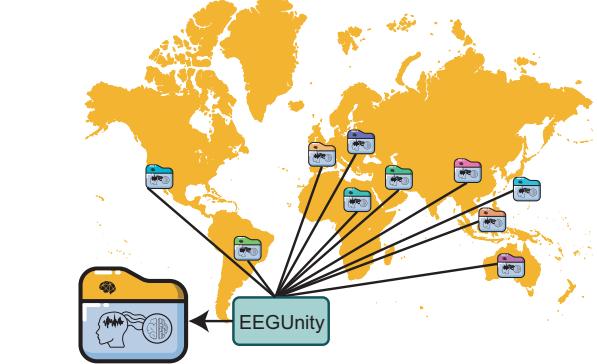


Figure 1: Objective of Proposed EEGUnity.

Based on the above discussions, the main contributions of this paper can be summarized as follows:

- The proposal of a new concept for efficiently managing and processing large-scale EEG data through a unified platform;
- The proposal of EEGUnity, a tool specifically designed for EEG data processing, supporting the management of multiple datasets, thereby addressing the challenges of data heterogeneity;
- The intelligent integration of features into EEG Unity, including data structure inference, correction, cleaning, and unification, ensuring high data quality and consistency, thereby providing a reliable data foundation for EEG research.

The remaining structure of this paper is arranged as follows: Section 2 provides a detailed introduction to EEGUnity, including overview and implementation details, giving readers comprehensive background information about the tool. Section 3 demonstrates several typical batch process workflows of EEGUnity, such as dataset management, data correction, data cleaning, and data unification, through specific use cases, helping readers understand the practical application of the tool. Section 4 comprehensively analyzes the advantages and limitations of EEGUnity in practical applications, and Section 5 concludes this paper and proposes future research directions.

2 Introducing EEGUnity: Overview and Implementation

In this section, an overview of EEGUnity is initially presented, including the implementation platform, components, usage, and innovative features. Subsequently, the architectural design of two core components of EEGUnity, `UnifiedDataset` and `Locator`, is detailed.

Table 1: Overview of Commonly Used EEG Data Processing Software.

Tool	Openness	Platform
SPM [22]	open source	MATLAB
EEGLAB [4]	open source	MATLAB
FieldTrip [30]	open source	MATLAB
Brainstorm [35]	open source	MATLAB
MNE-Python [9]	open source	Python
NeuroScan CURRY [39]	commercial	Windows
BESA [17]	commercial	Windows

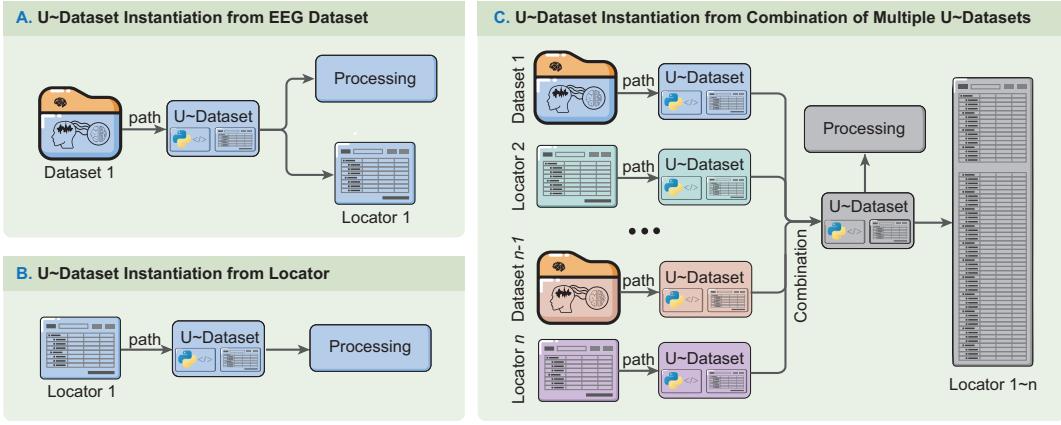


Figure 2: Three Approaches for Managing Datasets in EEGUnity. “U~Dataset” refers to `UnifiedDataset`.

2.1 Overview of EEGUnity

EEGUnity is currently a Python package focused on managing multiple EEG datasets. The EEGUnity package includes a core Python class—`UnifiedDataset`, along with functions for creating, modifying, and merging on the `UnifiedDataset`. The Python class `UnifiedDataset` is designed to provide a unified interface for different operations to datasets. Users can efficiently manage multiple datasets through `UnifiedDataset`, thereby gaining the capability to handle large-scale EEG data.

The usage for managing datasets in EEGUnity is very convenient, following a two-step process: 1) instantiating a `UnifiedDataset`; 2) performing batch processing based on the `UnifiedDataset`. There are three approaches for managing datasets in EEGUnity, as shown in Fig. 2:

- The first approach is illustrated in Fig. 2A. EEGUnity supports the instantiation of `UnifiedDataset` by providing an accessible path to EEG dataset for the initial accessing. After instantiating the `UnifiedDataset`, users can utilize the interface of `UnifiedDataset` for batch processing or export a `Locator`, which is a file recording the essential metadata that required to access the dataset, while parser processes are automatically employed by `UnifiedDataset`.
- The second approach is illustrated in Fig. 2B. EEGUnity supports the instantiation of `UnifiedDataset` by utilizing a pre-existing `Locator`. If the dataset referenced by the `Locator` remains accessible on the user’s system, the resulting `UnifiedDataset` instance is equivalent to one that would have been instantiated directly via an EEG dataset address. This design allows users to quickly reload a dataset and save any modification made to the metadata.
- The third approach is illustrated in Fig. 2C. EEGUnity supports the instantiation of `UnifiedDataset` by integrating multiple `UnifiedDataset` instances, thereby allowing users to effectively manage multiple datasets according

to specific requirements.

Compared to other processing tools, EEGUnity offers the following innovative features:

- **Data Scale Capabilities:** EEGUnity is designed to process large-scale EEG datasets, supporting the integration of multiple datasets and large-scale data operations;
- **Functional Scope:** EEGUnity processes diverse functions for data cleaning, data correction, data unification, and custom batch processing operations, significantly improving EEG data processing efficiency;
- **Compatibility and Flexibility:** EEGUnity supports intelligent data structure inference using pre-set code and large language models (LLM), enhancing the flexibility and accuracy of data processing.

2.2 Implementation Details of `UnifiedDataset`

In EEGUnity, the parser for EEG data and the unified interface are integrated within a Python class `UnifiedDataset`. `UnifiedDataset` includes a comprehensive set of methods and attributes to provide a unified interface, as shown in Fig. 3. The functions can be categorized into four modules:

- **EEG parser module:** This module facilitates the intelligent parsing of EEG data across diverse formats, including but not limited to edf, gdf, mat, txt, and csv. The EEG data files are initially processed using standard readers, such as parser functions in MNE-Python. If standard readers are insufficient, non-standard readers are employed, which are boosted by pre-defined code and another module in EEGUnity—large language model boost module;
- **Correction module:** This module offers a user-friendly interface to facilitate the correction of dataset annotations. On the one hand, the module allows users to visually inspect and modify annotations within a spreadsheet-like environment. On the other hand, the module provides several correction methods, by built-in functions and the large language model boost module, to systematically review and refine dataset annotations.

- **Batch processing interface module:** This module provides batch processing functionality. On the one hand, this module enables users to customize batch processing pipelines according to specific needs. On the other hand, this module includes a variety of built-in functions for EEG data processing, such as data cleaning, denoising, quality assessment, channel alignment, and standardization.
- **Large language model boost module:** This module enhances the capabilities of other modules within **UnifiedDataset** by leveraging existing large language models, such as ChatGPT. This module enables advanced functionalities, including intelligent data parsing and the extraction of channel names and sampling rates from given descriptive files.

2.3 Implementation Details of Locator

In the design of EEGUnity, a critical component supporting the functionality of EEGUnity is the **Locator**. During the instantiation of **UnifiedDataset**, attributes for each EEG data file are stored in the **Locator**, which is structured using a **DataFrame** from the Pandas package—a widely adopted Python library for data science applications [24]. The attributes within the **Locator** are categorized into basic and advanced attributes for each data file:

- **Basic attributes** include file path, domain tag, file type, EEG channel configuration, sampling rate, duration, and completeness check;
- **Advanced attributes** are linked to specific sub-modules for functionalities such as data quality scoring. Advanced attributes can be added by subsequent community developers or customized according to user requirements.

Based on the design of **Locator**, users can calibrate the dataset by visually inspecting and modifying the **Locator** file in a spreadsheet-like environment, either programmatically or manually. The metadata specified by the **Locator** takes precedence over those in source data. In such a design, EEGUnity allows users to quickly correct metadata through the locator without modifying the source files.

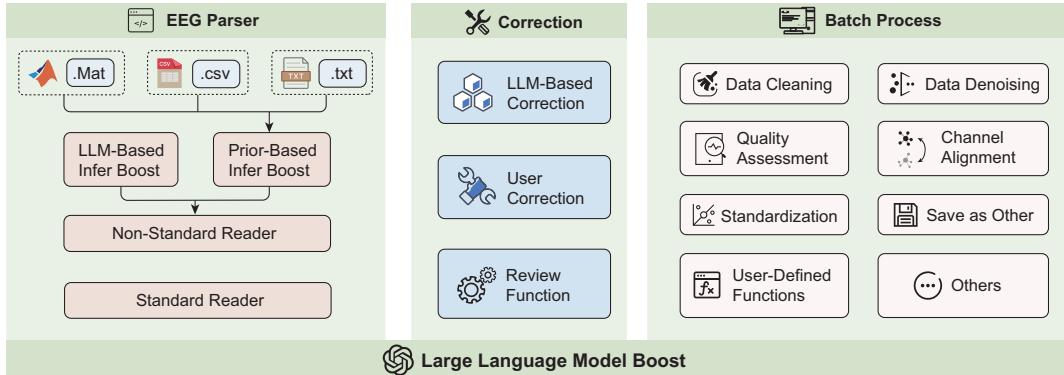


Figure 3: Structure of the **UnifiedDataset**.

3 Typical Batch Processing Workflow in EEGUnity

This section introduces typical batch processing workflows in EEG data processing, including dataset management, data correction, data cleaning, and data unification. The described typical batch processing workflows comprise multiple functions of EEGUnity and are not fixed pipelines. Users can customize the pipelines according to specific requirements. Table 2 lists the datasets used in this study.

Table 2: Datasets Used in This Study.

File Name	Paradigms	Total Hours
zenodo-saa [6]	audio attention	15
tuh-eeg-seizure [14]	annotations about seizures	1473.6
tuh-eeg-events [14]	annotations about epilepsy	148.7
tuh-eeg-artifact [14]	artifacts annotations	100
tuh-eeg-abnormal [14]	normal or abnormal	1137.3
tuh-eeg [14]	clinical EEG recordings	27065
physionet-sleepedfx [19]	sleep patterns	3849.1
physionet-eegmmidb [31]	motor imagery	48.5
physionet-eegmat [46]	mental arithmetic	2.4
physionet-chbmit [11]	intractable seizures	1061
physionet-capslodb [38]	cyclic alternating pattern	1004
other-seed [45]	various	172.3
other-openbmi [21]	various	43.0
other-migrainedb [44]	migraine	21.2
other-highgammadata [32]	motor imagery	28.7
openneuro-ds004015 [13]	audio attention	47.3
openneuro-ds003516 [12]	audio attention	22.6
figshare-stroke [23]	motor imagery	4.4
figshare-shudb [16]	motor imagery	24.8
figshare-meng2019 [25]	motor imagery	49.6
figshare-largemi [18]	motor imagery	70.2
bcic-iv-2b [37]	motor imagery	26.3
bcic-iv-2a [37]	motor imagery	13.4
bcic-iv-1 [37]	motor imagery	3.7
bcic-iii-1 [3]	motor imagery	0.3

3.1 Datasets Management

EEGUnity offers three primary approaches when initiating the processing of one or multiple EEG datasets: (1) specifying the path to an available dataset; (2) specifying the path to an available locator; (3) integrating multiple datasets. The detailed implementation for each approach is provided in Table 3.

3.2 Data Correction

EEGUnity supports data correction for one or multiple EEG datasets, including a user-friendly interface

Table 3: Implementation of Three Approaches for Managing Datasets in EEGUnity.

```

1 # Dataset Management Implementation in EEGUnity
2 # -----
3 # This script demonstrates three approaches to
4 # instantiate and manage EEG datasets using
5 # EEGUnity toolkit. The script sequentially
6 # implements the following functions:
7 # 1. Instantiate a UnifiedDataset by providing an
8 # accessible EEG dataset address.
9 # 2. Export a Locator that records metadata for
10 # dataset.
11 # 3. Instantiate a UnifiedDataset by providing a
12 # Locator.
13 # 4. Instantiate UnifiedDataset by integrating
14 # multiple UnifiedDataset instances.
15 # 5. Combine multiple datasets together.
16 # Example:
17 >>> from eegunity import UnifiedDataset, con_udatasets
18 # Approach (1) - Instantiate UnifiedDataset by
19 # providing an accessible EEG dataset address.
20 >>> unified_dataset = UnifiedDataset(domain_tag="dataset_demo", dataset_path='path/dataset')
21 >>> unified_dataset.save_locator('path/to/locator')
22 # Approach (2) - Instantiate UnifiedDataset by
23 # providing a Locator.
24 >>> unified_dataset = UnifiedDataset(domain_tag="dataset_demo", locator_path='path/locator')
25 # Approach (3) - Instantiate UnifiedDataset by
26 # integrating multiple UnifiedDataset instances.
27 >>> unified_dataset_1 = UnifiedDataset(domain_tag="dataset_1", locator_path='path/locator1')
28 >>> unified_dataset_2 = UnifiedDataset(domain_tag="dataset_2", dataset_path='path/dataset2')
29 >>> unified_dataset_list = [unified_dataset_1,
30 >>> unified_dataset_2]
31 >>> combined_datasets = con_udatasets(
32 >>> unified_dataset_list)

```

for inspecting, modification, diagnosis, and visualization for dataset integrity. The implementation details of the aforementioned functions are outlined in Table 4 and elaborated below:

- **Interface for reviewing and modification:** EEGUnity stores metadata in the Locator, which users can easily review and modify using tools like PyCharm, Microsoft Excel, and Pandas;
- **Dataset diagnosis:** EEGUnity supports dataset diagnosis through built-in functions that generate detailed dataset reports, including the ratio of file types, domain tags, channel configurations, sampling rates, and completeness checks;
- **Dataset visualization:** EEGUnity includes built-in functions to visualize datasets, such as displaying magnitude-frequency curves for alpha, beta, theta, and gamma waves and channel correlations for each data. Two visualization results are shown in Fig. 4 and Fig. 5.

3.3 Data Cleaning

EEGUnity supports data cleaning for one or multiple EEG datasets, with the detailed implementation outlined in Table 5. The suggested data cleaning process is divided into the following steps:

- **Data completeness check:** EEGUnity classifies the completeness of EEG data into three levels and records the results in basic attributes of the Locator: (1) completed, indicating that the data includes the original EEG sequence and all basic attributes in the Locator have been correctly parsed; (2) acceptable, indicating that further parsing of

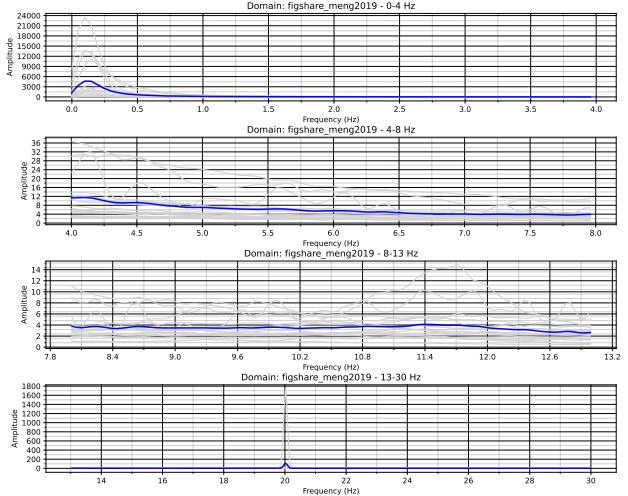


Figure 4: Frequency Visualization Results of Correction Module. The figure displays magnitude-frequency curves across four subfigures, with each subfigure corresponding to one of the frequency bands: alpha, beta, theta, and gamma. The samples visualized are randomly selected within a domain specified by a “domain tag”. The average curve for each band is represented in blue, while individual curves for each data sample are depicted in grey.

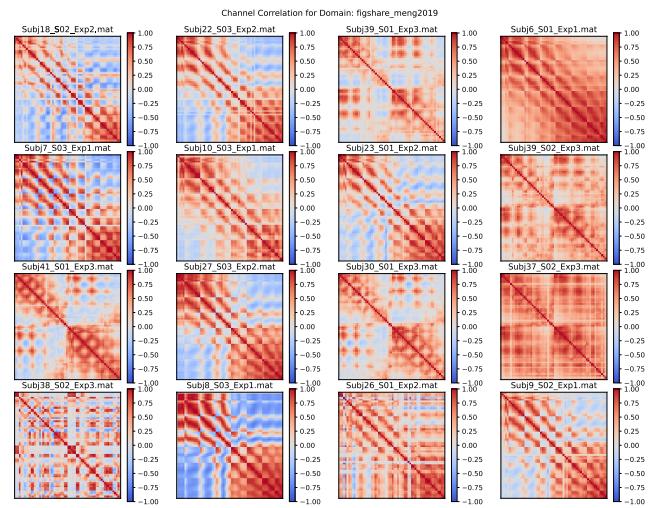


Figure 5: Channel Correlation Visualization Results of Correction Module. The figure presents channel correlation for samples that are randomly selected within a domain identified by a “domain tag”. The number of samples to be visualized is adjustable via a parameter. Subfigure placement is automatically optimized for ease of review. This figure allows users to inspect specific aspects of the samples, such as low-frequency noise or channel noise, facilitating a detailed analysis [50].

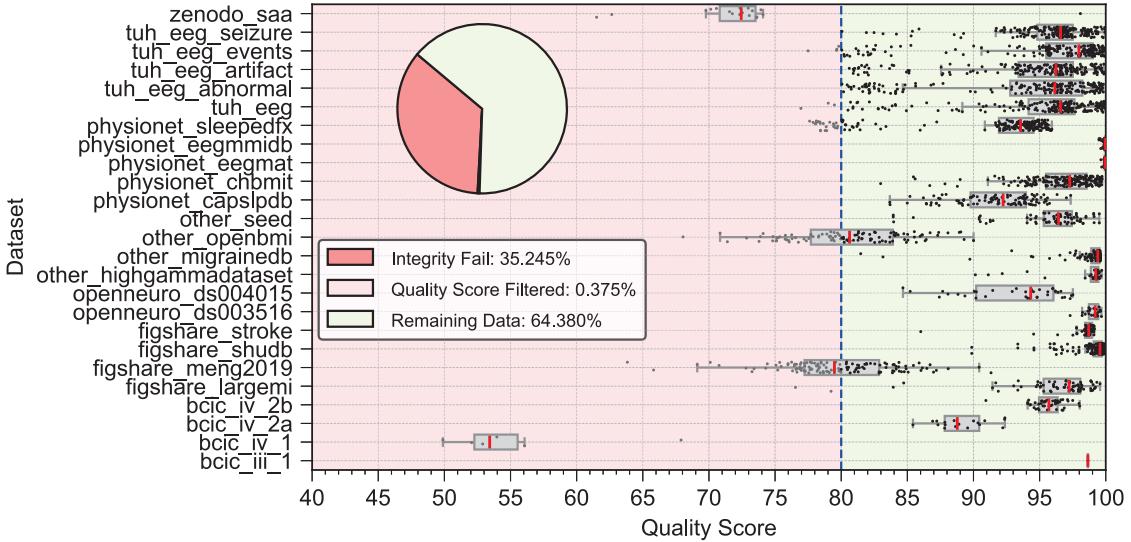


Figure 6: A Statistical Result of Data Integrity Checks and Quality Assessments for Filtering. The figure illustrates the results of sample filtering using two types of charts: a pie chart and a box plot. The pie chart displays the proportion of data filtered by completeness (i.e., fully completed data) and quality (i.e., data with scores above 80), along with the proportion of the remaining data. The pie chart provides an overview for users to understand the extent of data retained after filtering. The box plot shows the distribution of scores across various datasets. The red line within each box plot represents the median score, while individual dots around the box represent the scores of specific data points, with the maximum number of dots adjustable via parameters. These dots provide insight into the score distribution within each dataset.

Table 4: Implementation for Diagnosing and Visualizing Datasets in EEGUnity.

```

1 # Diagnosing and Visualizing Datasets in EEGUnity
2 # -----
3 # This script demonstrates how to diagnose and
4 # visualize EEG datasets using the EEGUnity toolkit
5 # . The script sequentially implements the
6 # following functions:
7 # 1. Instantiate a UnifiedDataset by providing an
8 # accessible EEG dataset address.
9 # 2. Generate and display a report summarizing EEG
10 # dataset.
11 # 3. Visualize the frequency spectrum of EEG signals
12 # for a subset of samples.
13 # 4. Visualize the correlation between EEG channels
14 # for a subset of samples.
15 # Example:
16 >>> from eegunity import UnifiedDataset
17 >>> unified_dataset = UnifiedDataset(domain_tag='',
18 # dataset1', dataset_path='path/to/dataset')
19 >>> unified_dataset.eeg_correction.report()
20 >>> unified_dataset.eeg_correction.
21 # visualization_frequency(max_sample=10)
22 >>> unified_dataset.eeg_correction.
23 # visualization_channels_corr(max_sample=16)

```

EEG information may affect the accuracy of analyses; (3) unavailable: indicating the original EEG sequence is unavailable or any basic attributes in the Locator cannot be filled. Based on data completeness check, quality assessment, and sample filtering, a statistical result for multiple datasets is presented in Fig. 6.

- **Quality assessment:** EEGUnity is capable of supporting established methodologies [26] to comprehensively assess the quality of EEG data. The assessment results are presented as scores ranging from 0 to 100 and recorded in the advanced attributes of the Locator for future analysis.
- **Sample filtering:** EEGUnity supports filtering the data based on the attributes in the Locator to

Table 5: Implementation for Data Cleaning in EEGUnity.

```

1 # Data Cleaning Implementation in EEGUnity
2 # -----
3 # This script demonstrates the process of cleaning EEG
4 # data using the EEGUnity toolkit. The script
5 # sequentially implements the following functions:
6 # 1. Instantiate a UnifiedDataset object.
7 # 2. Filter EEG samples based on completeness.
8 # 3. Save the dataset state after filtering.
9 # 4. Filter sample based on quality assessment.
10 # 5. Apply a bandpass filter.
11 # 6. Perform Independent Component Analysis (ICA).
12 # 7. Save the final dataset state.
13 # Example:
14 >>> from eegunity import UnifiedDataset
15 >>> unified_dataset = UnifiedDataset(domain_tag="test",
16 # locator_path=".//test_dataset")
17 >>> unified_dataset.eeg_batch.sample_filter(
18 completeness_check="Completed")
19 >>> unified_dataset.save_locator("./
20 # test_dataset_completed")
21 >>> unified_dataset.eeg_batch.get_quality()
22 >>> locator = unified_dataset.get_locator()
23 >>> unified_dataset.set_locator([locator['Quality
24 # Score'] > 80])
25 >>> unified_dataset.eeg_batch.filter(output_path="./
26 # test_dataset_completed_bandpass_filter_1_49Hz",
27 filter_type='bandpass', l_freq=1, h_freq=49)
28 >>> unified_dataset.save_locator("./
29 # test_dataset_completed_bandpass_filter_1_49Hz")
30 >>> unified_dataset.eeg_batch.ica(output_path="./
31 # test_dataset_completed_bandpass_filter_1_49Hz_ica",
32 max_components=20, method='fastica')
33 >>> unified_dataset.save_locator("./
34 # test_dataset_completed_bandpass_filter_1_49Hz_ica
35 .csv")

```

meet the specific requirements. The filtering process can take into account the quality and completeness level of the data, as well as custom criteria.

- **Denoising:** EEGUnity supports the use of independent component analysis and filtering techniques to remove noise [47] from the EEG data [9]. The denoising process can significantly improve the

quality of the data and ensure the reliability of subsequent analysis.

Table 6: Implementation for Data Unification in EEGUnity.

```

1 # Data Unification Implementation in EEGUnity
2 # -----
3 # This script demonstrates the process of unifying and
4 # preparing EEG data using the EEGUnity toolkit.
5 # The script sequentially implements the following
6 # functions:
7 # 1. Instantiate a UnifiedDataset object by specifying
8 # the path to the EEG dataset and a domain tag for
9 # identification.
10 # 2. Save the EEG data in a different format (e.g.,
11 # FIF format).
12 # 3. Resample the EEG data to a new sampling frequency
13 # .
14 # 4. Align EEG channels to a specified order.
15 # 5. Infer the units of the EEG data.
16 # 6. Extract and display events from the EEG data and
17 # segment it into epochs.
18 # 7. Prepare segmented EEG data for pretraining.
19 # Example:
20 >>> from eegunity import UnifiedDataset
21 >>> unified_dataset = UnifiedDataset(dataset_path='./
22     test_dataset', domain_tag="test_data")
23 >>> unified_dataset.eeg_batch.save_as_other(
24     output_path='./test_dataset_fif')
25 >>> unified_dataset.eeg_batch.resample(output_path='./
26     test_dataset_resample', new_sfreq=128)
27 >>> unified_dataset.eeg_batch.align_channel(
28     output_path='./test_dataset_epoch', channel_order=
29     ["C2", "C3", "C4"])
30 >>> unified_dataset.eeg_batch.infer_units()
31 >>> unified_dataset.eeg_batch.get_events()
32 >>> unified_dataset.eeg_batch.epoch_by_event(
33     output_path='./test_dataset_epoch', seg_sec=1)
34 >>> unified_dataset.eeg_batch.epoch_for_pretraining(
35     output_path='./test_dataset_epoch', seg_sec=1)

```

3.4 Data Unification

Data unification is a novel batch processing workflow in EEGUnity, aiming to transform heterogeneous EEG data into a unified entity. The specific implementation of data unification varies according to different requirements and standards. A detailed outline of the implementation for data unification is illustrated in Table 6. Currently, EEGUnity supports the following unification methods:

- **Save as unified format:** EEGUnity supports saving EEG data in a specified unified format to facilitate subsequent processing and analysis.
- **Resampling:** EEGUnity supports resampling each EEG dataset to a specific target sampling rate.
- **Channel alignment:** EEGUnity supports aligning the channels of EEG data according to a specified channel order, where any missing channel is constructed using interpolation methods, ensuring completeness and consistency.
- **Normalization:** EEGUnity supports computing normalization transformation factors, including the variance and mean of samples/channels, and records the results in the **Locator**. The transformation factors are stored in the **Locator**, making it convenient for users to inspect and correct the factors. This normalization process can be performed when retrieving data.
- **Infer unit:** EEGUnity supports inferring the units for each channel in EEG data. The inferred units are stored in the **Locator**, enabling users to inspect

and correct inferred units easily. Users can convert the units when retrieving data.

- **Extract event:** EEGUnity supports extracting events for each data and storing the results in the **Locator**. Users can quickly inspect, correct, and supplement the events in **Locator**. The events in **Locator** can be directly used with other epoch functions in EEGUnity.
- **Epoch by event:** EEGUnity supports extracting epochs (segments) from each EEG dataset based on specified events listed in the **Locator**.
- **Epoch for pretraining:** EEGUnity supports extracting epochs (segments) from each EEG dataset by controlling segment parameters.

4 Discussion

EEG data processing capability has been significantly improved by software tools such as EEGLAB, FieldTrip, and MNE-Python. Initially, EEGLAB revolutionized EEG analysis by providing a user-friendly MATLAB-based GUI with advanced capabilities like independent component analysis. Following EEGLAB, FieldTrip offered a modular and flexible MATLAB-based toolbox that emphasized customized and in-depth analyses script-based approach. Subsequently, MNE-Python expanded the landscape by introducing Python packages for EEG data processing, with an emphasis on the reproducibility of data processing pipelines. The progression of established software tools reflects a trajectory toward increasingly sophisticated, flexible, and integrated EEG analysis methods.

Compared with established software, the novel Python package EEGUnity proposed in this paper provides notable advantages in multiple EEG datasets management and large-scale data processing, including various functions such as data correction, data cleaning, data unification, and customized batch operations. In addition to functionality, the flexibility of EEGUnity is another critical aspect: (1) the **Locator** design facilitates easy inspection and modification of dataset descriptions, ensuring accurate and reliable data processing; (2) the package features a user-friendly batch process interface, allowing researchers to develop customized batch processes tailored to specific requirements.

The ability to process large-scale data has become increasingly significant in the field of EEG, as foundation models require vast amounts of data for pretraining [51]. This trend is similar to computer vision, where the availability of large and annotated datasets like ImageNet [5] have significantly boosted the development of foundational models. Similarly, the ability of EEGUnity to handle and integrate multiple datasets can drive significant advancements in EEG research, enabling the creation of powerful and accurate foundation models. The large foundational models are essential for extending advanced EEG tasks, eventually facilitating the application of BCI systems. Despite the advantages provided by EEGUnity, the construction of large-scale EEG datasets faces three challenges: data permission, privacy

concerns, and data validation [20, 41]. Addressing these challenges requires coordinated efforts from the research community to establish guidelines and frameworks that facilitate data sharing while safeguarding individual privacy and ensuring data validation.

5 Conclusion

This paper introduces EEGUnity, a new Python package designed to manage multiple EEG datasets, representing a significant step forward in the management of large-scale EEG datasets. In the management of large-scale EEG datasets, EEGUnity provides powerful data processing capabilities, including data correction, data cleaning, and data unification, all of which can be applied flexibly through the `Locator` design and custom batch processing interface. The comprehensive capabilities and flexible design position EEGUnity as a valuable tool for researchers. The integration of large-scale, high-quality datasets facilitated by EEGUnity has the potential to help researchers gain a deep understanding of brain patterns and develop powerful EEG foundation models. As EEGUnity continues to evolve, the contribution of EEGUnity to efficiency and scalability will become pronounced. Future work includes addressing the challenges in data permission, privacy concerns, and data validation. Addressing these challenges requires coordinated efforts, potentially led by a representative organization that obtains necessary permissions and leverages EEGUnity to create a public, large, and standardized EEG dataset.

References

- [1] Reza Abiri, Soheil Borhani, Eric Sellers, Yang Jiang, and Xiaopeng Zhao. A comprehensive review of EEG-based brain–computer interface paradigms. *Journal of Neural Engineering*, 16(1):011001, 2019.
- [2] Justin Berdell, Simon Kudernatsch, and Hasan Firdowsi. AI-driven solid-state device to enable natural control of upper-extremity robotic exoskeletons. *Systems Science & Control Engineering*, 12(1):2331061, 2024.
- [3] Benjamin Blankertz, Klaus-Robert Muller, Dean Krusienski, Gerwin Schalk, Jonathan Wolpaw, Alois Schlogl, Gert Pfurtscheller, José del Millan, and Niels Schroder, Michael and Birbaumer. The BCI competition III: validating alternative approaches to actual BCI problems. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 14(2):153–159, 2006.
- [4] Arnaud Delorme and Scott Makeig. EEGLAB: an open source toolbox for analysis of single-trial EEG dynamics including independent component analysis. *Journal of Neuroscience Methods*, 134(1):9–21, 2004.
- [5] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Fei-Fei Li. Imagenet: A large-scale hierarchical image database. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 248–255. IEEE, 2009.
- [6] Yuqi Deng, Inyong Choi, Barbara Shinn-Cunningham, and Robert Baumgartner. Impoverished auditory cues limit engagement of brain networks controlling spatial selective attention. *NeuroImage*, 202:116151, 2019.
- [7] European Organization For Nuclear Research and OpenAIRE. Zenodo, 2013.
- [8] Ary Goldberger, Luis Amaral, Leon Glass, Jeffrey Hausdorff, Plamen Ivanov, Roger Mark, Joseph Mietus, George Moody, Chung-Kang Peng, and Eugene Stanley. PhysioBank, PhysioToolkit, and PhysioNet: Components of a new research resource for complex physiologic signals. *Circulation*, 101(23):e215–e220, 2000.
- [9] Alexandre Gramfort, Martin Luessi, Eric Larson, Denis Engemann, Daniel Strohmeier, Christian Brodbeck, Roman Goj, Mainak Jas, Teon Brooks, Lauri Parkkonen, and Matti Hämäläinen. MEG and EEG data analysis with MNE-Python. *Frontiers in Neuroscience*, 7, 2013.
- [10] Xiaotong Gu, Zehong Cao, Alireza Jolfaei, Peng Xu, Dongrui Wu, Tzyy-Ping Jung, and Chin-Teng Lin. EEG-based brain-computer interfaces (BCIs): A survey of recent studies on signal sensing technologies and computational intelligence approaches and their applications. *IEEE/ACM Transactions on Computational Biology and Bioinformatics*, 18(5):1645–1666, 2021.
- [11] John Guttag. CHB-MIT scalp EEG database, 2010.
- [12] Bjoern Holtze, Manuela Jaeger, Stefan Debener, Kamil Adiloglu, and Bojana Mirkovic. EEG: Attended speaker paradigm (own name in ignored stream), 2022.
- [13] Bjoern Holtze, Marc Rosenkranz, Manuela Jaeger, Stefan Debener, and Bojana Mirkovic. Attended speaker paradigm (cEEGGrid data), 2022.
- [14] The Temple University Hospital. The temple university hospital EEG corpus. https://isip.piconepress.com/projects/nedc/html/tuh_eeg/. Accessed: 2024.
- [15] Weibang Jiang, Liming Zhao, and Bao liang Lu. Large brain model for learning generic representations with tremendous EEG data in BCI. In *International Conference on Learning Representations (ICLR)*, 2024.
- [16] Ma Jun, Banghua Yang, and Wenzheng Qiu. shu_dataset. Software, 2022.

[17] Aya Kabbara, Nina Forde, Camille Maumet, and Mahmoud Hassan. Successful reproduction of a large EEG study across software packages. *Neuroimage: Reports*, 3(2):100169, 2023.

[18] Murat Kaya, Mustafa Kemal Binli, Erkan Ozbay, Hilmi Yanar, and Yuriy Mishchenko. A large electroencephalographic motor imagery dataset for electroencephalographic brain computer interfaces. Collection, 2018.

[19] Bastiaan Kemp, Aeilko Zwinderman, Bert Tuk, Hilbert Kamphuisen, and Josefien Oberye. Analysis of a sleep-dependent neuronal feedback loop: the slow-wave microcontinuity of the EEG. *IEEE Transactions on Biomedical Engineering*, 47(9):1185–1194, 2000.

[20] Hufsa Khan, Xizhao Wang, and Han Liu. A study on relationship between prediction uncertainty and robustness to noisy data. *International Journal of Systems Science*, 54(6):1243–1258, 2023.

[21] Hong-Kyung Kim, Williamson John, Min-Ho Lee, O-Yeon Kwon, Seong-Whan Lee, Fazli Siamac, Yong-Jeong Kim, and Young-Eun Lee. Supporting data for EEG dataset and OpenBMI toolbox for three BCI paradigms: An investigation into BCI illiteracy, 2019.

[22] Vladimir Litvak, Jérémie Mattout, Stefan Kiebel, Christophe Phillips, Richard Henson, James Kilner, Gareth Barnes, Robert Oostenveld, Jean Daunizeau, Guillaume Flandin, Will Penny, and Karl Friston. EEG and MEG data analysis in SPM8. *Computational Intelligence and Neuroscience*, 2011(1):852961, 2011.

[23] Haijie Liu and Xiaodong Lv. EEG datasets of stroke patients. Dataset, 2022.

[24] Wes McKinney. Data structures for statistical computing in python. In Stéfan van der Walt and Jarrod Millman, editors, *Proceedings of the 9th Python in Science Conference*, pages 51 – 56, 2010.

[25] Jianjun Meng and Bin He. Shared data for exploring training effect in 42 human subjects using a noninvasive sensorimotor rhythm-based online BCI. Online resource, 2019.

[26] Shady Mohamed, Sherif Haggag, Saeid Nahavandi, and Omar Haggag. Towards automated quality assessment measure for EEG signals. *Neurocomputing*, 237:281–290, 2017.

[27] Miryam Naddaf. Mind-reading devices are revealing the brain’s secrets. *Nature*, 626(8000):706–708, 2024.

[28] Mohammad Naser and Sylvia Bhattacharya. Towards practical BCI-driven wheelchairs: A systematic review study. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 31:1030–1044, 2023.

[29] Guiomar Niso, Elena Romero, Jeremy Moreau, Alvaro Araujo, and Laurens Krol. Wireless EEG: A survey of systems and studies. *NeuroImage*, 269:119774, 2023.

[30] Robert Oostenveld, Pascal Fries, Eric Maris, and Jan-Mathijs Schoffelen. FieldTrip: Open source software for advanced analysis of MEG, EEG, and invasive electrophysiological data. *Computational Intelligence and Neuroscience*, 2011(1):156869, 2011.

[31] Gerwin Schalk, Dennis McFarland, Thilo Hinterberger, Niels Birbaumer, and Jonathan Wolpaw. EEG motor movement/imagery dataset, 2009.

[32] Robin Tibor Schirrmeister, Jost Tobias Springenberg, Lukas Dominique Josef Fiederer, Martin Glasstetter, Katharina Eggensperger, Michael Tangermann, Frank Hutter, Wolfram Burgard, and Tonio Ball. Deep learning with convolutional neural networks for EEG decoding and visualization. *Human Brain Mapping*, 2017.

[33] Samhita Shivaprasad, Krishnaraj Chadaga, Cifha Crecil Dias, Niranjana Sampathila, and Srikanth Prabhu. An interpretable schizophrenia diagnosis framework using machine learning and explainable artificial intelligence. *Systems Science & Control Engineering*, 12(1):2364033, 2024.

[34] Rukshani Somarathna, Tomasz Bednarz, and Gelareh Mohammadi. Virtual reality for emotion elicitation - a review. *IEEE Transactions on Affective Computing*, 14(4):2626–2645, 2023.

[35] François Tadel, Sylvain Baillet, John Mosher, Dimitrios Pantazis, and Richard Leahy. Brainstorm: A user-friendly application for MEG/EEG analysis. *Computational Intelligence and Neuroscience*, 2011(1):879716, 2011.

[36] Jiyu Tan, Yurong Li, Qiurong Xie, and Xiaolong Wang. Modeling and causality analysis of human sensorimotor control system based on NVAR method. *International Journal of Network Dynamics and Intelligence*, 2(4):100014, 2023.

[37] Michael Tangermann, Klaus-Robert Müller, Ad Aertsen, Niels Birbaumer, Christoph Braun, Clemens Brunner, Robert Leeb, Carsten Mehring, Kai Miller, Gernot Mueller-Putz, Guido Nolte, Gert Pfurtscheller, Hubert Preissl, Gerwin Schalk, Alois Schlögl, Carmen Vidaurre, Stephan Waldert, and Benjamin Blankertz. Review of the BCI competition IV. *Frontiers in Neuroscience*, 6, 2012.

[38] Mario Giovanni Terzano, Liborio Parrino, Adriano Sherieri, Ronald Chervin, Sudhansu Chokroverty, Christian Guilleminault, Max Hirshkowitz, Mark Mahowald, Harvey Moldofsky, Agostino Rosa, Robert Thomas, and Arthur Walters. Atlas, rules, and recording techniques for the scoring of cyclic

alternating pattern (CAP) in human sleep. *Sleep Medicine*, 2(6):537–553, 2001.

[39] Daron Toutant, Graham McLeod, Parandoush Abbasi, Amirhossein Ghassemi, Maziar Darbandi, and Marcus Ng. A novel customized representation of source space in epilepsy pre-surgical evaluation (P5-8.003). *Neurology*, 98(18_supplement):3751, 2022.

[40] Jiarong Wang, Luzheng Bi, and Weijie Fei. EEG-based motor BCIs for upper limb movement: Current techniques and future insights. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 31:4413–4427, 2023.

[41] Wei Wang, Lifeng Ma, Qiangqiang Rui, and Chen Gao. A survey on privacy-preserving control and filtering of networked control systems. *International Journal of Systems Science*, 55(11):2269–2288, 2024.

[42] Mingnan Wei, Mengjie Huang, and Jiaying Ni. Cross-subject EEG channel selection method for lower limb brain-computer interface. *International Journal of Network Dynamics and Intelligence*, 2(3):100008, 2023.

[43] Ke Yi, Yansen Wang, Kan Ren, and Dongsheng Li. Learning topology-agnostic EEG representations with geometry-aware modeling. In *Conference on Neural Information Processing Systems (NeuIPS)*, 2023.

[44] Alireza Chaman Zar, Sarah Haigh, Pulkit Grover, and Marlene Behrmann. Ultra high-density EEG recording of interictal migraine and controls: sensory and rest. Dataset, 2020.

[45] Wei-Long Zheng and Bao-Liang Lu. Investigating critical frequency bands and channels for EEG-based emotion recognition with deep neural networks. *IEEE Transactions on Autonomous Mental Development*, 7(3):162–175, 2015.

[46] Igor Zyma, Sergii Tukaev, Ivan Seleznov, Ken Kiyono, Anton Popov, Mariia Chernykh, and Oleksii Shpenkov. Electroencephalograms during mental arithmetic task performance. *Data*, 4(1), 2019.

[47] Hongxin Li, Jingsheng Tang, Wenqi Li, Wei Dai, Yaru Liu, and Zongtan Zhou. Multi-task collaborative network: Bridge the supervised and self-supervised learning for EEG classification in RSVP tasks. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 32:638–651, 2024.

[48] Kai Guan, Zhimin Zhang, Tao Liu, and Haijun Niu. Cross-task mental workload recognition based on EEG tensor representation and transfer learning. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 31:2632–2639, 2023.

[49] Jinzhao Zhou, Yiqun Duan, Yingying Zou, Yu-Cheng Chang, Yu-Kai Wang, and Chin-Teng Lin. Speech2EEG: Leveraging pretrained speech model for EEG signal recognition. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 31:2140–2153, 2023.

[50] Wenqiang Yan, Bo He, Jin Zhao, Yongcheng Wu, Chenghang Du, and Guanghua Xu. Frequency domain filtering method for SSVEP-EEG preprocessing. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 31:2079–2089, 2023.

[51] Emadeldeen Eldele, Mohamed Ragab, Zhenghua Chen, Min Wu, Chee-Keong Kwoh, and Xiaoli Li. Self-supervised learning for label-efficient sleep stage classification: A comprehensive evaluation. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, 31:1333–1342, 2023.