

HiT-JEPA: A Hierarchical Self-supervised Trajectory Embedding Framework for Similarity Computation

Lihuan Li
University of New South Wales
Sydney, Australia
lihuan.li@unsw.edu.au

Hao Xue
Hong Kong University of Science and
Technology (Guangzhou)
Guangzhou, China
haoxue@hkust-gz.edu.cn

Shuang Ao
University of New South Wales
Sydney, Australia
shuang.ao@unsw.edu.au

Yang Song
University of New South Wales
Sydney, Australia
yang.song1@unsw.edu.au

Flora Salim
University of New South Wales
Sydney, Australia
flora.salim@unsw.edu.au

Abstract

The representation of urban trajectory data plays a critical role in effectively analyzing spatial movement patterns. Despite considerable progress, the challenge of designing trajectory representations that can capture diverse and complementary information remains an open research problem. Existing methods struggle to incorporate trajectory fine-grained details and high-level summary in a single model, limiting their ability to attend to both long-term dependencies while preserving local nuances. To address this, we propose HiT-JEPA (**H**ierarchical **I**nteractions of **T**rajectory **S**emantics via a **J**oint **E**mboding **P**redictive **A**rchitecture), a unified framework for learning multi-scale urban trajectory representations across semantic abstraction levels. HiT-JEPA adopts a three-layer hierarchy that progressively captures point-level fine-grained details, intermediate patterns, and high-level trajectory abstractions, enabling the model to integrate both local dynamics and global semantics in one coherent structure. Extensive experiments on multiple real-world datasets for trajectory similarity computation show that HiT-JEPA's hierarchical design yields richer, multi-scale representations. Code is available at: <https://anonymous.4open.science/r/HiT-JEPA>.

CCS Concepts

• **Networks** → **Location based services**; • **Applied computing** → **Transportation**; • **Information systems** → **Spatial-temporal systems**.

Keywords

trajectory similarity computation, hierarchical self-supervised learning, transformers, joint embedding predictive architecture

ACM Reference Format:

Lihuan Li, Hao Xue, Shuang Ao, Yang Song, and Flora Salim. 2018. HiT-JEPA: A Hierarchical Self-supervised Trajectory Embedding Framework for Similarity Computation. In *Proceedings of Make sure to enter the correct conference title from your rights confirmation email (Preprint)*. ACM, New York, NY, USA, 13 pages. <https://doi.org/XXXXXXX.XXXXXXX>

1 Introduction

With the widespread use of location-aware devices, trajectory data is now produced at an unprecedented rate [28, 47]. Effectively representing trajectory data powers critical applications ranging from urban computing applications, such as travel time estimation [11, 12, 25], trajectory clustering [3, 15, 36], and traffic analysis [39]. Trajectories exhibit multi-scale attributes, ranging from short-term local transitions (e.g., turns and stops) to long-term strategic pathways or routines, whereas capturing both the fine-grained point-level details of individual trajectories and higher-level semantic patterns of mobility behavior within a unified framework is challenging. This necessitates a representation learning model that accommodates this complexity.

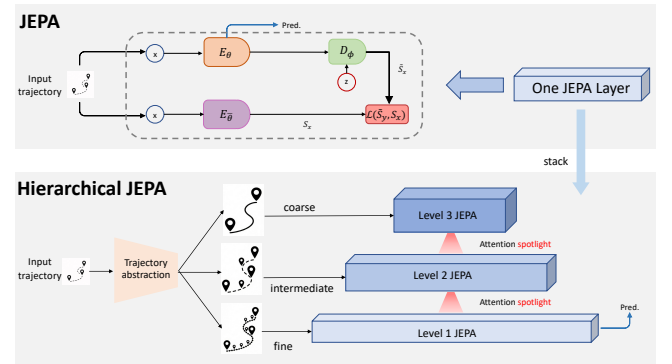


Figure 1: Structural comparisons between JEPA and Hierarchical JEPA.

Early trajectory analysis methods (heuristic methods) [1, 8, 9, 38] relied on handcrafted similarity measures and point-matching heuristics. Recently, deep-learning-based approaches have been applied to learn low-dimensional trajectory embeddings, alleviating

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

Preprint, Sydney, Australia

© 2018 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 978-1-4503-XXXX-X/2018/06

<https://doi.org/XXXXXXX.XXXXXXX>

the need for manual feature engineering [32, 34, 35]. Self-supervised learning frameworks [6, 24], especially contrastive learning, further advanced trajectory representation learning by leveraging large unlabeled datasets [7, 22, 26]. However, these deep learning models usually generate a single scale embedding of an entire trajectory and cannot integrate different semantic levels, i.e., they often neglect fine-grained point-level information in favor of broader trajectory-level features. On the other hand, most representation frameworks [7, 24] are restricted to a single form of trajectory data encoding and lack a mechanism to incorporate global context or higher-level information. Recent work [23] (as shown in Fig. 1, top) explores alternative self-supervised paradigms that capture higher-level semantic information without manual augmentation. Nevertheless, a flexible and semantically aware representation architecture that unifies multiple levels of trajectory information remains an open question.

Sequence models [18, 29], such as recurrent neural networks (RNNs) and Transformers, are a natural choice for trajectory representation due to their ability to process temporally ordered data. However, they exhibit inherent limitations when representing hierarchical semantics of trajectory data. Specifically, these models often operate at a single temporal granularity: they either overemphasize point-level nuances, making them susceptible to noise, or focus too heavily on coarse trajectory-level summaries and thus oversimplify critical details. This single-scale bias in sequential models prevents them from integrating complementary information across abstraction levels and inhibits explicit semantic interactions between local (point-level), intermediate (segment-level), and global (trajectory-level) representations, making it challenging for sequence models to capture long-term dependencies while maintaining the detailed local nuances. Besides, different from uniformly sampled time series data without spatial topology, trajectories are more capricious due to their irregular, geometry-aware, and network-constrained characteristics.

A new framework is thus required to facilitate the model’s understanding of various levels of trajectory representation information, to allow predictions to be grounded on more extensive, multi-dimensional knowledge. In this paper, we propose HiT-JEPA (as shown in Fig. 1, bottom), a hierarchical framework for urban trajectory representation learning, which is designed to address the gaps mentioned above by integrating trajectory semantics across three levels of granularity. Its three-layer architecture explicitly captures (1) point-level details, modeling fine-grained spatial-temporal features of consecutive points; (2) intermediate-level patterns, learning representations of local displacement patterns that reflect mesoscopic movement structures; and (3) high-level abstractions, distilling the overall semantic context as summarized moving behaviors of an entire trajectory. The model unifies multiple information scales within a single representation framework through this hierarchy. Moreover, HiT-JEPA enables interactions between adjacent levels to enrich and align the learned trajectory embeddings across scales. By leveraging a joint embedding predictive architecture, the framework learns to predict and align latent representations between these semantic levels, facilitating semantic integration in a self-supervised manner. For clarity, we summarize our contributions as follows:

- We propose HiT-JEPA, a novel hierarchical trajectory representation learning architecture that encapsulates movement information across different semantic levels inside a cohesive framework. HiT-JEPA is the first architecture to explicitly unify both fine-grained and abstract trajectory patterns within a single model.
- HiT-JEPA introduces a joint embedding predictive architecture that unifies the entire trajectory across multiple levels of abstraction, resulting in a flexible representation that can seamlessly incorporate local trajectory nuances and global semantic context. By striking a balance between coarse-to-fine trajectory representations by our proposed hierarchical interaction module, we address the limitations of single-scale or single-view models.
- We conduct extensive experiments on real-world urban trajectory datasets spanning diverse cities and movement patterns, demonstrating that HiT-JEPA’s semantically enriched, hierarchical embeddings exhibit comparative trajectory similarity search and remarkably superior zero-shot performance across heterogeneous urban and maritime datasets.

2 Related Work

Urban Trajectory Representation Learning on Similarity Computation. Self-supervised learning methods for trajectory similarity computation are proposed to cope with robust and generalizable trajectory representation learning on large, unlabeled datasets. t2vec [24] divides spatial regions into rectangular grids and applies Skip-gram [27] models to convert grid cells into word tokens, then leverages an encoder-decoder framework to learn trajectory representations. TrajCL [7] applies contrastive learning on multiple augmentation schemes with a dual-feature attention module to learn both structural and spatial information in trajectories. CLEAR [22] proposes a ranked multi-positive contrastive learning method by ordering the similarities of positive trajectories to the anchor trajectories. Recently, T-JEPA [23] employs a Joint Embedding Predictive Architecture that shifts learning from trajectory data into representation space, establishing a novel self-supervised paradigm for trajectory representation learning. It is also worth noting that robust trajectory representations are often the prerequisite for effective trajectory clustering [15, 30, 37], which focuses on uncovering latent behavioral patterns by grouping trajectories with high semantic affinity. However, none of the above methods manages to explicitly capture hierarchical trajectory information. We propose HiT-JEPA to support coarse-to-fine, multi-scale trajectory abstraction extraction in a hierarchical JEPA structure.

Hierarchical Self-supervised Learning (HSSL). Self-supervised learning methods have significantly advanced the capability to extract knowledge from massive amounts of unlabeled data. Recent approaches emphasize multi-scale feature extraction to achieve a more comprehensive understanding of complex data samples (e.g., lengthy texts or high-resolution images with intricate details). In Computer Vision (CV), Chen *et al.* [10] stack three Vision Transformers [14] variants (varying patch size configurations) to learn cell, patch, and region representations of gigapixel whole-slide

images in computational pathology. Kong *et al.* [19] design a hierarchical latent variable model incorporating Masked Autoencoders (MAE) [17] to encode and reconstruct multi-level image semantics. Xiao *et al.* [31] split the hierarchical structure by video semantic levels and employ different learning objectives to capture distinct semantic granularities. In Natural Language Processing (NLP), Zhang *et al.* [42] develop HIBERT, leveraging BERT [13] to learn sentence-level and document-level text representations for document summarization. Li *et al.* [21] introduce HiCLRE, a hierarchical contrastive learning framework for distantly supervised relation extraction, utilizing Multi-Granularity Recontextualization for cross-level representation interactions to effectively reduce the influence of noisy data. In contrast to these methods, which partition inputs into discrete fragments and directly propagate representations across levels, HiT-JEPA encodes the entire trajectory at multiple abstraction levels by coupling adjacent-level attention weights from a hierarchical JEPA to learn multi-scale urban trajectory representations.

3 Methodology

Compared to previous methods that only model trajectories at point-level, our primary goal in designing HiT-JEPA is to bridge the gap between simultaneous modeling of local trajectory details and global movement patterns by embedding explicit, cross-level trajectory abstractions into a JEPA framework. To that end, as Fig. 2 illustrates, given a trajectory T , we apply three consecutive convolutional layers followed by max pooling operations to produce point-level representation $T^{(1)}$, intermediate-level semantics $T^{(2)}$ and high-level summary $T^{(3)}$, where higher layer representations consist of coarser but semantically richer trajectory patterns. Trajectory abstraction at layer l is learned by the corresponding JEPA layer JEPA^(l) to capture multi-scale sequential dependencies.

Spatial region representation. Considering the continuous and high-precision nature of GPS coordinates, we partition the continuous spatial regions into fixed cells. But different from previous approaches [7, 22, 23] that use grid cells, we employ Uber H3¹ to map GPS points into hexagonal grids to select the grid cell resolutions adaptively according to the study area size. Each hexagonal cell shares six equidistant neighbors, with all neighboring centers located at the same distance from the cell's center. Therefore, we structurally represent the spatial regions by a graph $\mathcal{G} = (V, E)$ where each node $v_i \in V$ is a hexagon cell connecting to its neighboring cells $v_j \in V$ by an undirected edge $e_{ij} \in E$. We pretrain the spatial node embeddings $\mathcal{H}$ of graph $\mathcal{G}$ using node2vec [16], which produces an embedding set:

$$\mathcal{H} = \{h_i \in \mathbb{R}^d : v_i \in V\}, \quad (1)$$

where each h_i encodes the relative position of node v_i . For a GPS location $P = (lon, lat)$, we first assign it to its grid cell index via:

$$\delta: \mathbb{R}^2 \rightarrow \{1, \dots, |V|\}, \quad (2)$$

and then look up its embedding $h_{\delta(p)} \in \mathcal{H}$.

Hierarchical trajectory abstractions. After obtaining the location embeddings, we construct trajectory representations at multiple semantic levels, which are termed hierarchical trajectory abstractions. Given a trajectory T with length n , we obtain

its location embeddings and denote the input trajectory as $T = (h_{\delta(t_1)}, h_{\delta(t_2)}, \dots, h_{\delta(t_n)}) \in (\mathbb{R}^d)^n$. Then, we create its multi-level abstractions $T^{(1)}, T^{(2)}, T^{(3)}$ by a set of convolutions with kernel size of 3 and stride of 2, and max pooling layers:

$$T^{(1)} = \text{LayerNorm}(\text{MaxPool1D}(\text{Conv1D}(T))) \\ \in (\mathbb{R}^d)^{n_1}, \quad n_1 = n, \quad (3)$$

$$T^{(2)} = \text{LayerNorm}(\text{MaxPool1D}(\text{Conv1D}(T^{(1)}))) \\ \in (\mathbb{R}^d)^{n_2}, \quad n_2 = \lfloor n_1/2 \rfloor, \quad (4)$$

$$T^{(3)} = \text{LayerNorm}(\text{MaxPool1D}(\text{Conv1D}(T^{(2)}))) \\ \in (\mathbb{R}^d)^{n_3}, \quad n_3 = \lfloor n_2/2 \rfloor. \quad (5)$$

where $T^{(1)}$ in layer 1 preserves the channel dimension d and sequence length $n_1 = n$, $T^{(2)}$ in layer 2 keeps the channel dimension and halves the sequence length to $n_2 = n/2$, and $T^{(3)}$ in layer 3 also keeps the channel dimension and halves the sequence length to $n_3 = n/4$. Higher-layer trajectory abstractions contain aggregated, high-level trajectory semantic behaviors, while lower layers preserve fine-grained, local dynamic details.

Target encoder branch. For the target encoder branch, at each level $l \in \{1, 2, 3\}$ the target trajectory representation is extracted by:

$$S^{(l)} = E_{\theta}^{(l)}(T^{(l)}) \quad (6)$$

where $E_{\theta}^{(l)}$ is the target encoder at layer l . Similar to previous JEPA methods [2, 4, 20, 23], we randomly sample M times from target representation to create the targets, where $S^{(l)}(i) = \{S_j^{(l)}\}_{j \in \mathcal{M}_i}$. Therefore, $S^{(l)}(i)$ is the i -th sampled target and $\mathcal{M}_i$ is the i -th sampling mask starting from a random position. To ensure the diversity of learning targets, we follow T-JEPA [23] and introduce a set of masking ratios $r = \{r_1, r_2, r_3, r_4, r_5\}$ where each ratio value specifies the fraction of the representation to mask. At each sampling step, we uniformly draw one ratio from r . We also introduce a probability p : with probability p , we apply successive masking, and with probability $1-p$, we scatter the masks randomly. Successive masking encourages the encoder to learn both local and long-range dependencies.

Context encoder branch. For the context encoder branch, we initially sample a trajectory context $C^{(l)}$ from $T^{(l)}$ at level l by a mask C_T at with sampling ratio p_T . Next, to prevent any information leakage, we remove from $C^{(l)}$ all positions that overlap with the targets $S^{(l)}$ to obtain the context input $T'^{(l)}$. The context trajectory representation $S'^{(l)}$ at level l is extracted by:

$$S'^{(l)} = E_{\theta}^{(l)}(T'^{(l)}) \quad (7)$$

where $E_{\theta}^{(l)}$ is the context encoder at level l . During inference, we use $S'^{(1)}$ from $E_{\theta}^{(1)}$, enriched by the full hierarchy of multi-scale abstractions, as the final output of trajectory representations for similarity comparison or downstream fine-tuning.

Predictions. Once we have both context representations $S'^{(l)}$ and targets $S^{(l)}$ at level l , we apply JEPA predictor $D_{\phi}^{(l)}$ on $S'^{(l)}$ to approximate $S^{(l)}$ with the help of the mask tokens $z^{(l)}$:

$$\tilde{S}^{(l)}(i) = D_{\phi}^{(l)}(\text{CONCAT}(S'^{(l)}, \text{PE}(i) \oplus (z^{(l)}))) \quad (8)$$

¹<https://h3geo.org/>

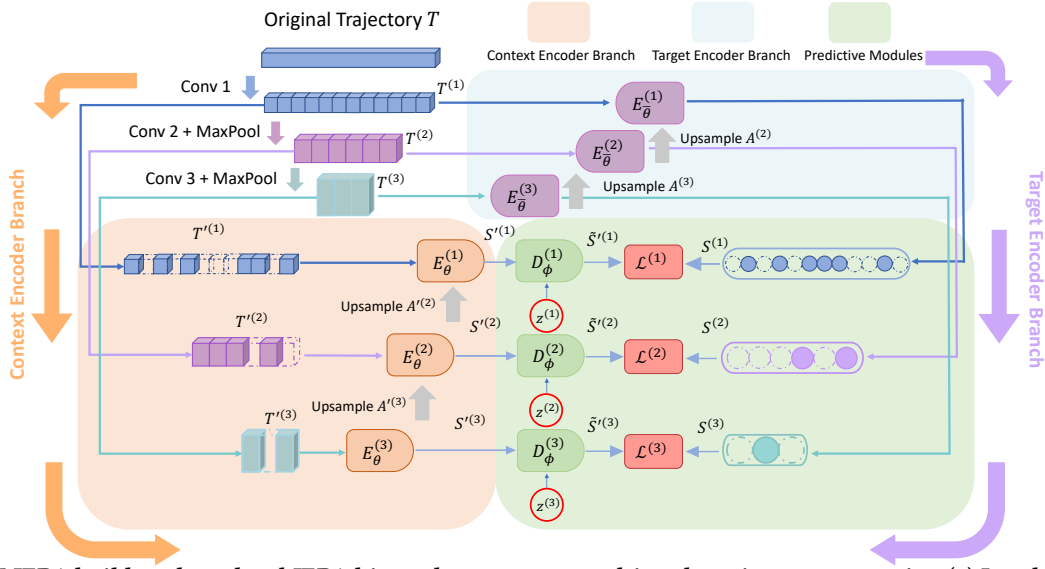


Figure 2: HiT-JEPA builds a three-level JEPA hierarchy to extract multi-scale trajectory semantics: (1) Level 1 encodes fine-grained, local point-level features; (2) Level 2 abstracts mesoscopic segment-level patterns; (3) Level 3 captures coarse, global route structures. Trajectory information is propagated from top to bottom, consecutive levels via attention weights.

where $\text{CONCAT}(\cdot)$ denotes concatenation and $\text{PE}(i)$ refers to the positional embedding after applying the target sampling mask $\mathcal{M}_i$. $\oplus$ is element-wise addition between these masked positional embeddings and the mask tokens. Then, we concatenate the mask tokens with positional information with the context representations to guide the predictor in approximating the missing components in the targets at the representation space.

Hierarchical interactions. By applying JEPA independently at each level, we learn trajectory representations at multiple scales of abstractions. However, the encoders at each level remain siloed and retain only their scale-specific information without leveraging insights from other layers. To enable hierarchical and multi-scale feature extraction, we propagate high-level information down to the next lower abstraction layer.

We adopt Transformer encoders [29] for both context and target encoders as their self-attention module is proven highly effective in sequential modeling. Therefore, for both branches, we inject attention weights to the next lower level as a “top-down spotlight” where the high-level encoder casts its attention maps to the lower layer, lighting up where the lower-level encoder should attend. For clarity, we illustrate the process using the target encoder branch as an example. At level l , given the query and key matrices $Q^{(l)}$ and $K^{(l)}$ of an input trajectory abstraction $T^{(l)}$, we first retrieve the attention coefficient by:

$$d_k = \frac{d^{(l)}}{H}, \quad Q_i^{(l)} = Q^{(l)} W_i^{Q,(l)}, \quad K_i^{(l)} = K^{(l)} W_i^{K,(l)}, \quad (9)$$

$$A_i^{(l)} = \text{softmax} \left(\frac{Q_i^{(l)} (K_i^{(l)})^\top}{\sqrt{d_k}} \right), \quad i = 1, \dots, H \quad (10)$$

where H is the number of attention heads, $W_i^{Q,(l)}$ and $W_i^{K,(l)}$ are head- i projections, $d^{(l)}$ is the channel dimension, and $A_i^{(l)}$ is the

attention coefficient of the head- i . The multi-head attention coefficient $A^{(l)}$ are concatenated and projected by:

$$A^{(l)} = \text{Concat}(A_1^{(l)}, \dots, A_H^{(l)}) W^{O,(l)} \quad (11)$$

where $W^{O,(l)}$ is the multi-head projection. To construct the output representation $S^{(l)}$ at level l , we simply apply the value matrix $V^{(l)}$ by:

$$S^{(l)} = A^{(l)} V^{(l)} \quad (12)$$

Since the dimension of $A^{(l)}$ is:

$$A^{(l)} \in [0, 1]^{n^{(l)} \times n^{(l)}}, \quad n^{(l)} = \left\lfloor \frac{n^{(l-1)}}{2} \right\rfloor \quad (13)$$

where $n^{(l)}$ is the length of trajectory abstractions at level l , which is half of $n^{(l-1)}$ at level $l-1$ due to Eq. 4 and Eq. 5. We need to upsample the attention coefficients:

$$\tilde{A}^{(l)} = \text{Interpolate}_{\text{bilinear}}(A^{(l)}) \in [0, 1]^{n^{(l-1)} \times n^{(l-1)}} \quad (14)$$

where we adopt bilinear interpolation to upsample the attention weights at level l . To propagate the upsampled $\tilde{A}^{(l)}$ to the next lower level, we refer to [7] to calculate a weighted sum between $\tilde{A}^{(l)}$ and lower level attention coefficient $A^{(l-1)}$. Therefore, we obtain the updated attention coefficient $A^{(l-1)}$ at level $l-1$ by:

$$A^{(l-1)} = (\sigma A^{(l-1)} + (1 - \sigma) \tilde{A}^{(l)}) \quad (15)$$

where σ is a learnable scale factor weighting the importance of $A^{(l)}$. Attention coefficient $A^{(l)}$ from the context encoders follows an identical procedure. Global insights guide next-layer feature extraction to focus on semantically important segments. This alignment sharpens local feature extraction, ensuring consistency with the overall context.

Loss function. After obtaining the predicted representation $\tilde{S}^{(l)}(i)$ and the i -th target representation $S^{(l)}(i)$ at level l , we apply SmoothL1 to calculate the loss $\mathcal{L}^{(l)}$ between them:

$$\begin{aligned}
\mathcal{L}^{(l)} = & \underbrace{\frac{1}{MB} \sum_{i=1}^M \sum_{b=1}^B \sum_{n=1}^{N^{(l)}} \sum_{k=1}^{d^{(l)}} \text{SmoothL1}(\tilde{S}^{(l)}(i)_{b,n,k}, S^{(l)}(i)_{b,n,k})}_{\mathcal{L}_{\text{JEPA}}^{(l)}} \\
& + \underbrace{\text{VarLoss}(z_{\text{tar}}^{(l)}) + \text{VarLoss}(z_{\text{ctx}}^{(l)}) + \text{CovLoss}(z_{\text{tar}}^{(l)}) + \text{CovLoss}(z_{\text{ctx}}^{(l)})}_{\mathcal{L}_{\text{VICReg}}^{(l)}}.
\end{aligned} \tag{16}$$

where we sum over the channel and sequence length dimension $d^{(l)}$ and $N^{(l)}$, and average over the batch and number of target masks dimension B and M to obtain JEPA loss $\mathcal{L}_{\text{JEPA}}^{(l)}$. We also add VICReg [5] to prevent representation collapse, yielding more discriminative representations. We obtain the regularization term $\mathcal{L}_{\text{VICReg}}^{(l)}$ by summing up the variance loss $\text{VarLoss}(\cdot)$ and covariance loss $\text{CovLoss}(\cdot)$ of both expanded context representation $z_{\text{ctx}}^{(l)} = \text{MLP}(S'^{(l)})$ and expanded target representation $z_{\text{tar}}^{(l)} = \text{MLP}(S^{(l)})$ via a single-layer MLP. Afterwards, $\mathcal{L}_{\text{VICReg}}^{(l)}$ is added to the loss $\mathcal{L}^{(l)}$ at level l .

For level $l \in \{1, 2, 3\}$, we calculate a weighted sum to obtain the final loss $\mathcal{L}$:

$$\mathcal{L} = \lambda * \mathcal{L}^{(1)} + \mu * \mathcal{L}^{(2)} + \nu * \mathcal{L}^{(3)} \tag{17}$$

where λ , μ and ν are the scale factors for loss at each level.

4 Experiments

We conduct experiments on three real-world urban GPS trajectory datasets: Porto ², T-Drive [40, 41] and GeoLife [43–45], two FourSquare datasets: FourSquare-TKY and FourSquare-NYC [33], and one vessel trajectory dataset: Vessel Tracking Data Australia, which we call “AIS(AU)” ³.

Table 1: Statistics of datasets after preprocessing.

Data type	Dataset	#points	#trajectories
Urban trajectories	Porto	65,913,828	1,372,725
	T-Drive	5,579,067	101,842
	GeoLife	8,987,488	50,693
Check-in sequences	TKY	106,480	3,048
	NYC	28,858	734
Vessel trajectories	AIS(AU)	485,424	7,095

4.1 Datasets

Here we list the details of the datasets:

- **Porto** includes 1.7 million trajectories from 442 taxis in Porto, Portugal. The dataset was collected from July 2013 to June 2014.
- **T-Drive** contains trajectories of 10,357 taxis in Beijing, China from Feb. 2 to Feb. 8, 2008. The average sampling interval is 3.1 minutes.

- **GeoLife** contains trajectories of 182 users in Beijing, China from April 2007 to August 2012. There are 17,6212 trajectories in total with most of them sampled in 1–5 seconds.
- **Foursquare-TKY** is collected for 11 months from April 2012 to February 2013 in Tokyo, Japan, with 573,703 check-ins in total.
- **Foursquare-NYC** is collected for 11 months from April 2012 to February 2013 in New York City, USA, with 227,428 check-ins in total.
- **AIS(AU)** comprises vessel traffic records collected by the Craft Tracking System (CTS) of Australia. In this paper, we use vessel trajectories in February 2025.

We first keep trajectories in urban areas with the number of points ranging from 20 to 200, where the statistics of the datasets after preprocessing are shown in Table 1. We use 200,000 trajectories for Porto, 70,000 for T-Drive, and 35000 for GeoLife as training sets. Each dataset has 10% of data used for validation. As there are many fewer trajectories in TKY, NYC, and AIS(AU), we use all trajectories in these datasets for testing. For the testing set, we select 100,000 trajectories for Porto, 10,000 for T-Drive and GeoLife, 3000 for TKY, 700 for NYC, and 7000 for AIS(AU). For the downstream fine-tuning task, we select 10,000 trajectories for Porto and T-Drive, and 5000 for GeoLife, where the selected trajectories are split by 7:1:2 for training, validation, and testing. We train Hit-JEPA and all baselines from scratch for Porto, T-Drive, and GeoLife datasets. Then, we load the pre-trained weights from Porto and conduct zero-shot self-similarity experiments on each of the TKY, NYC, and AIS(AU) to evaluate the generalization ability of all models.

4.2 Implementation Details

We use Adam Optimizer for training and optimizing the model parameters across all levels, except for the target encoders. The target encoder at each level l updates its parameters via the exponential moving average of the parameters of the context encoder at the same level. The maximum number of training epochs is 20, and the learning rate is 0.0001, decaying by half every 5 epochs. The embedding dimension d is 256, and the batch size is 64. We apply 1-layer Transformer Encoders for both context and target encoders at each level, with the number of attention heads set to 8 and hidden layer dimension to 1024. We use a 1-layer Transformer Decoder as the predictor at each level l with the number of attention heads set to 8. We use learnable positional encoding for all the encoders and decoders. We set the resampling masking ratio to be selected from $r = \{10\%, 15\%, 20\%, 25\%, 30\%\}$ and the number of sampled targets M to 4 for each trajectory at each model level l . The successive sampling probability p is set to 50%, and the initial context sampling ratio p_γ is set to range from 85% to 100%. The scale factors for the final loss are $\lambda = 0.05$, $\mu = 0.15$, and $\nu = 0.8$. We use a hexagonal cell resolution of 11 for Porto, resolution 10 for T-Drive, GeoLife, TKY, and NYC, and resolution 4 for AIS(AU). All experiments are conducted on servers with Nvidia A5000 GPUs.

4.3 Baselines

We compare HiT-JEPA with four heuristic trajectory similarity measures: EDR, LCSS, Hausdorff, and Discrete Fréchet, and five

²<https://www.kaggle.com/c/pkdd-15-predict-taxi-service-trajectory-i/data>

³<https://www.operations.amsa.gov.au/spatial/DataServices/DigitalData>

Table 2: Mean-rank comparison of methods across meta ratios $R_1 \sim R_5$. For each meta ratio, we report the mean ranks under varying DB size $|D|$, downsampling rate ρ_s , and distortion rate ρ_d . Bold values are the lowest mean ranks and underlined values are the second lowest.

Dataset	Method	R ₁			R ₂			R ₃			R ₄			R ₅		
		D	ρ _s	ρ _d	D	ρ _s	ρ _d	D	ρ _s	ρ _d	D	ρ _s	ρ _d	D	ρ _s	ρ _d
Porto	EDR	6.877	41.876	25.656	12.792	122.337	25.122	16.052	401.732	24.494	20.645	1127.108	23.918	26.101	2293.710	23.993
	LCSS	52.502	224.574	230.361	103.628	253.337	229.337	137.337	311.083	227.792	181.325	385.245	225.323	231.807	492.691	224.426
	Hausdorff	2.597	7.531	7.890	3.960	13.256	7.718	4.914	11.809	8.713	6.093	16.237	8.570	7.518	28.808	6.848
	Fr�chet	4.162	13.856	14.095	7.344	16.166	13.667	9.144	31.097	15.129	11.562	43.857	14.186	14.472	74.390	12.592
	TrajCL	1.004	1.047	1.017	1.007	1.170	1.029	1.008	1.905	1.036	1.011	6.529	1.060	1.014	68.557	1.022
	TrjSR	3.240	12.553	12.509	5.321	16.945	15.401	7.073	37.150	15.901	8.740	65.413	28.914	10.192	149.950	32.730
	CLEAR	3.235	7.796	4.250	4.012	13.323	4.442	4.088	22.814	4.284	4.137	44.865	4.438	4.204	123.921	4.399
	T-JEPA	1.029	1.455	1.097	1.048	<u>2.304</u>	1.084	1.053	<u>4.413</u>	1.115	1.061	<u>9.599</u>	1.110	1.074	23.900	1.123
	BLUE	2.576	18.956	9.587	3.707	31.181	17.926	4.834	54.553	16.638	5.914	111.849	32.330	6.952	250.886	41.010
	HiT-JEPA	<u>1.026</u>	<u>1.369</u>	<u>1.074</u>	<u>1.043</u>	2.624	<u>1.077</u>	<u>1.048</u>	5.541	<u>1.085</u>	<u>1.058</u>	13.773	<u>1.093</u>	<u>1.065</u>	<u>28.806</u>	<u>1.119</u>
T-Drive	EDR	47.461	313.419	222.460	90.016	558.132	221.547	135.747	830.649	224.160	181.244	1136.547	222.132	223.593	1422.003	224.402
	LCSS	5.697	21.462	20.816	8.392	24.296	20.762	13.325	29.944	20.698	17.180	36.488	20.617	20.874	53.564	20.538
	Hausdorff	13.165	61.861	59.387	24.435	51.330	59.438	35.985	33.801	59.559	47.927	56.741	59.346	59.487	61.825	59.281
	Fr�chet	11.901	53.559	52.624	21.741	45.354	52.586	31.992	27.896	52.632	42.557	41.717	52.549	52.675	45.183	52.519
	TrajCL	1.111	1.203	1.267	1.128	1.348	1.320	1.146	1.668	1.355	1.177	<u>1.936</u>	1.513	1.201	<u>3.356</u>	1.179
	TrjSR	110.726	674.116	581.776	223.841	795.331	572.944	356.941	870.731	566.816	475.872	960.404	545.278	592.146	1033.404	566.696
	CLEAR	1.047	1.305	1.111	1.062	1.484	1.110	1.077	1.964	1.171	1.088	3.497	1.152	1.104	3.902	1.172
	T-JEPA	1.032	<u>1.088</u>	<u>1.054</u>	1.034	<u>1.225</u>	<u>1.061</u>	1.036	<u>1.617</u>	<u>1.069</u>	<u>1.045</u>	3.226	<u>1.067</u>	<u>1.049</u>	4.115	<u>1.078</u>
	BLUE	10.707	48.475	47.958	18.735	64.435	48.448	26.688	102.816	37.423	34.592	108.631	37.838	42.587	150.521	34.917
	HiT-JEPA	<u>1.040</u>	1.057	1.035	<u>1.040</u>	1.085	1.029	<u>1.040</u>	1.172	1.039	1.040	1.389	1.033	1.040	<u>2.222</u>	1.034
GeoLife	EDR	64.467	334.605	333.229	129.798	342.666	327.207	162.822	341.532	322.759	306.303	359.849	320.356	339.344	345.723	317.877
	LCSS	70.498	374.889	369.087	143.521	375.423	364.732	181.778	373.907	361.717	335.844	376.130	360.432	373.353	378.057	358.623
	Hausdorff	3.166	8.281	9.800	4.341	6.277	9.563	5.051	8.630	9.582	7.746	8.656	8.978	8.263	8.343	9.438
	Fr�chet	3.443	9.294	10.432	4.687	7.408	10.423	5.425	10.007	10.423	8.468	9.647	10.703	9.172	9.728	10.107
	TrajCL	1.130	1.440	7.973	1.168	1.435	19.266	1.195	1.720	12.397	1.234	1.616	10.560	1.256	2.675	11.035
	TrjSR	6.765	8.332	7.747	7.393	8.594	7.942	7.661	8.688	7.648	7.767	8.566	8.534	8.350	8.770	9.460
	CLEAR	1.110	1.196	1.212	1.124	1.318	<u>1.211</u>	1.144	1.818	1.189	1.145	2.237	1.239	1.155	3.712	1.333
	T-JEPA	1.019	1.052	<u>1.047</u>	<u>1.034</u>	1.030	1.093	<u>1.036</u>	1.103	1.101	<u>1.040</u>	1.150	1.154	<u>1.047</u>	1.218	1.197
	BLUE	1.445	2.808	25.613	1.720	4.025	30.134	1.924	6.840	32.967	2.122	4.887	23.083	2.377	4.386	27.894
	HiT-JEPA	<u>1.033</u>	<u>1.061</u>	<u>1.170</u>	1.033	<u>1.111</u>	<u>1.370</u>	1.033	<u>1.247</u>	<u>1.357</u>	1.033	<u>1.377</u>	<u>1.509</u>	1.033	<u>1.573</u>	<u>1.511</u>
TKY (zero-shot)	EDR	72.453	371.982	337.370	143.372	450.190	338.495	216.370	527.870	335.778	276.345	596.542	336.118	338.352	637.338	337.973
	LCSS	8.403	25.565	22.773	13.443	36.448	22.815	16.998	47.748	22.720	18.960	63.605	22.685	22.863	83.547	22.758
	Hausdorff	24.560	113.567	110.703	46.892	128.057	110.567	67.725	129.387	110.453	89.328	168.717	109.778	110.728	191.167	110.470
	Fr�chet	63.988	332.987	327.215	132.443	357.870	325.568	193.948	364.610	326.060	259.787	395.808	325.560	326.818	404.967	325.135
	TrajCL	17.590	66.963	75.397	32.377	67.835	79.228	46.958	116.677	59.222	62.145	170.460	69.642	78.722	211.487	65.258
	TrjSR	8.673	31.770	27.505	17.120	37.070	30.758	22.310	48.985	30.923	26.820	64.380	33.113	29.318	84.302	34.034
	CLEAR	119.561	591.345	583.863	242.493	626.075	591.460	349.132	646.160	587.138	456.525	662.553	588.212	577.238	709.903	591.107
	T-JEPA	<u>1.948</u>	<u>3.060</u>	<u>3.245</u>	<u>2.272</u>	<u>4.227</u>	<u>3.165</u>	<u>2.617</u>	<u>7.975</u>	<u>3.313</u>	<u>2.913</u>	<u>18.173</u>	<u>3.202</u>	<u>3.275</u>	<u>19.135</u>	<u>3.127</u>
	BLUE	49.847	135.002	118.957	67.890	155.228	122.083	84.853	181.575	116.502	101.950	208.765	117.895	119.862	293.207	116.375
	HiT-JEPA	1.508	2.490	2.060	1.707	2.962	2.002	1.835	4.985	2.067	1.930	10.268	2.045	2.057	14.755	1.988
NYC (zero-shot)	EDR	19.086	82.371	76.907	35.957	92.129	76.943	51.079	94.529	77.271	64.257	105.657	77.950	77.014	107.900	76.071
	LCSS	9.164	21.343	19.393	10.779	23.986	19.329	13.807	21.607	19.150	17.014	27.086	19.414	19.279	28.521	19.250
	Hausdorff	7.014	31.436	26.621	11.921	33.207	26.536	17.329	40.057	26.521	21.707	40.457	26.750	26.650	57.100	26.636
	Fr�chet	15.350	78.471	80.357	33.479	83.707	79.879	50.379	83.743	79.757	63.871	91.836	80.293	80.057	92.064	79.921
	TrajCL	4.336	16.886	15.093	6.457	18.857	16.971	9.129	22.007	16.443	12.350	37.579	11.236	15.071	36.650	6.543
	TrjSR	3.929	5.457	6.307	4.793	5.171	7.950	5.457	8.350	6.679	5.821	12.757	7.443	6.007	14.329	7.907
	CLEAR	19.693	68.843	68.057	32.171	74.964	68.321	43.214	75.121	69.221	55.507	79.514	70.507	67.207	84.421	65.914
	T-JEPA	<u>1.450</u>	<u>1.950</u>	<u>1.714</u>	<u>1.514</u>	<u>3.050</u>	<u>1.736</u>	<u>1.571</u>	<u>2.400</u>	<u>1.679</u>	<u>1.636</u>	<u>2.457</u>	<u>1.771</u>	<u>1.714</u>	<u>5.850</u>	<u>1.807</u>
	BLUE	12.45	46.536	44.386	20.350	60.164	43.321	27.907	78.136	41.329	35.664	76.500	42.564	42.871	86.493	42.357
	HiT-JEPA	1.343	1.743	1.493	1.364	2.143	1.500	1.414	1.636	1.500	1.457	2.407	1.550	1.500	3.343	1.471
AIS(AU) (zero-shot)	EDR	62.017	208.320	210.012	118.344	206.546	210.011	157.764	204.515	210.004	184.769	204.077	209.993	210.016	223.721	210.001
	LCSS	95.162	308.838	312.060	177.483	305.615	312.060	234.421	303.067	312.056	274.775	297.921	312.040	312.060	294.649	312.047
	Hausdorff	20.862	64.504	64.134	36.845	64.474	64.239	48.582	64.981	64.170	57.062	65.661	64.138	64.099	67.696	63.943
	Fr�chet	13.734	50.794	49.529	25.926	51.786	49.606	35.541	54.110	49.618	43.260	57.427	49.630	49.492	63.237	49.493
	TrajCL	9.057	37.721	37.866	18.771	9.878	37.879	26.538	41.068	37.862	33.004	45.352	37.911	37.866	48.651	38.399
	TrjSR	692.000	3658.400	3649.450	1390.364	3661.421	3649.407	2136.271	3675.043	3649.150	2942.586	3714.564	3649.086	2892.264	3700.221	3649.371
	CLEAR	38.042	188.171	184.600	73.164	187.914	184.579	112.371	192.571	184.600	150.050	191.629	184.871	184.600	198.843	184.593
	T-JEPA	2.156	5.661	4.753	3.176	6.849	4.753	3.889	9.486	4.755	4.364	13.055	4.758	4.754	16.986	4.749

from the low-resolution image by leveraging single-image super-resolution to learn better spatial trajectory representations. CLEAR improves the contrastive learning process by ranking the positive trajectory samples based on their similarities to anchor samples, capturing detailed differences from similar trajectories. T-JEPA utilizes Joint Embedding Predictive Architecture to encode and predict trajectory information in the representation space, which effectively captures necessary trajectory information. BLUE proposes a hierarchical patch-based trajectory representation that progressively reduces GPS coordinate precision to capture both fine-grained spatial-temporal details and high-level travel semantics via a pyramid-structured encoder-decoder Transformer. We run these models from their open-source code repositories with default parameters.

4.4 Quantitative Evaluation

In this section, we evaluate HiT-JEPA and compare it to baselines in three experiments: most similar trajectory search, robustness of learn representations, and generalization with downstream fine-tuning. We combine the first two experiments as “Self-similarity”.

4.4.1 Self-similarity. Following similar experimental settings of previous work [7, 23], we construct a Query trajectory set Q and a database trajectory D for the testing set given a trajectory. Q has 1,000 trajectories for Porto, T-Drive, and GeoLife, 600 for TKY, 140 for NYC, and 1400 for AIS(AU). And D has 100,000 trajectories for Porto, 10,000 for T-Drive and Geolife, 3000 for TKY, 700 for NYC, and 7000 for AIS(AU). Details can be found in Appendices A.1.

Table 2 reports the mean ranks of all methods. HiT-JEPA achieves the overall lowest mean ranks on five of the six datasets. Among the urban GPS datasets (Porto, T-Drive, and GeoLife), it attains its lowest ranks on T-Drive. For example, the mean ranks for DB size $|D|$ across 20%~100% and for distortion rate p_d across 0.1~0.5 remain remarkably steady (1.040~1.041 and 1.031~1.038, respectively). T-Drive contains taxi trajectories with much longer and more irregular sampling intervals (3.1 minutes on average). By leveraging a hierarchical structure to capture global, high-level trajectory abstractions, HiT-JEPA learns features that remain invariant to noise and sparse sampling, yielding more robust and accurate representations for sparsely and irregularly sampled trajectories even with limited training data. On GeoLife, we obtain mean ranks comparable to T-JEPA (only 2.8% higher), and we rank second overall on Porto. This is because Porto trajectories lie in an especially dense spatial region, allowing TrajCL to exploit auxiliary cues such as movement speed and orientation to tease apart nearly identical paths. However, reliance on these cues undermines generalization to lower-quality trajectories (e.g., T-Drive) and knowledge transfer to other cities.

Next, we evaluate zero-shot performance on TKY, NYC, and AIS(AU). HiT-JEPA consistently achieves the lowest mean ranks across all database sizes, downsampling rates, and distortion rates. Both TKY and NYC consist of highly sparse and coarse check-in sequences that lack dense trajectory waypoints, which challenges the models’ summarization ability. Benefiting from its hierarchical structure, HiT-JEPA first summarizes mobility patterns at a coarse level and then refines the check-in details at finer levels. Crucially, this summarization knowledge is transferred from the dense urban trajectories in Porto, demonstrating that HiT-JEPA learns more

generalizable representations than TrajCL by capturing more essential spatiotemporal information from trajectories. Even on AIS(AU), whose trajectories span ocean-wide scales, HiT-JEPA still maintains the lowest overall mean ranks, demonstrating its ability to handle diverse trajectory types that spread across various regional scales. By contrast, although CLEAR outperforms TrajCL on T-Drive and GeoLife, it generalizes poorly in the zero-shot experiments on TKY, NYC, and AIS(AU); BLUE behaves similarly, and despite being the most training-efficient method (Table 4), it is markedly less robust to downsampling and distortion and transfers poorly across domains. TrjSR exhibits the weakest overall performance across all datasets, because image-based representations struggle to distinguish fine-grained trajectory differences, a difficulty further exacerbated by lower data quality (e.g., T-Drive). Being training-free, the non-learned measures (EDR, LCSS, Hausdorff, and Fréchet) apply the same fixed geometric rules to every dataset and trail all learned methods by a large margin. Their behavior is also inconsistent across datasets: Hausdorff and Fréchet are competitive only on the dense, regularly sampled Porto and GeoLife, whereas EDR and LCSS degrade severely. Lacking any learned invariance, they cannot adapt to downsampling or distortion and cannot exploit dataset-specific structure, which leads to consistently high ranks across all six datasets.

4.4.2 Downstream Fine-tuning. To evaluate the generalization ability of HiT-JEPA, we conduct downstream fine-tuning on its learned representations. Specifically, we retrieve and freeze the encoder of HiT-JEPA and other baselines, concatenated with a 2-layer MLP decoder, then train the decoder to approximate the computed trajectory similarities by heuristic approaches. This setting is first proposed by TrajCL [7], then followed by T-JEPA [23], to quantitatively assess whether the learned representations can generalize to approach the computational processes underlying each heuristic measure. In real applications, fine-tuned models can act as efficient, “fast” approximations of traditional heuristic measures, alleviating their quadratic time-complexity bottleneck. We report hit ratios HR@5 and HR@20 to evaluate the correct matches between top-5 predictions and each of the top-5 and top-20 ground truths. We also report the recall R5@20 to evaluate the correct matches of top-5 ground truths from predicted top-20 predictions. We approximate all model representations to 4 heuristic measures: EDR, LCSS, Hausdorff, and Discrete Fréchet. We do not include TrjSR here as its results are proven to be less competitive in [7].

From Table 3, HiT-JEPA achieves the highest overall performance. The “Average” column reports the mean over all twelve metrics for each model on each dataset. HiT-JEPA outperforms T-JEPA, the strongest baseline, by 21.4% on T-Drive and 7.2% on GeoLife, while essentially matching it on Porto (within 0.2%). On T-Drive, HiT-JEPA surpasses T-JEPA on all four distance measures, with the largest gains on Hausdorff and discrete Fréchet (relative average improvements of 38.8% and 31.7%, respectively), indicating that the hierarchical design is especially beneficial for the sparse and irregularly sampled taxi trajectories in T-Drive. On GeoLife, HiT-JEPA exceeds T-JEPA on every per-measure average—by 5.1%, 3.0%, 5.2%, and 14.7% on EDR, LCSS, Hausdorff, and Fréchet—and trails only on a few individual sub-metrics (e.g., HR@5 under EDR and Fréchet). On Porto, HiT-JEPA is on par with T-JEPA overall (0.508 vs.

0.509), outperforming it on EDR, LCSS, and Fréchet (+1.9%, +1.1%, and +4.4% on average) and trailing only on the Hausdorff measure (−6.3%).

4.5 Training Efficiency

We compare HiT-JEPA with baselines in terms of training time per iteration in Table 4. Although HiT-JEPA is not among the fastest methods, its per-iteration time (0.341 s) stays close to other JEPA-based baselines and avoids the heavy cost of TrjSR, indicating that the hierarchical structure does not impose a substantial efficiency penalty. Moreover, by incorporating convolution-based trajectory semantics aggregation and learning on multi-level trajectory abstractions with 1-layer Transformer backbones, HiT-JEPA remains efficient while achieving generalizable and robust performance.

4.6 Visualizations of HiT-JEPA embeddings.


HiT-JEPA encodes and predicts trajectory information only in the representation space, making it more difficult than generative models such as MAE [17] to evaluate the learned representation quality at the data level. To assess and gauge the validity of the representations of HiT-JEPA, we project the encoded $S^{(1)}$ from $E_\theta^{(1)}$ (on full trajectories) and predicted $\tilde{S}^{(1)}$ from $D_\phi^{(1)}$ (on masked trajectories) back onto the hexagonal grid at their GPS coordinates for visual comparisons.

First, we freeze the context encoders and predictors across all levels in a pre-trained HiT-JEPA. Then we encode and predict the masked trajectory representations to simulate the training process, and encode the full trajectory representations to simulate the inference process. Next, we concatenate and tune a 2-layer MLP for each of the representations to decode to the hexagonal grid cell embeddings to which they belong. We denote the decoded predicted masked trajectory representations as S_1 and the decoded encoded full trajectory representations as S_2 . Finally, for each trajectory position, we search for the k most similar embeddings in the spatial region embedding set $\mathcal{H}$ and retrieve their hexagonal cell IDs. We choose $k = 3$ in our visualizations.


Fig. 3a shows the comparisons between decoded cells (orange hexagons) and masked points (gray points) labeled as “targets”. The decoded locations lie in close proximity to their corresponding masked targets, confirming that the model effectively learns accurate representations for masked points during training. Fig. 3b overlays the decoded cells (green hexagons) on each blue trajectory point, demonstrating that the model can encode each point with even greater accuracy with access to the full trajectory during inference. We further visualize the clustering of HiT-JEPA embeddings in A.3.

4.7 Hierarchical attention interpretation.

From Fig. 4, by corroborating the raw attention map, deviation heatmap, and statistical profiles, we identify three distinct semantic phases localized within the bottom-left, top-right, and middle regions around the 20th trajectory point. These phases correspond to the peak intensity of attention allocated to specific trajectory segments: the origin anchoring (red boxes), the local attention peak triggered by a pattern change (orange boxes), and the destination intent (green boxes). This spatial-semantic alignment confirms that HiT-JEPA successfully learns the critical semantic waypoints from

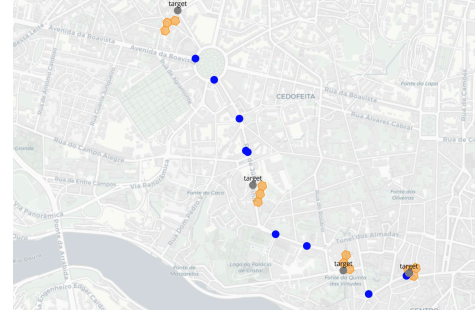

(a) Predicted masked points

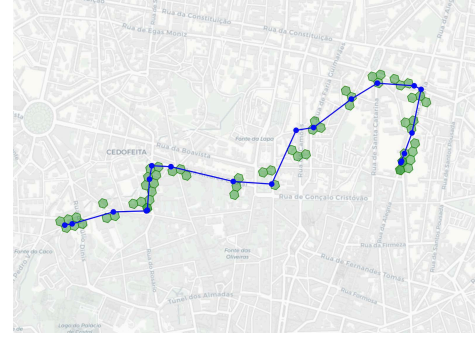

(b) Encoded full trajectory

Figure 3: Visualizations of decoded learned trajectory representations by HiT-JEPA on hexagonal cells: (a) blue points are sampled trajectory points, gray points are masked trajectory points labeled with “target”, and orange hexagons are projected predictions. (b) blue points are full trajectory points, green hexagons are projected encoded representations.

raw GPS tracks and verifies the interpretability of its learned representations. By comparing the raw attention weights across 3 JEPA layers in Fig. 5, it is obvious to discern a coarse-to-fine attention evolution, where the A^3 layer highly summarizes the trajectory origin-destination patterns and is fused into lower layers with more smoothed local details. This validates that HiT-JEPA learns consistent trajectory semantics through the hierarchical interactions while preserving distinct layer-specific granularity.



The attention weights in Fig. 6 demonstrate functional specialization among attention heads. For example, Head 3 focuses on local kinematics, while Heads 2, 4, 6, and 8 act as global anchors that attend to long-term trajectory semantics. This diversity ensures a comprehensive representation that integrates fine-grained motion dynamics with high-level trip intent.

4.8 Ablation Study

We study the effect of removing the key designs in HiT-JEPA. We compare HiT-JEPA with 4 variants: 1) **HiT_emb** which replaces the hierarchical interaction method from attention upsampling to directly concatenate the upsampled encoder embeddings between $S^{(l)}$ and $S^{(l-1)}$. 2) **HiT_single_layer** where we only level $l = 1$ to train and predict. 3) **HiT_no_attn** with no hierarchical interactions between each pair of successive layers. 4) **HiT_rect** with the spatial location tokenization method changed to rectangular

Table 3: Comparisons with fine-tuning 2-layer MLP decoder. Bold values are the lowest mean ranks and underlined values are the second lowest.

Dataset	Method	EDR			LCSS			Hausdorff			Fréchet			Average
		HR@5↑	HR@20↑	R5@20↑	HR@5↑	HR@20↑	R5@20↑	HR@5↑	HR@20↑	R5@20↑	HR@5↑	HR@20↑	R5@20↑	
Porto	TrajCL	0.137	0.179	0.301	0.329	0.508	0.663	0.456	0.574	0.803	0.412	0.526	0.734	0.468
	TrjSR	0.085	0.083	0.157	0.162	0.197	0.292	0.166	0.192	0.304	0.157	0.173	0.288	0.188
	CLEAR	0.078	0.075	0.142	0.164	0.198	0.293	0.152	0.131	0.232	0.192	0.165	0.316	0.178
	T-JEPA	0.154	0.194	0.336	0.365	0.551	0.713	0.525	0.633	0.869	0.433	0.565	0.771	0.509
	BLUE	0.077	0.119	0.175	0.197	0.354	0.461	0.335	0.477	0.668	0.384	0.538	0.741	0.377
	HiT-JEPA	0.163	0.197	0.337	0.369	0.558	0.720	0.466	0.599	0.835	0.450	0.587	0.810	0.508
T-Drive	TrajCL	0.094	0.131	0.191	0.159	0.289	0.366	0.173	0.256	0.356	0.138	0.187	0.274	0.218
	TrjSR	0.076	0.068	0.114	0.076	0.080	0.118	0.095	0.090	0.143	0.098	0.094	0.145	0.100
	CLEAR	0.093	0.084	0.143	0.126	0.166	0.216	0.142	0.158	0.243	0.135	0.170	0.283	0.163
	T-JEPA	0.094	0.147	0.215	0.205	0.366	0.469	0.158	0.229	0.329	0.125	0.159	0.249	0.229
	BLUE	0.021	0.067	0.074	0.051	0.141	0.171	0.183	0.312	0.387	0.197	0.311	0.404	0.193
	HiT-JEPA	0.112	0.170	0.260	0.221	0.384	0.493	0.222	0.316	0.456	0.158	0.219	0.325	0.278
GeoLife	TrajCL	0.193	0.363	0.512	0.232	0.484	0.584	0.479	0.536	0.745	0.398	0.463	0.708	0.475
	TrjSR	0.138	0.246	0.443	0.229	0.330	0.479	0.492	0.439	0.692	0.383	0.362	0.614	0.404
	CLEAR	0.175	0.164	0.311	0.224	0.224	0.342	0.347	0.308	0.499	0.397	0.273	0.539	0.320
	T-JEPA	0.195	0.383	0.527	0.242	0.515	0.586	0.606	0.656	0.857	0.488	0.406	0.731	0.516
	BLUE	0.143	0.272	0.358	0.226	0.470	0.480	0.395	0.647	0.630	0.459	0.647	0.674	0.450
	HiT-JEPA	0.183	0.414	0.564	0.250	0.525	0.609	0.643	0.700	0.885	0.467	0.555	0.842	0.553

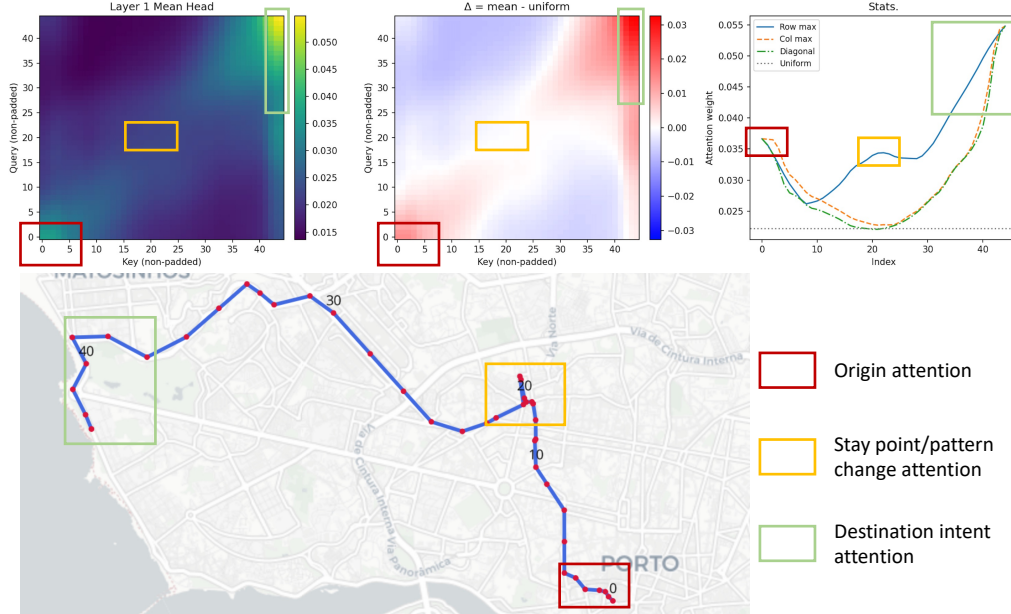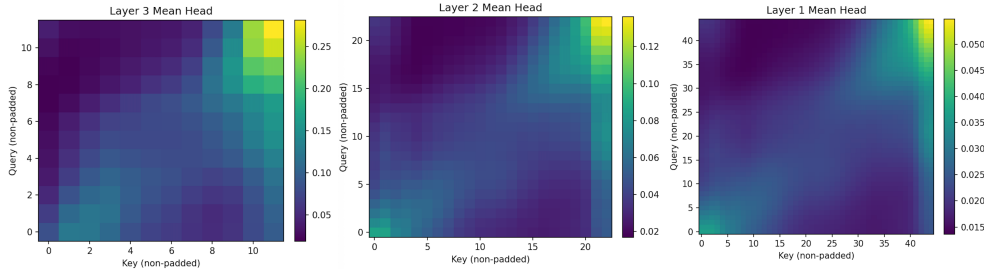**Figure 4: A case study of hierarchical semantic information captured by HiT-JEPA. (Top-Left) The raw attention map visualizes the absolute attention weights, showing the overall intensity distribution. (Top-Mid) The deviation heatmap by displaying areas of active focus (red) versus suppression (blue) relative to the mean attention value. (Top-Right) The statistical profiles quantify the peak attention intensity at each time step. Bottom The corresponding physical trajectory with index labeled every 10 steps, where colored boxes ground the salient attention regions identified in the top row.****Figure 5: Averaged attention weight visualizations at each JEPA layer. Left to right: $A^{(3)}$ to $A^{(1)}$.**

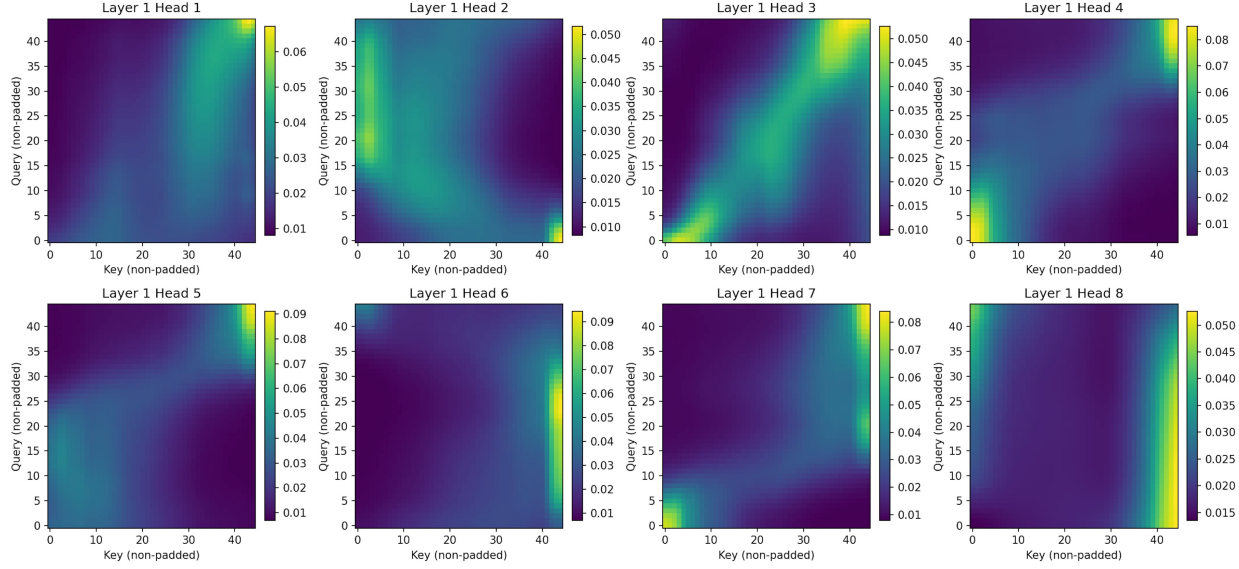
Figure 6: Visualization of each of the 8 attention heads at the JEPa layer $A^{(1)}$.

Table 4: Comparison of training efficiency (seconds per iter.).

Method	TrajCL	TrjSR	CLEAR	T-JEPa	BLUE	HiT-JEPa
Time (s)	0.196	0.476	0.292	0.303	0.166	0.341

Table 5: Ablation Study of HiT-JEPa on Porto

Varying DB Size $ D $					
Model	20%	40%	60%	80%	100%
HiT_emb	106.568	209.746	297.919	394.111	497.064
HiT_sl	1.031	1.061	1.066	1.077	1.091
HiT_no_at	1.026	1.049	1.054	1.062	1.069
HiT_rect	1.032	1.062	1.069	1.080	1.093
HiT-JEPa	1.026	1.043	1.048	1.058	1.065
Downsampling Rate ρ_s					
Model	0.1	0.2	0.3	0.4	0.5
HiT_emb	569.322	706.831	1004.246	2047.699	2171.331
HiT_sl	1.378	2.659	5.626	14.123	26.875
HiT_no_at	1.405	2.867	5.761	17.143	27.324
HiT_rect	1.508	3.054	7.735	18.912	36.768
HiT-JEPa	1.369	2.624	5.541	13.773	28.806
Distortion Rate ρ_d					
Model	0.1	0.2	0.3	0.4	0.5
HiT_emb	502.259	503.876	506.333	507.738	507.082
HiT_sl	1.088	1.099	1.120	1.100	1.137
HiT_no_at	1.079	1.095	1.105	1.093	1.120
HiT_rect	1.095	1.111	1.123	1.122	1.124
HiT-JEPa	1.074	1.077	1.085	1.093	1.119

grid cells. We train these variants and conduct self-similarity experiments on Porto. Table 5 shows the comparisons between HiT-JEPa

and its variants. The performance drops without any key designs, especially for HiT_emb, as directly concatenating the embedding from the previous layers causes representation collapse. Results from the other two variants demonstrate that in our model design, even though each layer of JEPa^l can learn individually, the hierarchical interactions bind different levels into a cohesive multi-scale structure. We also conduct hyperparameter sensitivity analyses on key model settings in A.2.

5 Conclusion

HiT-JEPa introduces a unified three-layer hierarchy that captures point-level fine-grained details, intermediate trajectory patterns, and high-level trajectory semantics within a single self-supervised framework. By leveraging a Hierarchical JEPa, it enables more powerful trajectory feature extraction in the representation space and produces cohesive multi-granular embeddings. Extensive evaluations on diverse urban and maritime trajectory datasets show that HiT-JEPa outperforms single-scale self-supervised methods in trajectory similarity computation, particularly in zero-shot generalization and downstream fine-tuning, validating its effectiveness and robustness for real-world, large-scale trajectory modeling.

Currently, HiT-JEPa realizes hierarchical interaction through attention-weight upsampling and fusion, an approach tailored to Transformer-based JEPa models. A promising direction for future work is to generalize it into a unified framework in which architectures such as Mamba or LSTMs can plug in their own hierarchy modules under a consistent multi-level paradigm. Beyond standalone retrieval, HiT-JEPa can also serve as an efficient retrieval backend for LLM-based agents, providing similarity-preserving trajectory embeddings at a scale and cost that language models cannot match.

Acknowledgments

We acknowledge the resources and services from the National Computational Infrastructure (NCI), which is supported by the Australian Government.

References

- [1] Helmut Alt and Michael Godau. 1995. Computing the Fréchet distance between two polygonal curves. *International Journal of Computational Geometry & Applications* 5, 01n02 (1995), 75–91.
- [2] Mahmoud Assran, Quentin Duval, Ishan Misra, Piotr Bojanowski, Pascal Vincent, Michael Rabbat, Yann LeCun, and Nicolas Ballas. 2023. Self-supervised learning from images with a joint-embedding predictive architecture. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 15619–15629.
- [3] Lei Bai, Lina Yao, Can Li, Xianzhi Wang, and Can Wang. 2020. Adaptive graph convolutional recurrent network for traffic forecasting. *Advances in neural information processing systems* 33 (2020), 17804–17815.
- [4] Adrien Bardes, Quentin Garrido, Jean Ponce, Xinlei Chen, Michael Rabbat, Yann LeCun, Mido Assran, and Nicolas Ballas. 2023. V-jepa: Latent video prediction for visual representation learning. (2023).
- [5] Adrien Bardes, Jean Ponce, and Yann LeCun. 2021. Vicreg: Variance-invariance-covariance regularization for self-supervised learning. *arXiv preprint arXiv:2105.04906* (2021).
- [6] Hanlin Cao, Haina Tang, Yulei Wu, Fei Wang, and Yongjun Xu. 2021. On accurate computation of trajectory similarity via single image super-resolution. In *2021 International Joint Conference on Neural Networks (IJCNN)*. IEEE, 1–9.
- [7] Yanchuan Chang, Jianzhong Qi, Yuxuan Liang, and Egemen Tanin. 2023. Contrastive trajectory similarity learning with dual-feature attention. In *2023 IEEE 39th International conference on data engineering (ICDE)*. IEEE, 2933–2945.
- [8] Lei Chen and Raymond Ng. 2004. On the marriage of lp-norms and edit distance. In *Proceedings of the Thirtieth international conference on Very large data bases-Volume 30*. 792–803.
- [9] Lei Chen, M Tamer Özsu, and Vincent Oria. 2005. Robust and fast similarity search for moving object trajectories. In *Proceedings of the 2005 ACM SIGMOD international conference on Management of data*. 491–502.
- [10] Richard J Chen, Chengkuan Chen, Yicong Li, Tiffany Y Chen, Andrew D Trister, Rahul G Krishnan, and Faisal Mahmood. 2022. Scaling vision transformers to gigapixel images via hierarchical self-supervised learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 16144–16155.
- [11] Yile Chen, Xiucheng Li, Gao Cong, Zhifeng Bao, Cheng Long, Yiding Liu, Arun Kumar Chandran, and Richard Ellison. 2021. Robust road network representation learning: When traffic patterns meet traveling semantics. In *Proceedings of the 30th ACM International Conference on Information & Knowledge Management*. 211–220.
- [12] Zebin Chen, Xiaolin Xiao, Yue-Jiao Gong, Jun Fang, Nan Ma, Hua Chai, and Zhiguang Cao. 2022. Interpreting trajectories from multiple views: A hierarchical self-attention network for estimating the time of arrival. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*. 2771–2779.
- [13] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 conference of the North American chapter of the association for computational linguistics: human language technologies, volume 1 (long and short papers)*. 4171–4186.
- [14] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xi-aohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. 2020. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929* (2020).
- [15] Ziquan Fang, Yuntao Du, Lu Chen, Yujia Hu, Yunjun Gao, and Gang Chen. 2021. E 2 dtc: An end to end deep trajectory clustering framework via self-training. In *2021 IEEE 37th International Conference on Data Engineering (ICDE)*. IEEE, 696–707.
- [16] Aditya Grover and Jure Leskovec. 2016. node2vec: Scalable feature learning for networks. In *Proceedings of the 22nd ACM SIGKDD international conference on Knowledge discovery and data mining*. 855–864.
- [17] Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. 2022. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 16000–16009.
- [18] Sepp Hochreiter and Jürgen Schmidhuber. 1997. Long short-term memory. *Neural computation* 9, 8 (1997), 1735–1780.
- [19] Lingjing Kong, Martin Q Ma, Guangyi Chen, Eric P Xing, Yuejie Chi, Louis-Philippe Morency, and Kun Zhang. 2023. Understanding masked autoencoders via hierarchical latent variable models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 7918–7928.
- [20] Yann LeCun. 2022. A path towards autonomous machine intelligence version 0.9. 2, 2022-06-27. *Open Review* 62, 1 (2022), 1–62.
- [21] Dongyang Li, Taolin Zhang, Nan Hu, Chengyu Wang, and Xiaofeng He. 2022. HiCLRE: A hierarchical contrastive learning framework for distantly supervised relation extraction. *arXiv preprint arXiv:2202.13352* (2022).
- [22] Jialiang Li, Tiantian Liu, and Hua Lu. 2024. CLEAR: Ranked Multi-Positive Contrastive Representation Learning for Robust Trajectory Similarity Computation. In *2024 25th IEEE International Conference on Mobile Data Management (MDM)*. IEEE, 21–30.
- [23] Lihuan Li, Hao Xue, Yang Song, and Flora Salim. 2024. T-JEPA: A Joint-Embedding Predictive Architecture for Trajectory Similarity Computation. In *Proceedings of the 32nd ACM International Conference on Advances in Geographic Information Systems*. 569–572.
- [24] Xiucheng Li, Kaiqi Zhao, Gao Cong, Christian S Jensen, and Wei Wei. 2018. Deep representation learning for trajectory similarity computation. In *2018 IEEE 34th international conference on data engineering (ICDE)*. IEEE, 617–628.
- [25] Yan Lin, Huaiyu Wan, Shengnan Guo, Jilin Hu, Christian S Jensen, and Youfang Lin. 2023. Pre-training general trajectory embeddings with maximum multi-view entropy coding. *IEEE Transactions on Knowledge and Data Engineering* 36, 12 (2023), 9037–9050.
- [26] Xiang Liu, Xiaoying Tan, Yuchun Guo, Yishuai Chen, and Zhe Zhang. 2022. Cstrm: Contrastive self-supervised trajectory representation model for trajectory similarity computation. *Computer Communications* 185 (2022), 159–167.
- [27] Tomas Mikolov, Kai Chen, Greg Corrado, and Jeffrey Dean. 2013. Efficient estimation of word representations in vector space. *arXiv preprint arXiv:1301.3781* (2013).
- [28] Tangwen Qian, Junhe Li, Yile Chen, Gao Cong, Tao Sun, Fei Wang, and Yongjun Xu. 2024. Context-Enhanced Multi-View Trajectory Representation Learning: Bridging the Gap through Self-Supervised Models. *arXiv preprint arXiv:2410.13196* (2024).
- [29] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems* 30 (2017).
- [30] Chao Wang, Fangzheng Lyu, Sensen Wu, Yuanyuan Wang, Liuchang Xu, Feng Zhang, Shaowen Wang, Yongheng Wang, and Zhenhong Du. 2022. A deep trajectory clustering method based on sequence-to-sequence autoencoder model. *Transactions in GIS* 26, 4 (2022), 1801–1820.
- [31] Fanyi Xiao, Kaustav Kundu, Joseph Tighe, and Davide Modolo. 2022. Hierarchical self-supervised representation learning for movie understanding. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 9727–9736.
- [32] Chuang Yang, Renhe Jiang, Xiaohang Xu, Chuan Xiao, and Kaoru Sezaki. 2024. SIMformer: Single-Layer Vanilla Transformer Can Learn Free-Space Trajectory Similarity. *arXiv preprint arXiv:2410.14629* (2024).
- [33] Dingqi Yang, Daqing Zhang, Vincent W Zheng, and Zhiyong Yu. 2014. Modeling user activity preference by leveraging user spatial temporal characteristics in LBSNs. *IEEE Transactions on Systems, Man, and Cybernetics: Systems* 45, 1 (2014), 129–142.
- [34] Peilun Yang, Hanchen Wang, Ying Zhang, Lu Qin, Wenjie Zhang, and Xuemin Lin. 2021. T3s: Effective representation learning for trajectory similarity computation. In *2021 IEEE 37th international conference on data engineering (ICDE)*. IEEE, 2183–2188.
- [35] Di Yao, Gao Cong, Chao Zhang, and Jingping Bi. 2019. Computing trajectory similarity in linear time: A generic seed-guided neural metric learning approach. In *2019 IEEE 35th international conference on data engineering (ICDE)*. IEEE, 1358–1369.
- [36] Di Yao, Jin Wang, Wenjie Chen, Fangda Guo, Peng Han, and Jingping Bi. 2024. Deep dirichlet process mixture model for non-parametric trajectory clustering. In *2024 IEEE 40th International Conference on Data Engineering (ICDE)*. IEEE, 4449–4462.
- [37] Di Yao, Chao Zhang, Zhihua Zhu, Jianhui Huang, and Jingping Bi. 2017. Trajectory clustering via deep representation learning. In *2017 international joint conference on neural networks (IJCNN)*. IEEE, 3880–3887.
- [38] Byoung-Kee Yi, Hosagrahar V Jagadish, and Christos Faloutsos. 1998. Efficient retrieval of similar time sequences under time warping. In *Proceedings 14th International Conference on Data Engineering*. IEEE, 201–208.
- [39] Bing Yu, Haoteng Yin, and Zhanxing Zhu. 2017. Spatio-temporal graph convolutional networks: A deep learning framework for traffic forecasting. *arXiv preprint arXiv:1709.04875* (2017).
- [40] Jing Yuan, Yu Zheng, Xing Xie, and Guangzhong Sun. 2011. Driving with knowledge from the physical world. In *Proceedings of the 17th ACM SIGKDD international conference on Knowledge discovery and data mining*. 316–324.
- [41] Jing Yuan, Yu Zheng, Chengyang Zhang, Wenlei Xie, Xing Xie, Guangzhong Sun, and Yan Huang. 2010. T-drive: driving directions based on taxi trajectories. In *Proceedings of the 18th SIGSPATIAL International conference on advances in geographic information systems*. 99–108.
- [42] Xingxing Zhang, Furu Wei, and Ming Zhou. 2019. HIBERT: Document level pre-training of hierarchical bidirectional transformers for document summarization. *arXiv preprint arXiv:1905.06566* (2019).
- [43] Yu Zheng, Quannan Li, Yukun Chen, Xing Xie, and Wei-Ying Ma. 2008. Understanding mobility based on GPS data. In *Proceedings of the 10th international*

- conference on Ubiquitous computing. 312–321.
- [44] Yu Zheng, Xing Xie, Wei-Ying Ma, et al. 2010. GeoLife: A collaborative social networking service among user, location and trajectory. *IEEE Data Eng. Bull.* 33, 2 (2010), 32–39.
- [45] Yu Zheng, Lizhu Zhang, Xing Xie, and Wei-Ying Ma. 2009. Mining interesting locations and travel sequences from GPS trajectories. In *Proceedings of the 18th international conference on World wide web*. 791–800.
- [46] Silin Zhou, Yao Chen, Shuo Shang, Lisi Chen, Bingsheng He, and Ryosuke Shibasaki. 2025. Blurred Encoding for Trajectory Representation Learning. *arXiv preprint arXiv:2511.13741* (2025).
- [47] Yuanshao Zhu, James Jianqiao Yu, Xiangyu Zhao, Xuetao Wei, and Yuxuan Liang. 2024. Unitraj: Learning a universal trajectory foundation model from billion-scale worldwide traces. *CoRR* (2024).

A Appendix

A.1 Experimental Settings

A.1.1 Self-similarity. For each query trajectory $q \in Q$, we create two sub-trajectories $q_a = \{p_1, p_3, p_5, \dots\}$ containing the odd-indexed points and $q_b = \{p_2, p_4, p_6, \dots\}$ even-indexed points of q . We separate them by putting q_a into the query set Q and putting q_b into the database D , with the rest of the trajectories in D randomly filled from the testing set. Each q_a and q_b pair exhibits similar overall patterns in terms of shape, length, and sampling rate. We apply HiT-JEPA context-encoders to both query and database trajectories, compute pairwise similarities, and sort the results in descending order. Next, we report the mean rank of each q_b when retrieved by its corresponding query q_a : ideally, the true match appears at rank one. We choose $\{20\%, 40\%, 60\%, 80\%, 100\%\}$ of the total database size $|D|$ for evaluation. To further evaluate the robustness of learned trajectory representations, we also apply down-sampling and distortion on Q and D . Specifically, we randomly mask points (with start and end points kept) with down-sampling probability ρ_s and shift the point coordinates with distortion probability ρ_d . Both ρ_s and ρ_d represent the number of points to be down-sampled or distorted, ranging from $\{0.1, 0.2, 0.3, 0.4, 0.5\}$.

For the convenience of comparing results under these settings together, we denote meta ratio $R_i = \{|D|_i, \rho_{s_i}, \rho_{d_i}\}$ and compare the **mean rank** of all models at each R_i on each dataset, smaller values are better.

A.2 Hyperparameter Analysis

We analyze the impact of two sets of hyperparameters with the implementation and experimental settings.

Number of attention layers at each abstraction level. We change the number of Transformer encoder layers for each level to 2 and 3, then compare them with the default setting (1 layer) for self-similarity search with varying $|D|$, ρ_s and ρ_d on Porto. From Fig. 7, we can find that with only 1 attention layer, we can achieve the lowest mean ranks for all settings. This is due to higher chances of overfitting with more attention layers.

Weighting coefficient for the multi-level loss $\mathcal{L}$. The values of the loss weighting coefficients λ , μ , and ν are carefully tuned. In Table 6, 7, and 8, we compare our selected coefficients with other 3 sets of parameters in a wide range on the Porto dataset. From the tables,

we can see that HiT-JEPA is robust against various loss combinations. Even though the loss coefficients with λ , μ , and ν equal to 0.33, 0.33, and 0.33 perform better on the downsampling experiment, our selected combination with $\lambda = 0.05$, $\mu = 0.15$, and $\nu = 0.8$

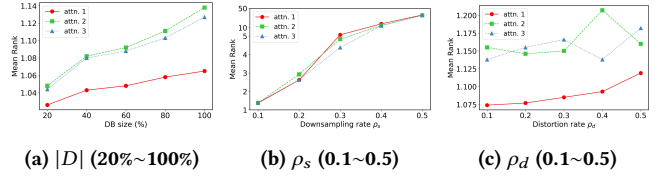


Figure 7: Effect of different numbers of attention layers at each abstraction level.

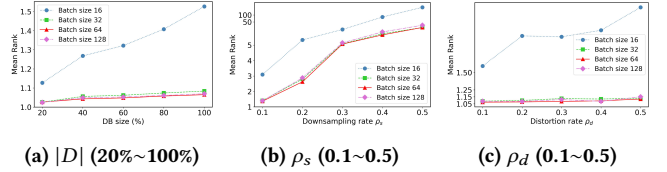


Figure 8: Effect of different batch sizes.

still learns overall the most accurate, stable, and consistent results across all experimental settings.

Table 6: Loss weighting coefficients for varying DB sizes $|D|$.

λ	μ	ν	20%	40%	60%	80%	100%
0.1	0.2	0.7	1.026	1.050	1.056	1.067	1.079
0.33	0.33	0.33	1.036	1.072	1.080	1.102	1.120
0.6	0.3	0.1	1.035	1.063	1.066	1.079	1.099
0.05	0.15	0.8	1.026	1.043	1.048	1.058	1.065

Table 7: Loss weighting coefficients for varying downsampling rates ρ_s .


λ	μ	ν	0.1	0.2	0.3	0.4	0.5
0.1	0.2	0.7	1.334	2.844	5.868	13.864	25.009
0.33	0.33	0.33	1.393	2.664	4.616	11.210	20.730
0.6	0.3	0.1	1.449	2.763	5.629	14.104	23.985
0.05	0.15	0.8	1.369	2.624	5.541	13.773	28.806

A.3 Representation visualization via clustering

We cluster and visualize the embedding of 3000 random trajectories in Porto in Fig. 9. We use a K-Means Clusterer with a number of cluster centers $K = 6$ acquired from the Elbow Method. We can find that, although the boundaries between clusters are soft without a specific self-clustering design in recent clustering methods [15, 37], distinct semantic groups are clearly visually discernible. This demonstrates the strong potential of HiT-JEPA, which is trained on regression loss, to be fine-tuned to generalize to multiple trajectory tasks.

Table 8: Loss weighting coefficients for varying distortion rates ρ_d .

λ	μ	ν	0.1	0.2	0.3	0.4	0.5
0.1	0.2	0.7	1.081	1.109	1.095	1.115	1.135
0.33	0.33	0.33	1.130	1.138	1.133	1.152	1.196
0.6	0.3	0.1	1.092	1.107	1.133	1.117	1.191
0.05	0.15	0.8	1.074	1.077	1.085	1.093	1.119

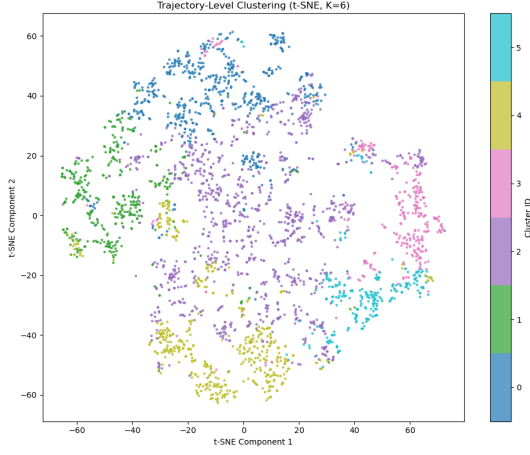**Figure 9: t-SNE visualization of trajectory embeddings.**

A.4 Ethics Statement

We claim that we adhere to the ACM Publications Policies. All the datasets used in the manuscript are publicly available with no user information revealed. HiT-JEPA encodes the trajectory location information in hexagonal cell tokens, where exact GPS traces are blurred. And such tokens are the only input to our model, thereby preventing any leakage of precise location data. The code for all baselines is publicly available and used under their respective licenses.

Received 20 February 2007; revised 12 March 2009; accepted 5 June 2009