

Advancing Lung Disease Diagnosis in 3D CT Scans

Qingqiu Li¹, Runtian Yuan¹, Junlin Hou², Jilan Xu¹,
Yuejie Zhang¹, Rui Feng¹, Hao Chen²

¹ Fudan University

² The Hong Kong University of Science and Technology

Abstract

To enable more accurate diagnosis of lung disease in chest CT scans, we propose a straightforward yet effective model. Firstly, we analyze the characteristics of 3D CT scans and remove non-lung regions, which helps the model focus on lesion-related areas and reduces computational cost. We adopt ResNeSt50 as a strong feature extractor, and use a weighted cross-entropy loss to mitigate class imbalance, especially for the underrepresented squamous cell carcinoma category. Our model achieves a Macro F1 Score of 0.80 on the validation set of the Fair Disease Diagnosis Challenge, demonstrating its strong performance in distinguishing between different lung conditions.

1. Introduction

Lung disease remains a leading global health concern, with lung cancer and COVID-19 posing significant challenges to accurate diagnosis. Lung cancer, particularly non-small cell lung cancer, is one of the most prevalent and deadly malignancies worldwide. Among its subtypes, adenocarcinoma and squamous cell carcinoma are the most common. COVID-19, a respiratory illness, has also caused widespread health crises and fatalities in recent years. As illustrated in Figure 1, chest CT scans have been widely used for diagnosing and monitoring affected patients, owing to their ability to provide detailed insights into the extent and severity of lung involvement. However, the large volume of CT images generated places a heavy burden on radiologists and medical professionals, making the diagnostic process increasingly challenging.

In recent years, deep learning has been widely applied to the automatic diagnosis of lung diseases using chest CT scans [1–20]. However, previous methods often decompose 3D CT volumes into individual 2D slices for analysis or adopt relatively simple network architectures trained from scratch, resulting in suboptimal classification performance. To address these limitations, we treat each CT scan as a

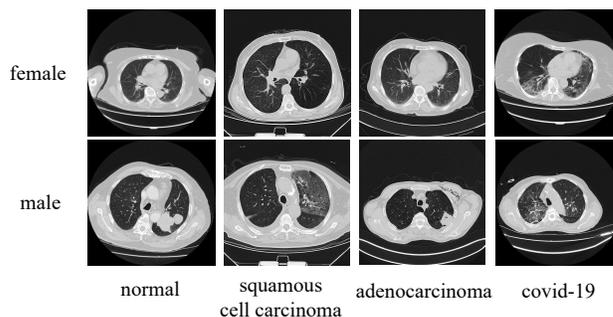


Figure 1. Samples of different lung diseases.

complete 3D volume and remove non-lung regions that do not contribute to disease identification. We then employ ResNeSt50 [21] as the backbone feature extractor and design a weighted cross-entropy loss function based on the proportion of lesion volume to address class imbalance.

Our main contributions are as follows:

1. We analyze the structural characteristics of 3D CT scans and remove irrelevant non-lung regions, enabling the model to focus on lesion-related areas and reducing computational overhead.
2. We utilize ResNeSt50 as a powerful feature extractor and introduce a lesion-aware weighted cross-entropy loss to mitigate the imbalance caused by underrepresented classes, i.e., squamous cell carcinoma.
3. Our model achieves a Macro F1 score of 0.80 on the validation set of the Fair Disease Diagnosis Challenge, demonstrating strong classification performance.

2. Methodology

The overall framework of our model is illustrated in Figure 2. We begin by analyzing the 3D CT scans to identify slices that are irrelevant for disease detection, such as the upper neck region at the beginning and the abdominal area toward the end. These non-informative slices, which do not contain lung tissue, are removed. This allows the model to

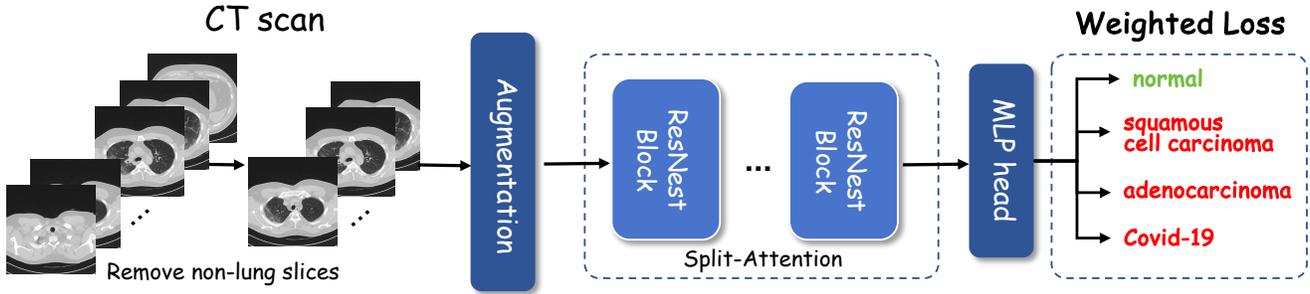


Figure 2. Overview of our framework for lung disease diagnosis.

concentrate on regions that are more relevant to lesion detection and also helps reduce computational requirements.

After this preprocessing step, we employ ResNeSt50 as our feature extractor. This architecture includes a modular split attention mechanism within its network blocks, enabling the model to capture interactions across different feature-map groups and enhance representational power. To address the issue of class imbalance in the dataset, we use a weighted cross-entropy loss \mathcal{L}_{wCE} :

$$\mathcal{L}_{wCE} = - \sum_{c=1}^C w_c \cdot y_c \cdot \log(\hat{y}_c), \quad (1)$$

where w_c represents the weight of class c , and y and \hat{y} denote the ground truth and prediction for class c , respectively. This approach gives more weight to underrepresented classes, helping the model to learn more effectively from limited samples.

3. Datasets

Set	Total	A	Covid	G	Normal
Training	330/404	125/125	100/100	5/79	100/100
Validation	78/77	25/25	20/20	13/12	20/20

Table 1. Statistics of the CT dataset, presented in the form of female/male.

We evaluate our proposed approach on the dataset provided by the Fair Disease Diagnosis Challenge. The dataset consists of chest CT scans from subjects diagnosed with lung cancer, COVID-19, or identified as healthy. Each scan is annotated to indicate whether it belongs to a healthy subject (Normal) or a subject diagnosed with Adenocarcinoma (A), Squamous Cell Carcinoma (G), or COVID-19 (Covid). Additionally, each scan includes information about the subject’s gender (male or female). Detailed data statistics are summarized in Table 1.

4. Experiments

4.1. Data Pre-Processing

Our data pre-processing procedure is as follows. All 2D chest CT scan series are composed into a 3D volume of shape (D, H, W) , where D, H, W denotes the number of slice, height, and width, respectively. Then, each 3D volume is resized to dimensions of $(64, 256, 256)$. Finally, we transform the CT volume to the interval $[0, 1]$ for intensity normalization.

4.2. Implementation Details

We utilize 3D ResNeSt50 as the backbone of our model. For training, data augmentations include random resized cropping on the transverse plane, random cropping on the vertical section to 64, rotation, and color jittering. We use the Adam algorithm [8] as our optimizer, setting the learning rate to $1e-4$ and the weight decay to $1e-5$. Our model is trained for 100 epochs on 4 RTX 3090 GPUs with a batch size of 2 per GPU. Macro F1 score is used as the evaluation metric, which calculates the F1 score for each category separately and then averages these scores to assess overall performance.

4.3. Experimental Results

Our model achieves a Macro F1 Score of 0.80 on the validation set of the Fair Disease Diagnosis Challenge, demonstrating its strong performance in distinguishing between different lung conditions.

5. Conclusion

In this work, we present a simple yet effective approach for the classification of lung diseases from chest CT scans. By removing non-lung regions from 3D volumes, our model is able to concentrate on the most relevant anatomical structures, enhancing both efficiency and accuracy. Leveraging ResNeSt50 as a powerful feature extractor, combined with a weighted cross-entropy loss to address class imbalance, our method demonstrates strong diagnostic performance.

References

- [1] Anastasios Arsenos, Dimitrios Kollias, and Stefanos Kollias. A large imaging database and novel deep neural architecture for covid-19 diagnosis. In *2022 IEEE 14th Image, Video, and Multidimensional Signal Processing Workshop (IVMSP)*, page 1–5. IEEE, 2022. 1
- [2] Anastasios Arsenos, Andjoli Davidhi, Dimitrios Kollias, Panos Prassopoulos, and Stefanos Kollias. Data-driven covid-19 detection through medical imaging. In *2023 IEEE International Conference on Acoustics, Speech, and Signal Processing Workshops (ICASSPW)*, page 1–5. IEEE, 2023.
- [3] Demetris Gerogiannis, Anastasios Arsenos, Dimitrios Kollias, Dimitris Nikitopoulos, and Stefanos Kollias. Covid-19 computer-aided diagnosis through ai-assisted ct imaging analysis: Deploying a medical ai system. In *2024 IEEE International Symposium on Biomedical Imaging (ISBI)*, pages 1–4. IEEE, 2024.
- [4] Junlin Hou, Jilan Xu, Rui Feng, Yuejie Zhang, Fei Shan, and Weiya Shi. Cmc-cov19d: Contrastive mixup classification for covid-19 diagnosis. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 454–461, 2021.
- [5] Junlin Hou, Jilan Xu, Longquan Jiang, Shanshan Du, Rui Feng, Yuejie Zhang, Fei Shan, and Xiangyang Xue. Periphery-aware covid-19 diagnosis with contrastive representation enhancement. *Pattern Recognition*, 118:108005, 2021.
- [6] Junlin Hou, Jilan Xu, Nan Zhang, Yi Wang, Yuejie Zhang, Xiaobo Zhang, and Rui Feng. Cmc_v2: Towards more accurate covid-19 detection with discriminative video priors. In *European Conference on Computer Vision*, pages 485–499. Springer, 2022.
- [7] Junlin Hou, Jilan Xu, Nan Zhang, Yuejie Zhang, Xiaobo Zhang, and Rui Feng. Boosting covid-19 severity detection with infection-aware contrastive mixup classification. In *European Conference on Computer Vision*, pages 537–551. Springer, 2022.
- [8] Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014. 2
- [9] Dimitrios Kollias, Athanasios Tagaris, Andreas Stafylopatis, Stefanos Kollias, and Georgios Tagaris. Deep neural architectures for prediction in healthcare. *Complex & Intelligent Systems*, 4(2):119–131, 2018.
- [10] Dimitrios Kollias, N Bouas, Y Vlaxos, V Brillakis, M Seferis, Ilianna Kollia, Levon Sukissian, James Wingate, and S Kollias. Deep transparent prediction through latent representation analysis. *arXiv preprint arXiv:2009.07044*, 2020.
- [11] Dimitris Kollias, Y Vlaxos, M Seferis, Ilianna Kollia, Levon Sukissian, James Wingate, and Stefanos D Kollias. Transparent adaptation in deep medical image diagnosis. In *TAILOR*, page 251–267, 2020.
- [12] Dimitrios Kollias, Anastasios Arsenos, Levon Soukissian, and Stefanos Kollias. Mia-cov19d: Covid-19 detection through 3-d chest ct image analysis. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, page 537–544, 2021.
- [13] Dimitrios Kollias, Anastasios Arsenos, and Stefanos Kollias. Ai-mia: Covid-19 detection and severity analysis through medical imaging. In *European Conference on Computer Vision*, page 677–690. Springer, 2022.
- [14] Dimitrios Kollias, Anastasios Arsenos, and Stefanos Kollias. Ai-enabled analysis of 3-d ct scans for diagnosis of covid-19 & its severity. In *2023 IEEE International Conference on Acoustics, Speech, and Signal Processing Workshops (ICASSPW)*, page 1–5. IEEE, 2023.
- [15] Dimitrios Kollias, Anastasios Arsenos, and Stefanos Kollias. A deep neural architecture for harmonizing 3-d input data analysis and decision making in medical imaging. *Neurocomputing*, 542:126244, 2023.
- [16] Dimitrios Kollias, Anastasios Arsenos, and Stefanos Kollias. Domain adaptation explainability & fairness in ai for medical image analysis: Diagnosis of covid-19 based on 3-d chest ct-scans. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4907–4914, 2024.
- [17] Dimitrios Kollias, Anastasios Arsenos, James Wingate, and Stefanos Kollias. Sam2clip2sam: Vision language model for segmentation of 3d ct scans for covid-19 detection. *arXiv preprint arXiv:2407.15728*, 2024.
- [18] David Krueger, Ethan Caballero, Joern-Henrik Jacobsen, Amy Zhang, Jonathan Binas, Dinghuai Zhang, Remi Le Priol, and Aaron Courville. Out-of-distribution generalization via risk extrapolation (rex). In *International conference on machine learning*, pages 5815–5826. PMLR, 2021.
- [19] Qingqiu Li, Runtian Yuan, Junlin Hou, Jilan Xu, Yuejie Zhang, Rui Feng, and Hao Chen. Advancing covid-19 detection in 3d ct scans. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5149–5156, 2024.
- [20] Runtian Yuan, Qingqiu Li, Junlin Hou, Jilan Xu, Yuejie Zhang, Rui Feng, and Hao Chen. Domain adaptation using pseudo labels for covid-19 detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5141–5148, 2024. 1
- [21] Hang Zhang, Chongruo Wu, Zhongyue Zhang, Yi Zhu, Haibin Lin, Zhi Zhang, Yue Sun, Tong He, Jonas Mueller, R Manmatha, et al. Resnest: Split-attention networks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 2736–2746, 2022. 1