


QM11-W Wireless Wall-Mounted Motion Sensor

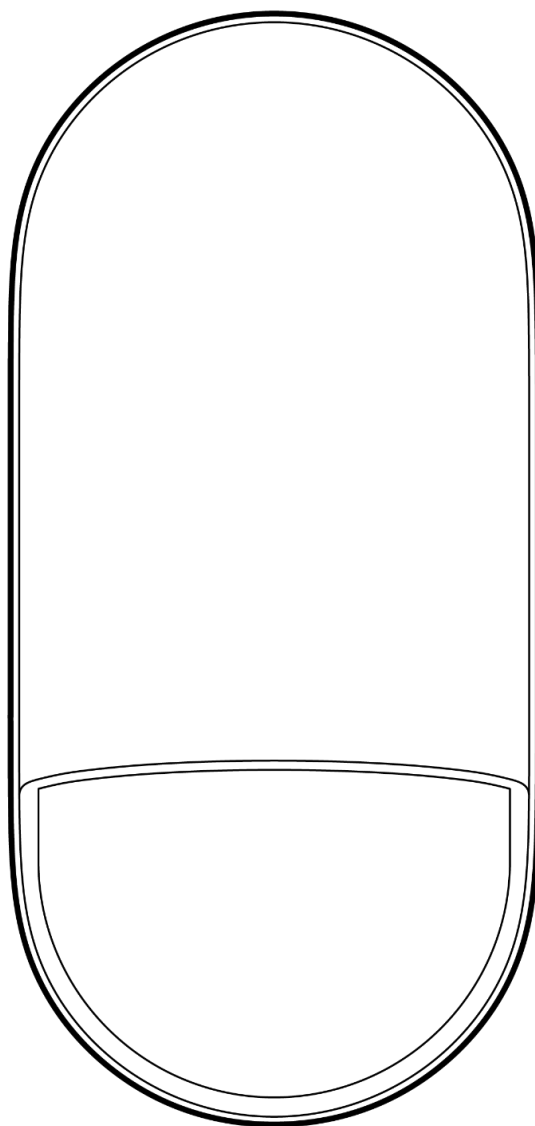

Document Details

Version

V1.2 20260805

(V1.0 published 20250919)

Firmware

Firmware version can be verified on Verkada
Command command.verkada.com.

Product Models

This install guide pertains to model QM11-W-HW.

© Copyright 2026 Verkada Inc. All rights reserved.

Verkada and the Verkada logo are registered trademarks or service marks of Verkada Inc. ("Verkada"). All other trademarks are the property of their respective owners.


Verkada may make changes to this document at any time without notice. The information presented herein may be inaccurate or outdated, and Verkada is under no obligation to maintain it. ALL INFORMATION IS PROVIDED "AS-IS" AND WITHOUT ANY WARRANTIES, IMPLIED, EXPRESS, OR OTHERWISE. VERKADA DISCLAIMS LIABILITY FOR ALL DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, ARISING OUT OF USE OF THIS DOCUMENT.

Any intellectual property rights relating to Verkada products are and shall remain Verkada's exclusive property. Use of any Verkada product is subject to Verkada's end user agreement or other executed agreement with Verkada. No license, either expressed or implied, to use or distribute any Verkada product is granted under this document.


This document may not be sold, resold, licensed or sublicensed and may not be transferred without Verkada's prior written consent. No part of this document may be reproduced in whole or in part without the express written consent of Verkada.




What's in the Box

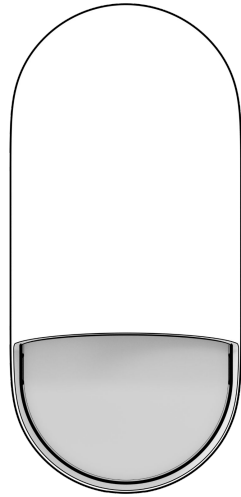


Motion Sensor




**T10 Security
Torx L-Key**



**Wood Screws (2
pcs)**



**Wall Anchors
(2 pcs)**



**L91 AA Batteries
(2 pcs)**

What you'll need

- Verkada VLink Hub
- A smartphone or laptop
- A working internet connection
- 1/8 inch (3.2mm) drill bit for pilot holes
- #2 Phillips head screwdriver/driver bit
- Two L91 AA Batteries (included)


Connect

For easy registration and setup, scan the QR code on the product.

If you prefer to manually register your product, please proceed to:

verkada.com/start

Overview

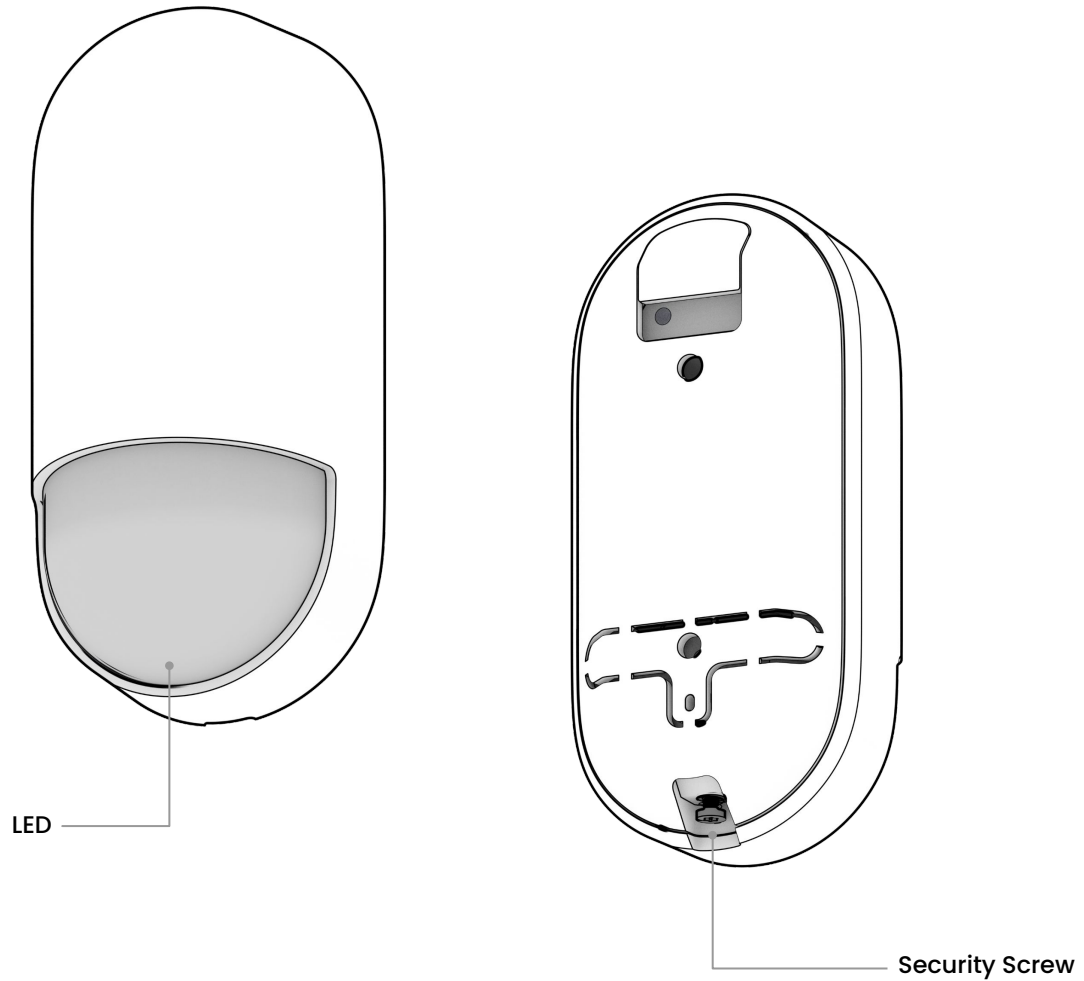

LED Behaviors

Install Mode

To enable Install mode, power cycle the device by removing the battery. The LED will remain active for 5 minutes.

- **Solid Green**
Sensor is detecting motion (PIR and Microwave).

- ☀ **Blinking Green**
Sensor is searching for a hub to connect to.

- ☀ **Blinking Red**
Sensor cannot find a hub to connect to.

Technical Specifications

Battery	2x non-rechargeable Energizer Ultimate Lithium L91 AA batteries (included). <i>*5-year typical battery life.¹</i>
RF Connectivity	VLink transceiver with internal antenna: FCC: 915~915.7MHz, ISM: 915~915.7MHz, CE: 865.5~867.5MHz, AU: 916.8~918.2MHz
RF Range	≥ 2000ft (600m) ² open field line of sight range when paired with any of Verkada's VLink capable hubs (ex: BP32, BP52, BK22, BE32, WH32, WH52).
Microwave Frequency	X-Band Radar Module operating frequency range (10.52 - 10.53 GHz).
Detection Method	Dual Technology with PIR Sensor and X-Band Microwave Radar.
Detection Range	Up to 15m (49ft) with 85 degree FOV.
Movement Detection Speed	1.0 – 8.2 ft/s (0.3 – 2.5m/s). ¹
Tamper Detection	Yes, breakaway tab.
Dimensions	4.72in (L) x 2.25in (W) x 2.03in (H) / 120mm (L) x 57mm (W) x 51.5mm (H)
Weight	5.36oz / 152g
Operating Temp. & Humidity	32°F-122°F / 0°C-50°C, 0-90% RH non-condensing

**Based on 150 motion events a day with the status LED automatically disabled following the initial walk test. Battery life may vary depending on environmental conditions and number of events per day.*

Note 1: Feature not evaluated for compliance to UL 639


Note 2: This device's recommended mounting height should be 2.5-3 meters (8.2-9.8 feet) from the floor and must be installed at a minimum signal strength of -85 dBm or better.




Installation

Preparation

Use the provided T10 Security Torx L-Key to unscrew the security screw at the bottom of the device.

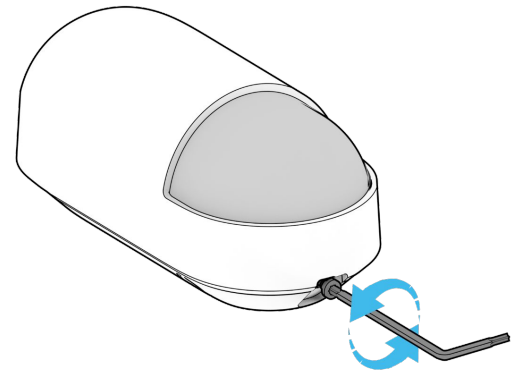

Swing the bottom of the device away from the mount plate and disengage the hook at the top of the magnet mount.

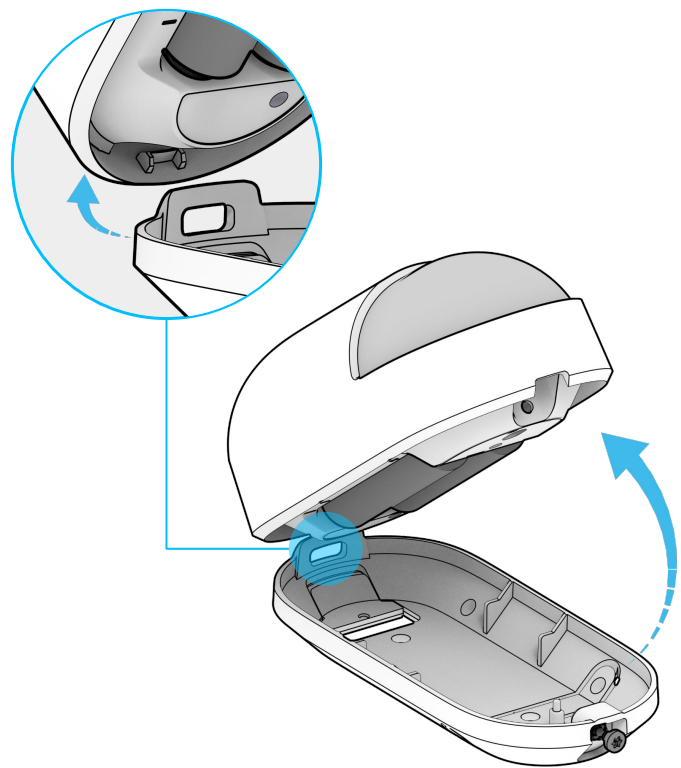

Remove the battery pull tab.




Installation

Mounting Location

The recommended position for the motion sensor should be 2.5–3 meters (8.2–9.8 feet) from the floor in the corner of a room. The sensor will detect motion up to a range of 15 meters (49 feet) at a 85 degree horizontal field of view.


** Do not install the sensor outdoors, on moving surfaces, or behind obstacles; avoid facing it toward windows, direct sunlight, heat or cold sources, or moving fans.*

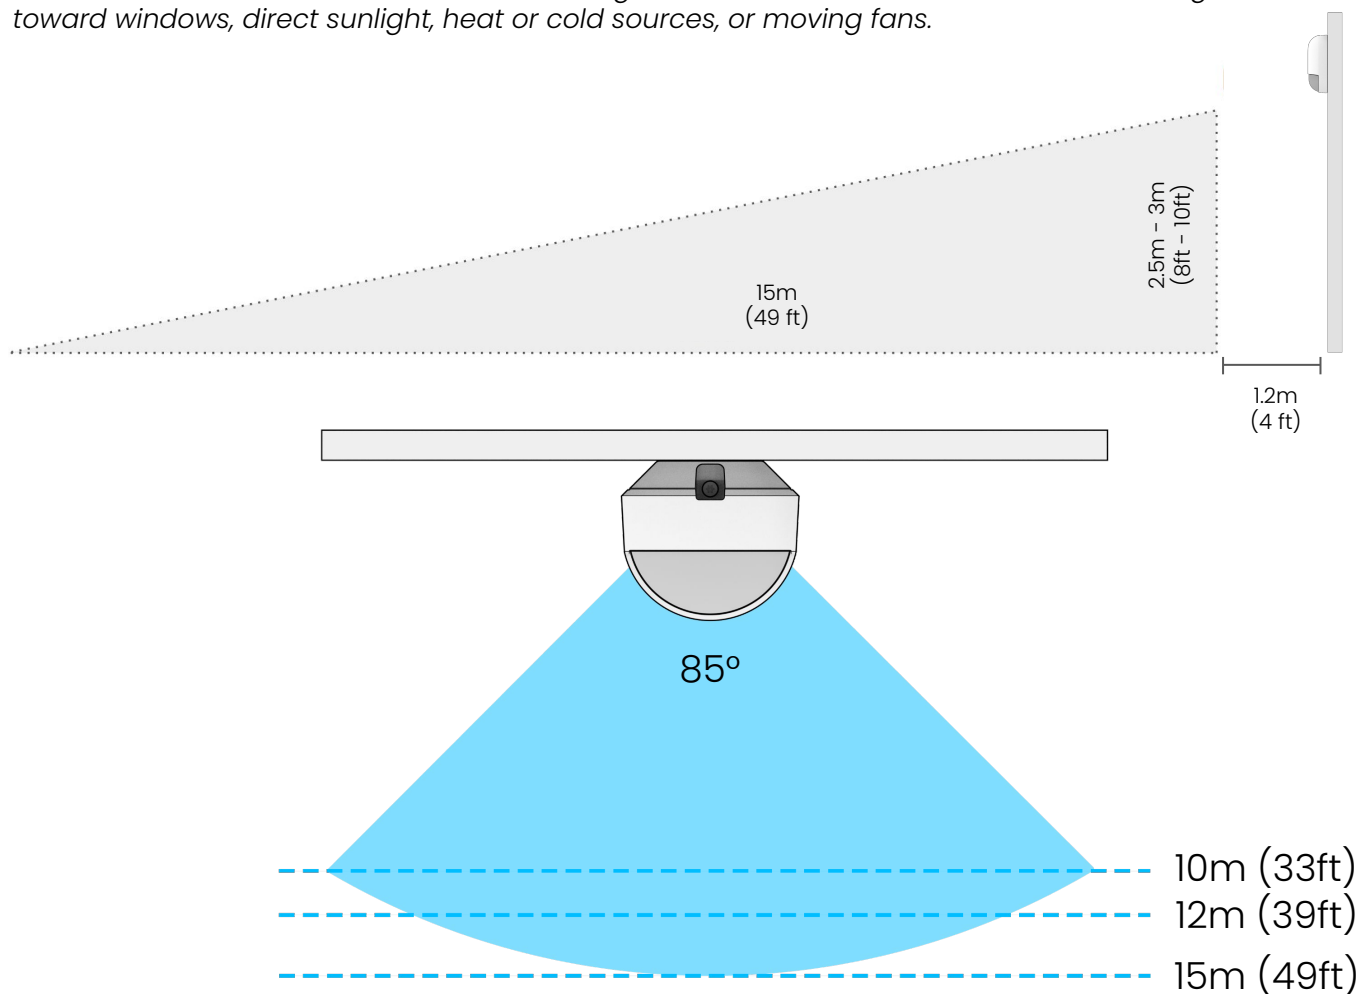


Mounting Options



Flush

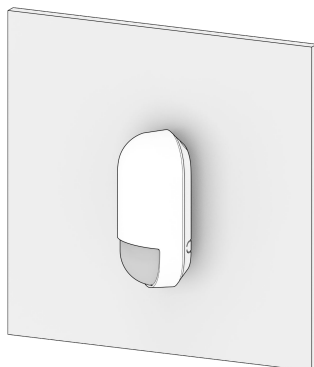

Angled




Corner

Installation

Mounting Option 1: Flush


To install the device flush against the wall, first drill two pilot holes into the divots of the mount plate.

Secure the mount plate to a flat surface using two screws.

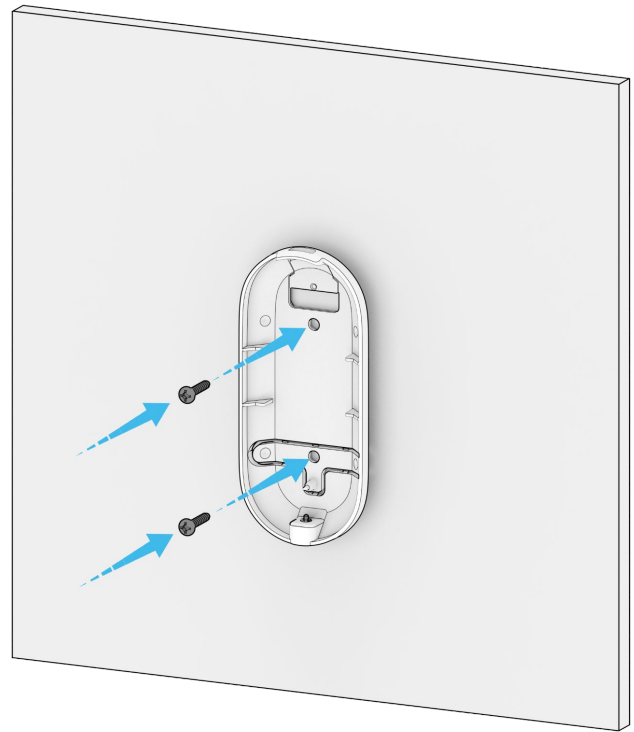

To install the device flush against the wall, first drill two pilot holes into the divots of the mount plate before driving the wall anchors through the holes.



Secure the mount plate to a flat surface using two screws.

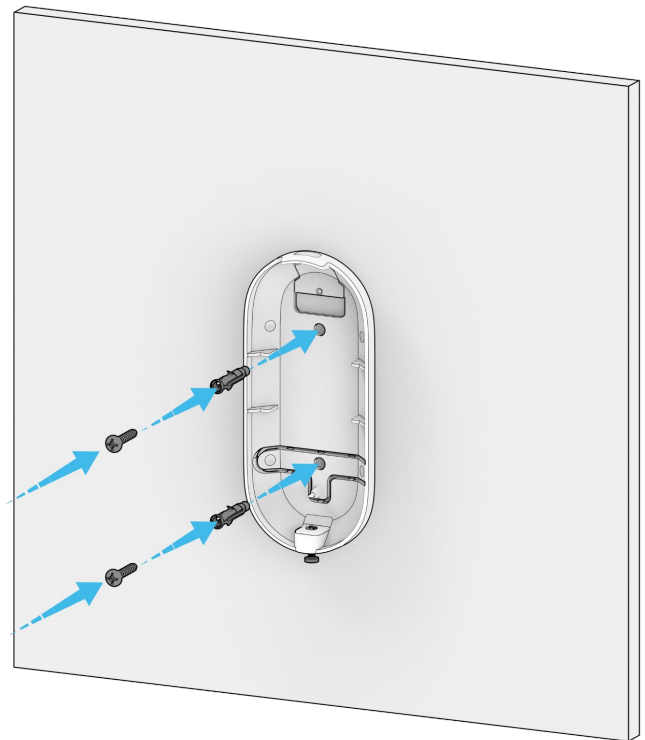


Installation

Mounting Option 3: Corner

To install the device in a corner, first drill two pilot holes into the divots of the mount plate.

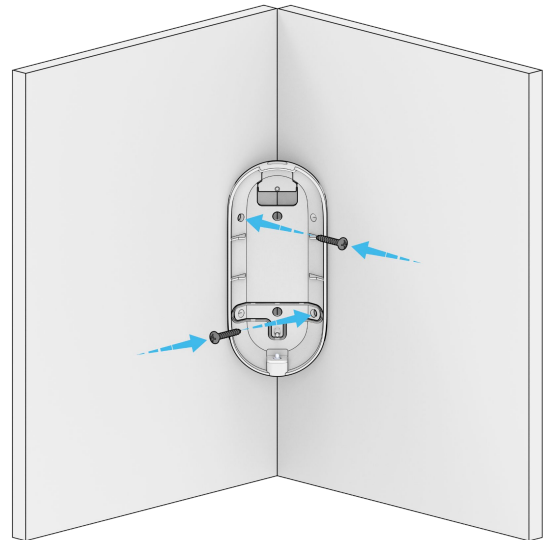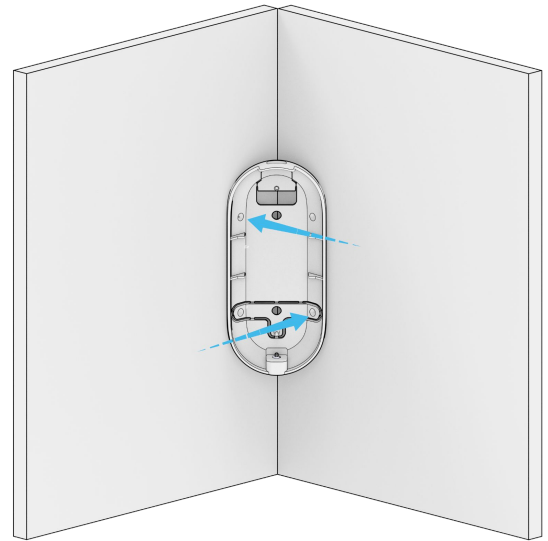


Secure the mount plate using two screws.

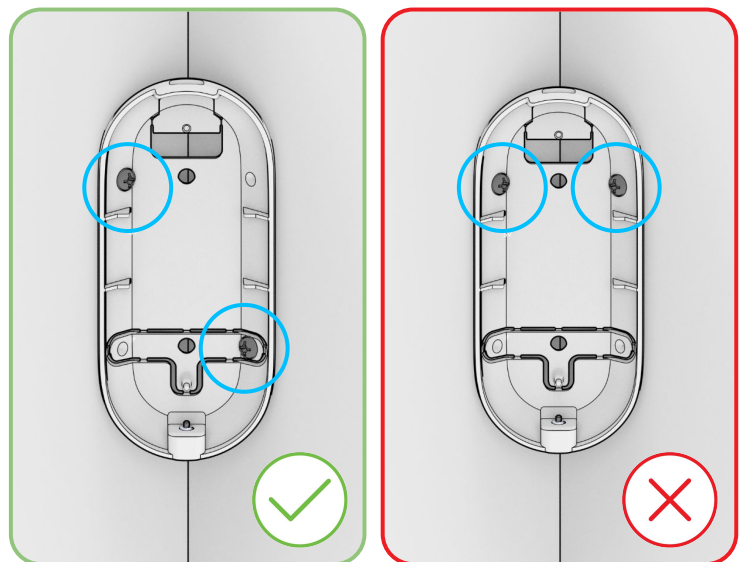


Installation

Mounting Option 2: Angled

To install the device on an angle against the wall, first drill two pilot holes into the divots of the mount plate.

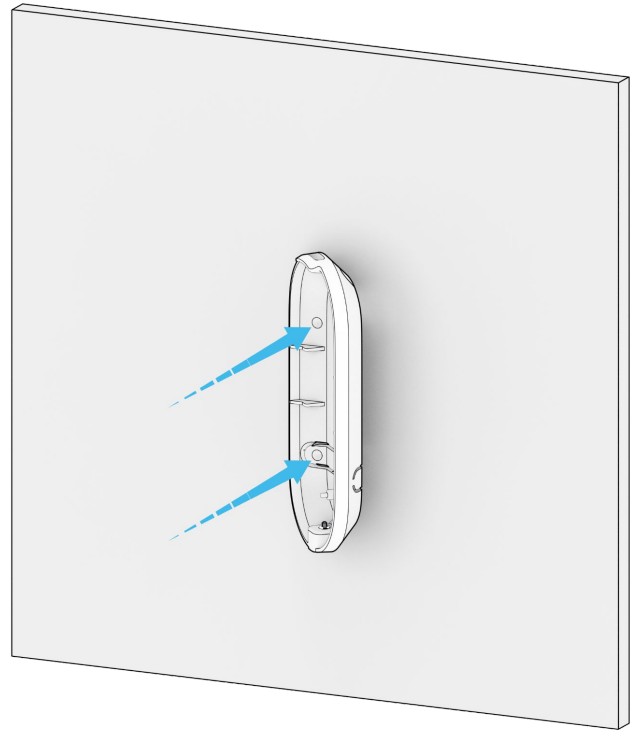


Secure the mount plate using two screws.

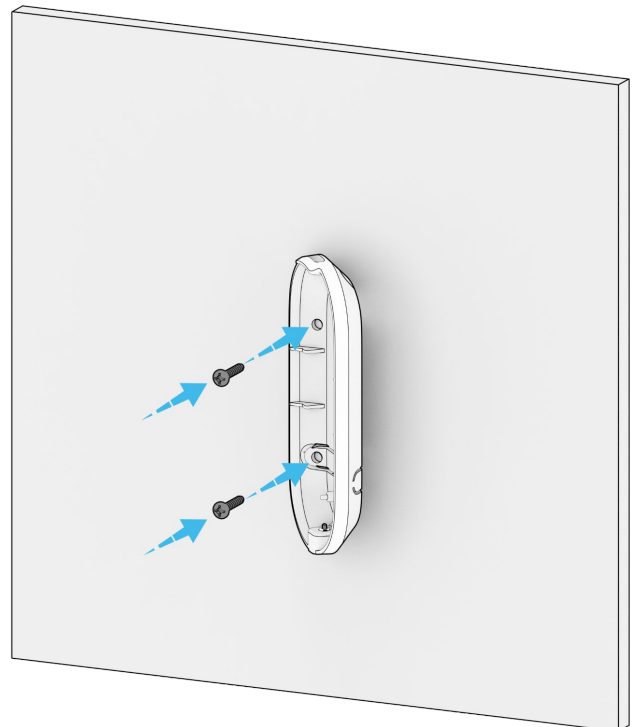


Installation

Mounting

After the mount plate is secured, engage the hook and swing the device toward the mount plate.

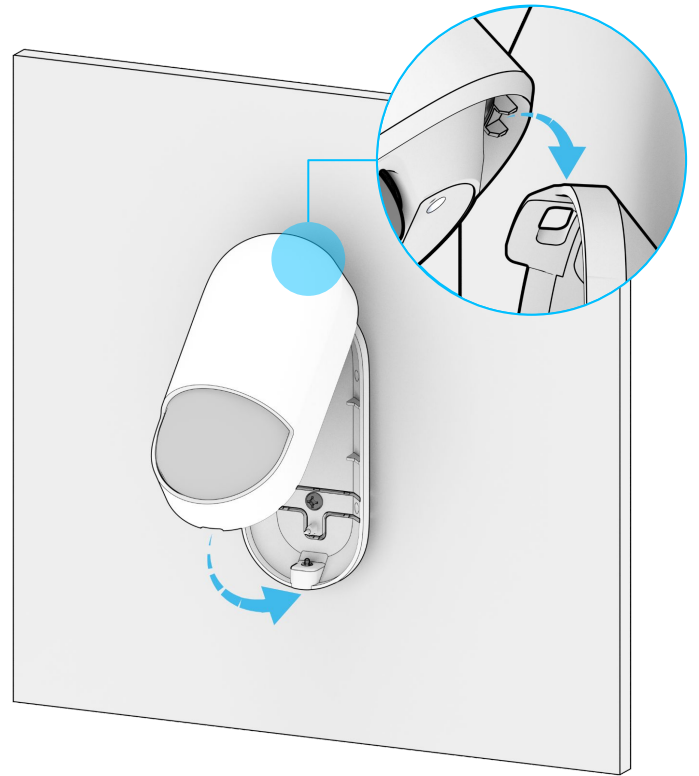

Use the provided T10 Security Torx L-Key to tighten the security screw at the bottom of the device.

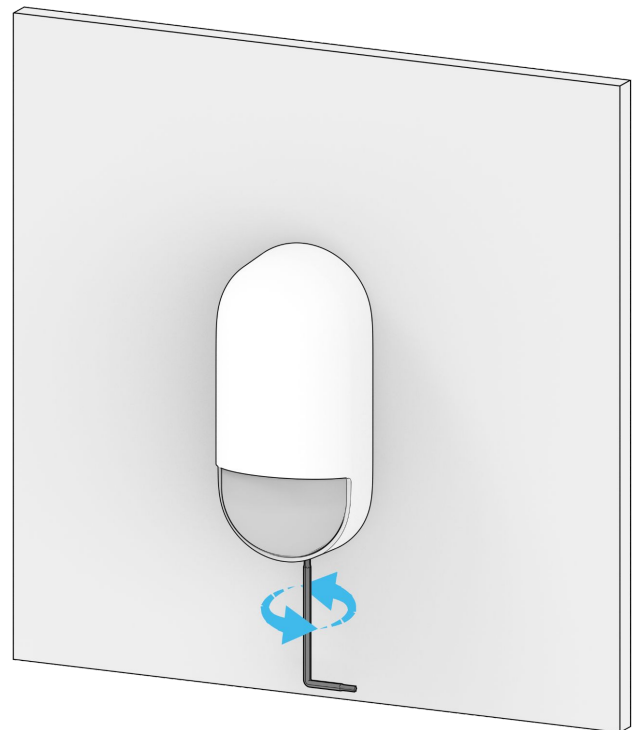

Appendix

Compliance

FCC Compliance	This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: —Reorient or relocate the receiving antenna. —Increase the separation between the equipment and receiver. —Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. —Consult the dealer or an experienced radio technician for help. FCC Radiation Exposure Statement : This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.
ISED Compliance	This device complies with ISED's licence-exempt RSSs. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Le présent appareil est conforme aux CNR d'ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable. IC Radiation Exposure Statement: This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. Déclaration d'exposition aux rayonnements d'IC : Cet équipement est conforme aux limites d'exposition aux rayonnements IC RSS-102 définies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.

Appendix

Compliance

UL 639	This device was evaluated by UL for a minimum battery life of 1 year. This device must be manually triggered at least once per year to verify operations. VLink transceiver with internal antenna operating frequency was evaluated and verified by UL within the 915~915.7MHz band. System compatibility and range performance were verified for UL 639 compliance using Verkada BP52-HW-NA Alarm Panel. Caution: The cell used in this device may present a fire or chemical burn hazard if mistreated. Do not disassemble, heat above 100°C (212°F) or incinerate. Use only Energizer Ultimate Lithium L91 AA, 1.5VDC, 3000mAh (two provided) replacement batteries; using any other battery type may result in a risk of fire or explosion. Dispose of used cell promptly. Keep away from children. This device must be installed at a minimum signal strength of -85 dBm or better. To verify signal strength, go to the pertinent sensor in Verkada Command and hover over the signal bars to see the RSSI value. If the signal value is below -85 dBm, add additional hubs or a WH32 repeater. Before signing off on the installation, run a walk test in Command (Alarms > Site > Walk Test) to verify all sensors and zones are functioning correctly.
--------	---



Appendix

Support

Thank you for purchasing this Verkada product. If for any reason you're experiencing issues or need assistance, please contact our 24/7 Technical Support Team immediately.

Sincerely,
The Verkada Team
verkada.com/support

